



# DELABIE

## time flow tapware & showers

---

SELF CLOSING SOLUTIONS  
SAVE WATER & IMPROVE HYGIENE  
VANDAL RESISTANT

 **ENWARE**

installing **confidence**

[www.enware.com.au](http://www.enware.com.au)

# water is our most precious natural resource

**PRECIOUS WATER NEEDS TO BE MANAGED IN AN ECONOMICAL AND AN ECOLOGICAL WAY, NOW AND FOR FUTURE GENERATIONS. THE ENWARE-DELABIE TIME FLOW RANGE IS PART OF OUR COMMITMENT TO PROVIDING PRACTICAL SOLUTIONS, SO WE CAN ALL MAKE A DIFFERENCE.**

## WATER AND ENERGY SAVINGS

Water wastage can account for a large percentage of consumption. Enware-Delabie time flow tapware features automatic shut-off which helps with minimising water wastage whilst still delivering a practical and comfortable service to the user.

- Predetermined flow rate minimises excessive water usage
- Automatic shut-off ensures the tap is turned off after use
- Enware's Time Flow tapware is WELS registered to deliver Basix, PIC and other regulatory authority compliances



### HYGIENE AND COMFORT

- Push button activation
- Lever options on some models, ideal for accessible and child care applications
- Automatic touch-free shut-off reduces hand cross-contamination risk



### ADJUSTABLE TEMPERATURE CONTROL FOR MIXERS

- All in one push button activation
- Simply turn the control knob to adjust temperature



### VANDAL RESISTANT

- Shock proof mechanisms
- Chrome plated solid brass construction



### NEW TEMPOSOFT OPTIONS

- Single control washbasin tap and wall mounted basin tap
- Easy to use
- Soft-push operation

**ENWARE**  
installing confidence

**DELABIE**



## WATER EFFICIENCY

Enware's Time Flow tapware is supplied standard with a WELS rated 4 star water efficiency rating. Also available in WELS 3, 5 and 6 star water efficiency ratings. Enware's showers are supplied standard with a WELS 3 Star (8lpm) water efficiency rating.



**WaterMark**  
AS/NZS 3718 WMKA 1583  
SAI Global

Enware Time Flow tapware is an Australian WaterMark approved product.

# TIME FLOW TAPWARE


## TEMPOSOFT TIME FLOW BASIN PILLAR TAP

### SINGLE CONTROL WASHBASIN TAP WITH EASY TO USE, SOFT-PUSH OPERATION

- Soft-push activation
- Approximately 7 seconds\* flow time (±3)#
- Automatic shut-off without manual contact

Order Code:  
**TFC740510** - 7 Seconds

6 Star (5.5 lpm) water efficiency rating supplied as standard.




## TEMPOSOFT TIME FLOW WALL BIB TAP

### SINGLE CONTROL WALL MOUNTED BASIN TAP WITH EASY TO USE, SOFT-PUSH OPERATION

- Soft-push activation
- Approximately 7 seconds\* flow time (±3)#
- Automatic shut-off without manual contact

Order Code:  
**TFC741510** - 7 Seconds

6 Star (5.5 lpm) water efficiency rating supplied as standard.




## TEMPOMIX BASIN MIXER TAP - PUSH BUTTON

### SINGLE CONTROL AUTOMATIC SHUT-OFF BASIN MIXER WITH TEMPERATURE ADJUSTABILITY

- Shut-off delay - 15 seconds\*
- Dual fixing points for anti-rotation
- Stainless steel flexible connectors

Order Code:  
**TFC795100** - 15 Seconds

4 Star (7.7 lpm) water efficiency rating supplied as standard.  
Also available in 3 (9.1 lpm), 5 (5.9 lpm) and 6 (5.6 lpm) Star ratings.




## TEMPOSTOP BASIN PILLAR TAP - PUSH BUTTON

### AUTOMATIC SHUT-OFF PILLAR TAP

- Flow straightener
- Shut-off delay - 3, 7 or 15 seconds\*

Order Code:  
**TFC745P** - 7 seconds  
**TFC745** - 15 seconds  
**TFC745P3** - 3 seconds

4 Star (7.7 lpm) water efficiency rating supplied as standard.  
Also available in 3 (9.1 lpm), 5 (5.9 lpm) and 6 (5.6 lpm) Star ratings.




## TEMPOSTOP BASIN PILLAR TAP - LEVER

### AUTOMATIC SHUT-OFF LEVER OPERATED PILLAR TAP

- Flow straightener
- Shut-off delay - 3, 7 or 15 seconds\*
- Recommended for children, the elderly & disabled

Order Code:  
**TFC745L** - 7 seconds  
**TFC745L15** - 15 seconds  
**TFC745L3** - 3 seconds

4 Star (7.7 lpm) water efficiency rating supplied as standard.  
Also available in 3 (9.1 lpm), 5 (5.9 lpm) and 6 (5.6 lpm) Star ratings.



# TIME FLOW TAPWARE

## TEMPOSTOP BIB TAP - PUSH BUTTON

### AUTOMATIC SHUT-OFF PUSH BUTTON BIB TAP

- Shut-off delay - 3, 7 or 15 seconds\*
- Flow straightener


**Order Code:**

**TFC746P** - 7 seconds

**TFC746** - 15 seconds

**TFC746P3** - 3 seconds

4 Star (7.7 lpm) water efficiency rating supplied as standard.  
Also available in 3 (9.1 lpm), 5 (5.9 lpm) and 6 (5.6 lpm) Star ratings.



## TEMPOSTOP BIB TAP - LEVER

### AUTOMATIC SHUT-OFF LEVER OPERATED BIB TAP

- Shut-off delay - 3, 7 or 15 seconds\*
- Flow straightener
- Recommended for schools, the elderly & disabled


**Order Code:**

**TFC746L10** - 7 seconds

**TFC746L15** - 15 seconds

**TFC746L3** - 3 seconds

4 Star (7.7 lpm) water efficiency rating supplied as standard.  
Also available in 3 (9.1 lpm), 5 (5.9 lpm) and 6 (5.6 lpm) Star ratings.



# TIME FLOW RETRO-FIT TAPWARE

## TIMED FLOW RETROFIT ADAPTOR - PILLAR/BIB TAP


### AUTOMATIC SHUT-OFF VALVE

- Shut off delay - 3 or 15 seconds on request\*
- Retro-fits to AS/NZS compliant pillar and bib tap bodies

**Order Code:**

**TFC794** - 7 seconds

4 Star (7.7 lpm) water efficiency rating supplied as standard.  
Also available in 3 (9.1 lpm), 5 (5.9 lpm) and 6 (5.6 lpm) Star ratings.



## TIMED FLOW RETROFIT ADAPTOR - RECESSED


### AUTOMATIC SHUT-OFF VALVE

- Shut-off delay - 15 seconds (3 or 7 seconds on request)\*
- Retro-fits to AS/NZS compliant recess bodies

**Order Code:**

**TFC794R** - 15 seconds

4 Star (7.7 lpm) water efficiency rating supplied as standard.  
Also available in 3 (9.1 lpm), 5 (5.9 lpm) and 6 (5.6 lpm) Star ratings.



# ELECTRONIC TIME FLOW OPTIONS

## ENMATIC WALL MOUNTED TOUCH BUTTON TIME FLOW


- Default 6 seconds (programmable to 12 or 18 seconds)
- Mains power - 24V
- 205mm or 250mm reach spout options

**Order Code:**

**ENM5073-205** - 205mm reach spout

**ENM5073-250** - 250mm reach spout

5 star (5.9 lpm) water efficiency rating supplied as standard.  
Also available in 3 star (9.1 lpm), 4 star (7.7 lpm) and 6 star (5.6 lpm) ratings.



## TOUCH ACTIVATED TIME FLOW SINGLE BUTTON CONTROL - SHOWER


### CONTROL SHOWER TIMES IN PUBLIC SHOWERS IN SWIMMING CENTRES, SCHOOLS AND SPORTING FACILITIES

- Programmable flow time to suit your application (3 seconds - 6 minutes)\*
- Electronic control for more accurate flow times
- Lock-out timing option available to prevent continued use

**Order Code:**

**EMD811** - Mains Powered

WELS 3 Star (7.7 lpm) water efficiency rating supplied as standard  
Also available in 2 (9.1 lpm) 5 (5.6 lpm) Star ratings



\* Times are indicative only and may vary depending on the water supply pressure, temperature and flow conditions.


# TIME FLOW SHOWER VALVES

## TEMPOMIX SHOWER MIXER – RECESSED

### SINGLE CONTROL AUTOMATIC SHUT-OFF SHOWER MIXER WITH TEMPERATURE ADJUSTABILITY

- Shut-off delay - 30 seconds\*
- M1/2" inlet/outlet
- Stainless steel wall plate Ø195mm

Order Code: **TFC790925** - 30 seconds  
See below for WELS registered shower heads.




## TEMPOSTOP SHOWER VALVE – RECESSED

### AUTOMATIC SHUT-OFF SHOWER VALVE SINGLE TEMPERATURE

- Shut-off delay - 30 seconds\*
- F1/2" inlet/outlet
- Stainless steel wall plate Ø130mm

Order Code: **TFC749128** - 30 seconds  
See below for WELS registered shower heads.




## TEMPOSTOP SHOWER VALVE 30 – EXPOSED

### AUTOMATIC SHUT-OFF SHOWER VALVE SINGLE TEMPERATURE

- Shut-off delay - 30 seconds\*
- M1/2" inlet/outlet

Order Code: **TFC749** - 30 seconds  
See below for WELS registered shower heads.




## TEMPOSTOP SHOWER VALVE 15 – EXPOSED

### AUTOMATIC SHUT-OFF SHOWER VALVE SINGLE TEMPERATURE

- Shut-off delay - 15 seconds\*
- Straight type - in line connection
- M1/2" inlet/outlet

Order Code: **TFC747** - 15 seconds  
See below for WELS registered shower heads




# SHOWER HEADS

## TONIC JET VANDAL RESISTANT SHOWER HEAD

### VANDAL AND SCALE RESISTANT FIXED SHOWER HEAD

- Vandal resistant fixing with anti-rotation lug
- Inlet M1/2", removable for F1/2"
- Adjustable angle of spray (angle of spray can be preset by installer)

Order Code: **TFC712000**  
3 Star (8 lpm) water efficiency rating supplied as standard.




## ROUND VANDAL RESISTANT SHOWER HEAD

### VANDAL AND SCALE RESISTANT FIXED SHOWER HEAD

- Vandal resistant fixing with anti-rotation lug
- Chrome plated heavy brass
- Adjustable angle of spray (angle of spray can be preset by installer)
- Inlet M1/2", removable for F1/2"

Order Code: **TFC709000**  
3 Star (8 lpm) water efficiency rating supplied as standard.




## VANDAL RESISTANT FIXED SHOWER HEAD

### SCHOOL PATTERN SHOWER HEAD

- Vandal resistant fixing
- Conical design
- Inlet F1/2"

Order Code: **VP310**  
3 Star (8 lpm) water efficiency rating supplied as standard.




## VANDAL RESISTANT FIXED SHOWER HEAD

### DETENTION CONICLE SHOWER HEAD

- Vandal resistant fixing with anti-rotation lug
- Anti-ligature conical design
- Inlet F1/2"

Order Code: **DET660**  
3 Star (8 lpm) water efficiency rating supplied as standard.



\* Times are indicative only and may vary depending on the water supply pressure, temperature and flow conditions.

# TIME FLOW SHOWER MODULES


## TEMPOMIX SHOWER MODULE - ANODISED ALUMINIUM PANEL

### SINGLE CONTROL AUTOMATIC SHUT-OFF SHOWER MIXER WITH TEMPERATURE ADJUSTABILITY

- High resistance to vandalism
- Temperature control by user
- Maximum temperature can be limited by the installer
- Automatic shut-off delay 30 seconds
- Solid brass shower head
- Scale resistant shower head
- Adjustable angle of spray (angle of spray can be preset by installer)
- Anodised aluminium module face panel
- Bright chrome finish on shower head and button
- Flexible hose inlets with female 1/2" connections

Order Code:  
**TFC790310**

*3 Star (8 lpm) water efficiency rating supplied as standard.*

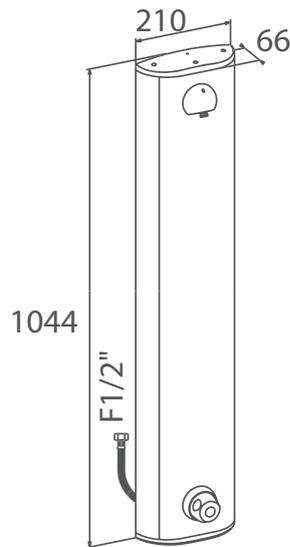


## TEMPOMIX SHOWER MODULE - STAINLESS STEEL PANEL

### SINGLE CONTROL AUTOMATIC SHUT-OFF SHOWER MIXER WITH TEMPERATURE ADJUSTABILITY

- High resistance to vandalism
- Temperature control by user
- Maximum temperature can be limited by the installer
- Automatic shut-off delay 30 seconds
- Solid brass shower head
- Scale resistant shower head
- Adjustable angle of spray (angle of spray can be preset by installer)
- Satin stainless steel finish on module face
- Bright chrome finish on shower head and button
- Flexible hose inlets with female 1/2" connections

Order Code:  
**TFC790110**

*3 Star (8 lpm) water efficiency rating supplied as standard.*

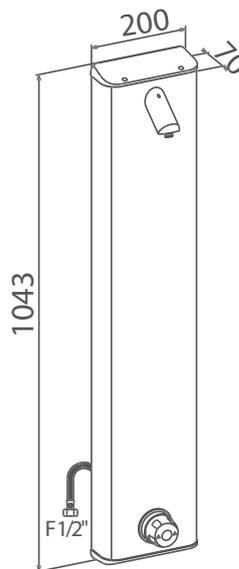


## TEMPOSTOP SHOWER MODULE - STAINLESS STEEL PANEL

### AUTOMATIC SHUT-OFF SHOWER VALVE SINGLE TEMPERATURE

- High resistance to vandalism
- Automatic shut-off delay 30 seconds
- Solid brass shower head
- Scale resistant shower head
- Adjustable angle of spray (angle of spray can be preset by installer)
- Satin stainless steel finish on module face
- Bright chrome finish on shower head and button
- Flexible hose inlets with female 1/2" connections

Order Code:  
**TFC749100**

*3 Star (8 lpm) water efficiency rating supplied as standard.*

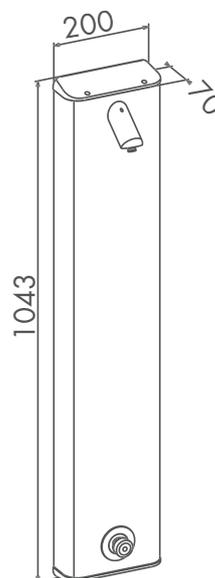

# STAINLESS STEEL COLUMN SHOWERS

**15 SECONDS SUPPLIED STANDARD, 3 OR 7 SECONDS AVAILABLE ON REQUEST**

Enware's stainless steel column showers are ideal for outdoor, beach and swimming pool applications.

The durable, vandal resistant design combines with water efficient time flow technology for automatic shut off.

Available in a variety of configurations for single or multiple showers with optional foot rinsing tapware.

**Order Code:**

**ECS400** - Quad Shower

**ECS401** - Quad Shower with Single Foot Wash

**ECS300** - Triple Shower

**ECS301** - Triple Shower with Single Foot Wash

**ECS200** - Double Shower (180° opposite)

**ECS201** - Double Shower (180° opposite) with Single Foot Wash


**ECS200A** - Double Shower (90° adjacent)

**ECS201A** - Double Shower (90° adjacent) with Single Foot Wash

**ECS100** - Single Shower

**ECS101** - Single Shower with Single Foot Wash

*For customised options please contact your Enware representative.*

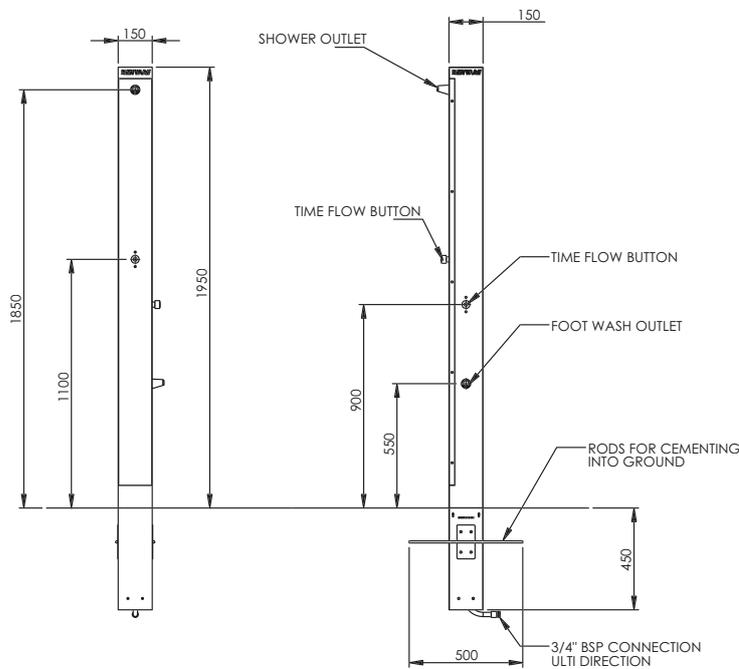

# TECHNICAL INFORMATION

## TIME FLOW TAPWARE

Finish:	Bright chrome	*Enware products are to be installed in accordance with AS/NZS3500. Heated Water Supply AS/NZS 3500.4: For all sanitary fixtures used primarily for personal hygiene purposes are to deliver heated water not exceeding: a) 45°C for early childhood centres, primary and secondary schools and nursing homes or similar b) 50°C in all other buildings.
Recommended Working Pressure:	350kPa	
Maximum Working Pressure (AS/NZS 3500)*:	500kPa	
Minimum-Maximum Rated Static Pressure:	50 - 500kPa*	
Water Temperature:	Maximum 50° C*	

## CONTACT US

1300 369 273 | [WWW.ENWARE.COM.AU](http://WWW.ENWARE.COM.AU) | [INFO@ENWARE.COM.AU](mailto:INFO@ENWARE.COM.AU)

## ABOUT US

We manufacturer commercial plumbing and safety solutions you can install with confidence. Our commitment of quality, insight and continual design improvement earns us a reputation for delivering high quality products. We deliver solutions that exceed your expectations today, and long into the future.

## OUR OFFICES

NEW SOUTH WALES | VICTORIA | SOUTH AUSTRALIA | WESTERN AUSTRALIA  
NORTHERN TERRITORY | QUEENSLAND | ASIA | MIDDLE EAST


## RELATED PRODUCTS



Spring Action Tapware



Vandal Resistant Tapware



Aquablend TMV Range



Electronic Tapware



IFO Scandinavian commercial sanitary ware



Carekit - Accessible Toilet Solutions

  
installing confidence

**DELABIE**

