



AMF THERMATEX[®]
Medical Range



Healthcare solutions for hygiene and acoustics	02
Cleanroom	06
Anti-microbial ceiling systems	08
Humidity resistance	10
Humidity resistance: THERMATEX® Aquatec	12
Cleaning	14
Acoustic room comfort	16
Sustainability	18



We offer healthcare solutions for the following areas:

- Hospitals
- Clinics
- Laboratories
- Doctors' surgeries
- Care homes
- Rehabilitation facilities

Key Performance

- Hygiene treatment for resistance to fungi and bacteria
- Paint sealed edges
- Washable and scrubbable
- Suitable for PC1 and PC2 laboratories
- Superior noise reduction of *NRC* 0.70 - 0.90
- Excellent sound attenuation of 28 dB - 42 dB
- High light reflectance of up to 88%
- Humidity resistance up to RH95% to RH100%
- Up to 30 year limited manufacturer's warranty

Balance between hygiene and acoustics

We at Knauf AMF understand the especially high demands that are placed on modern healthcare facilities to maintain the health and hygiene of specific rooms and their ceilings. In-room acoustics are often given less consideration but are equally important for good building design as well as patient and occupant comfort.

In patient areas, comfortable room acoustics increase the feeling of well-being and aid the healing process. A sound-optimised workspace is also important for those working in hospitals, care homes or laboratories, as too much noise disturbs concentration and can even lead to clinical signs of illness.

Different areas and activities in healthcare facilities demand very different acoustic requirements depending on their type of use. Consider that a corridor will require a different acoustic treatment to a patients' room or operating theatre.

Due to this need for individual solutions, we have developed the **THERMATEX® Medical Range**. The range not only fulfils the stringent hygiene requirements of the healthcare sector but also our high demands for fire protection and acoustic requirements. At the same time, the range offers a uniform aesthetic for every room regardless of the performance requirements.

Fungistatic

Low VOC

Recycled
Content

Product Warranty

Humidity Resistant



Anti Microbial

Sealed edges

Fully
Recyclable

Fire Resistance



The THERMATEX® Medical Range for healthcare facilities

Depending on the risk of infection present, rooms can be divided into different groups. The products stated here are examples and recommendations. The ceiling to be installed is to be specified dependent on the actual room situation and its requirements. Should you require advice, please don't hesitate to contact us on +49 8552 422-0, or via email info@knaufamf.de



A Area A
low hygienic relevance

- Offices/administrative areas
- Foyers
- Corridors

B Area B
average hygienic relevance

- Examination rooms
- Laboratory areas
- Patient rooms
- Sanitary rooms
- Kitchen areas
- Bathrooms

C Area C
high hygienic relevance

- Operating theatres
- Intensive care

 Fire protection

Whether you require a fire resistant construction or a fire protective ceiling, Knauf AMF offers different system solutions for both structural and independent fire protection. They contribute to fire protection whilst harmoniously integrating into the room concept design.



Care centre Orestades,
Denmark

AMF THERMATEX® surfaces	Class A	Class B	Class C	Surface	Hygiene (ASTM G21 / G22)	Cleanroom classification (ISO 14644-1)	Scrubability (ASTM D-2486) modified	Washability (ASTM D-4828) modified	Humidity	Permeability (DIN 18177)	Sound absorption (EN ISO 354)	Sound attenuation (as per ASTM E413-1/E1264 or EN ISO 10848)	Building material class (EN 13501-1/-2)
THERMATEX® Aquatec Medical (19 mm Thickness)				fleece facing	anti- microbial treatment against bacteria and fungi	ISO 3	✓	✓	up to 100 % RH	PM1 (≤ 30 m³/hm²)	$\alpha_w = 0.90$ NRC = 0.90	28 dB CAC	A2-s1, d0
THERMATEX® dB Aquatec Medical (19 mm Thickness)				fleece facing	anti- microbial treatment against bacteria and fungi	-	✓	✓	up to 100 % RH	PM1 (≤ 30 m³/hm²)	$\alpha_w = 0.70$ (H) NRC = 0.70	37 dB D_{nfw}	A2-s1, d0
THERMATEX® Alpha Medical (19 mm Thickness)				fleece facing	anti- microbial treatment against bacteria and fungi	ISO 4	✓	✓	up to 95 % RH	PM1 (≤ 30 m³/hm²)	$\alpha_w = 0.95$ (H) NRC = 0.90	28 dB D_{nfw}	A2-s1, d0
THERMATEX® dB Alpha Medical (22 mm Thickness)				fleece facing	anti- microbial treatment against bacteria and fungi	-	✓	✓	up to 95 % RH	PM1 (≤ 30 m³/hm²)	NRC = 0.80	40 dB CAC	A2-s1, d0
THERMATEX® Acoustic Medical (19 mm Thickness)				fleece facing	anti- microbial treatment against bacteria and fungi	ISO 4	✓	✓	up to 95 % RH	PM1 (≤ 30 m³/hm²)	$\alpha_w = 0.65$ (H) NRC = 0.70	38 dB D_{nfw}	A2-s1, d0
THERMATEX® dB Acoustic 24 Medical (24 mm Thickness)				fleece facing	anti- microbial treatment against bacteria and fungi	-	✓	✓	up to 95 % RH	PM1 (≤ 30 m³/hm²)	$\alpha_w = 0.65$ (H) NRC = 0.70	42 dB CAC	A2-s1, d0

Cleanroom application areas

- Laboratories
- Intensive care
- Operating theatres

Air purity according to ISO 14644-1	
Turbulent flow	1
	2
	3
	4
	5
Laminar flow	6
	7
	8
	9



Cleanrooms in healthcare areas

Cleanrooms are essential for medical research and the handling and sterile production of pharmaceuticals. They enable different parameters, such as particle number, germ number, temperature, humidity, and pressure to be exactly monitored and controlled. This ensures that the existing air and intake air has a high purity and fulfils all cleanliness criteria. This helps to protect patients and ensures the quality of medical products.


Air purity classification

The air purity classification according to EN ISO 14644 is the most well-known standard in the area of cleanroom technology. It states the maximum number of particles in the ambient air and divides the cleanrooms into classes from ISO 1 to ISO 9, with class 1 being the highest specification for air purity.


Cleanroom classification of the THERMATEX® Medical Range:
ISO Class according to ISO 14644-1

ISO 3	THERMATEX® Aquatec Medical
ISO 4	THERMATEX® Alpha Medical THERMATEX® Acoustic Medical

* Joints sealed with acrylic

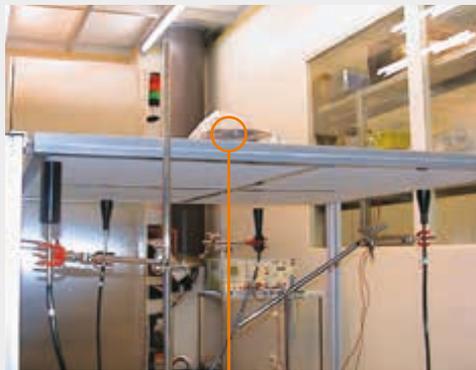

Reference loading through load speakers vibrations

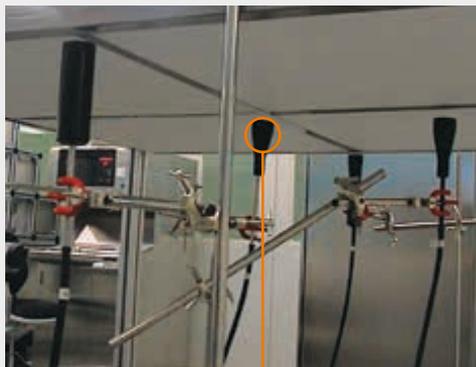

Measuring sensor (x4)

Testing method


Highly sensitive measuring equipment can determine the number of particles present in the ambient air of cleanrooms. Determining the number of airborne particles enables the classification of materials. Cleanrooms are classified depending on the number of measured particles per cubic metre. The only particle groups to be considered are those with a cumulative frequency distribution between the critical particle sizes (lower limit) of 0.1 µm and 5 µm.



INCOR Hospital
Brazil



Sírio Libanês Hospital
Brazil

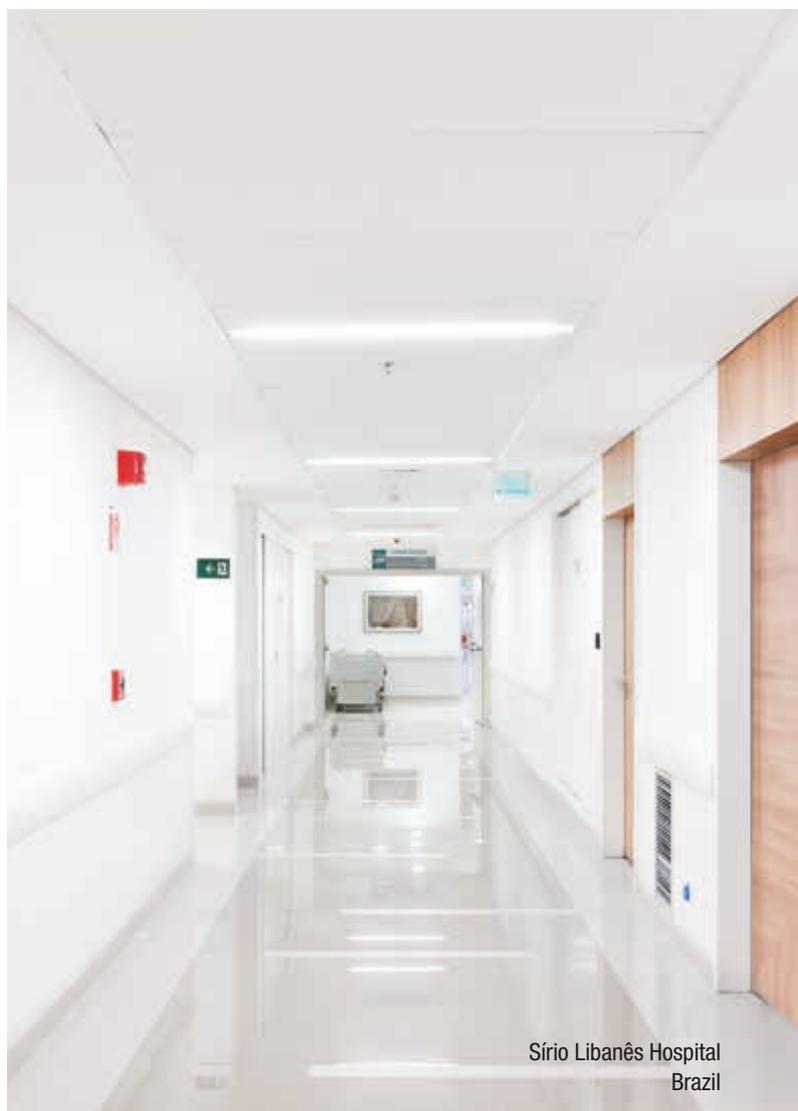

Sírio Libanês Hospital
Brazil



Application areas

- Clinics
- Hospitals
- Laboratories
- Patient's rooms
- Treatment rooms
- Disinfection rooms
- Consultation rooms

Particularly suitable
Knauf AMF Medical products:

- THERMATEX® Acoustic Medical
- THERMATEX® dB Acoustic 24 Medical
- THERMATEX® Aquatec Medical
- THERMATEX® dB Aquatec Medical
- THERMATEX® Alpha Medical
- THERMATEX® dB Alpha Medical



THERMATEX® Medical Range

Hygena for the highest demands

Due to the high utilisation of hospitals and clinics by people with an existing illness, the risk of the spread of pathogens and further infection increases. To prevent this, a multitude of national and international regulations must be taken into account during the planning stage. These may include the guidelines for hospital hygiene and preventing infection EN ISO 14644 or DIN 1946.

Antimicrobial Treatment

- Tested to ASTM G 21/G 22 for resistance to fungi and bacteria.
- Achieves resistance to bacterial strains of *Bacillus subtilis*, *Escherichia coli*, *Staphylococcus epidermidis*, and *Saccharomyces cerevisiae*.
- Achieves resistance to fungus strains of *Aspergillus niger*, *Paecilomyces variotii*, *Gliocladium virens*, *Penicillium funiculosum* and *Chaetomium globosum*.





Technical Performance

Sealed Edges

- Tested to 14644-1:1999 for Clean Room performance
- Achieves ISO Class 3 for THERMATEX® Aquatec and ISO Class 4 for THERMATEX® Acoustic
- ISO Class 3 is defined as having max. particle emission of 1,000 particles m³ of air (>0.1µm)
- ISO Class 4 is defined as having max. particle emission of 10,000 particles m³ of air (>0.1µm)

Volatile Organic Compounds

- Tested to ISO 16000-3:2001 and ISO 16000-6:2004 for VOC emission
- Achieves 'suitable for indoor use' as per the German AgBB-Scheme
- Achieves emission rating of 0.0064mg/m³ defined as 'low emitting' by having less than 0.009mg/m³

Cleanability

- Tested to ASTM D-2486 (modified) for Scrubbability - 2,000 cycles
- Tested to ASTM D-4828 (modified) for Washability - 200 cycles
- Acceptable disinfectant agents include:
 - Sodium hydroxide
 - Sodium hypochlorite
 - Hydrogen peroxide
 - Isopropanol
 - Dodecylbenzene sulfonate

Cleaning Guidelines

- Clean panels with water or a mild detergent solution
- Wipe or spray surface with a suitable disinfectant cleaning agent and dry with a soft cloth
- All THERMATEX® ceilings can be dusted with a dry cloth and washed with a damp cloth



INCOR Hospital
Brazil



Humidity resistance

Application areas

- Sensitive rooms in healthcare facilities
- Sanitary facilities
- Kitchens
- Swimming pools and wellness facilities


Did you know?

People constantly emit water to their environment. Alone during sleep, a person emits half to one litre of water per night through the skin and respiratory air. Aside this, the absorbing capacity of air is utilised when showering, washing etc., which for example, amounts to approximately 6-12 litres per day for a 4 person household.



Humidity resistance for a long service life

In healthcare facilities, many people and processes come together which can quickly lead to an increase in humidity. The regular cleaning of surfaces also contributes. In order to withstand cleaning and increased humidity in the long-term, surfaces in healthcare facilities must be especially humidity resistant.

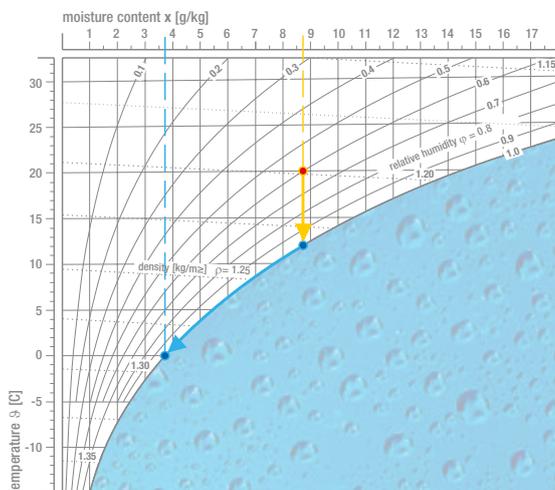

Example with 1 bar air pressure

At 20°C the total absorption capacity of air is approximately 14.7g/kg. If instead, the actual water content was 8.7g/kg (=absolute humidity), this would result in a relative humidity of 60%. If this air were then cooled, the water content would not change, however the absorption capacity of the air reduces. As a consequence the relative humidity increases to an extent, until at approximately 12°C, saturation is reached, beyond which no more water vapour can be absorbed (dew point). By further cooling, the excess water vapour condenses and leads to water droplet formation. Air at 0°C, can in comparison only absorb a maximum of 3.7g/kg of water until it reaches saturation.

$\vartheta = 20^{\circ}\text{C}$	$x = 14.7\text{g/kg}$	$\varphi = 100\%$
$\vartheta = 20^{\circ}\text{C}$	$x = 8.7\text{g/kg}$	$\varphi = 60\%$
$\vartheta = 0^{\circ}\text{C}$	$x = 3.7\text{g/kg}$	$\varphi = 100\%$

If unsuitable materials are used in these critical areas with increased humidity, it can lead in many cases to adverse visual effects or even structural damage.

THERMATEx® Aquatec can be used under these conditions without any problems.



City Clinic Sofia,
Bulgaria



City Clinic Sofia,
Bulgaria



City Clinic Sofia,
Bulgaria

Humidity has a significant influence on the stability and structure of a mineral ceiling and therefore its longevity. High levels of water vapour content can lead in many cases to a loss of dimensional stability and deformation. Air behaves similarly to a sponge and can, dependent on the temperature, take in water in the form of vapour.



100 %
RH



THERMATEX® Aquatec Medical the optimum solution for high humidity

With THERMATEX® Aquatec Medical we offer you a ceiling tile specially developed for hygiene sensitive rooms with regularly high humidity. Due to its composition, it is humidity resistant up to 100% RH (relative humidity) and remains dimensionally stable in internal areas with high climatic demands.

Our ceiling systems are complemented with corrosion protected grid and accessories, as high humidity and corrosive pollutants can also affect the substructure. The ceiling tile is the ideal solution for healthcare areas. Thanks to its white, smooth fleece-coated surface, the tile can be easily cleaned, removing dust, dirt and possible deposits. This also effectively prevents the growth of bacteria and germs in humid ambient air.

Advantages of THERMATEX® Aquatec Medical


- 100% RH (rel. humidity)
- Washable as per ASTM D-4828
- Cleanroom class 3 according to ISO 14644-1
- Highly absorbing, $\alpha_w / NRC = 0.90$
(EN ISO 11654)
- White, smooth fleece-coated surface
- Anti-microbial coating

Installation THERMATEX® Aquatec Medical

AMF VENTATEC® grid is ideally suited for the standard installation of AMF THERMATEX® Aquatec Medical. The ceiling tiles and grid come from the same manufacturer and offer you the corresponding system advantages. The grid has been specially designed for high-quality AMF ceiling tiles and with its performance properties offers many advantages for designers, installers and distributors. AMF offers suitable solutions for all exposure classes (corrosion protection) according to EN 13964 and the respective installation systems. Please also observe the installation and cleaning guidelines for AMF THERMATEX® Aquatec Medical.


System C - exposed construction

- Visible grid construction
- Square edge (SK) or recessed (VT-S) edge configuration
- Quick and efficient installation
- Easily demountable for maintenance work
- Numerous international approvals and certificates

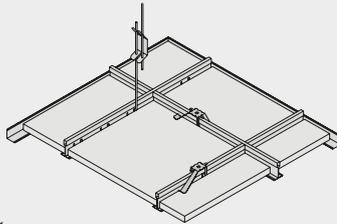


System A - concealed construction


- Concealed construction profiles
- Discreet, smooth optic
- Edge configuration AW/GN demountable
- Ceiling cavity retrospectively accessible

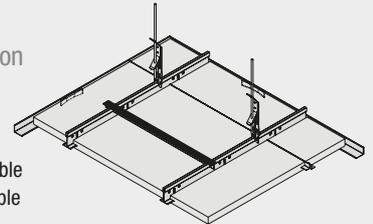

Edge configurations

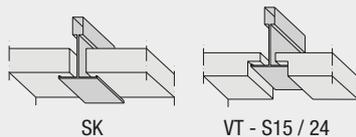


Edge configurations

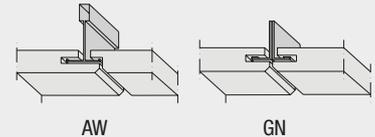

AMF corrosion resistant grid

When installing THERMATEX® Aquatec Medical in rooms with increased humidity (above 90% RH) a special grid with enhanced protection against corrosion should be used.

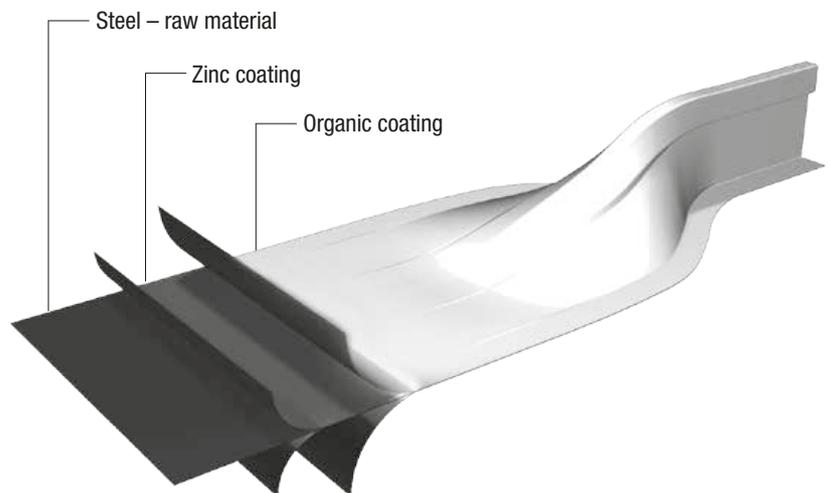

Class	Conditions	Application examples	Recommended substructure
A	Building components generally exposed to varying relative humidity up to 70% and varying temperature up to 25°C, but without corrosive pollutants.	Offices, shops, schools, hotels, sports halls, storage areas	Conventional grid system e.g. AMF VENTATEC®
B	Building components exposed to varying relative humidity up to 90% and varying temperature up to 30°C, but without corrosive pollutants.		
C	Building components exposed to relative humidity over 90% and a risk of condensation.	Shower rooms, food production (e.g. dairies, breweries), laundries	AMF Grid system with corrosion protection
D	More severe than the above.	Swimming pools chemical plants	

Cleaning



Cleaning the THERMATEX® Medical Range

In healthcare and care facilities, the ability to clean to a clinical level is essential to keep infection rates as low as possible. Therefore, all surfaces should be easy to clean.

Dry cleaning

- With a soft cloth, soft brush or vacuum cleaner.

Damp cleaning

- With a well wrung-out cloth or sponge. Ensure that the edges and the reverse sides of the tiles do not come into contact with humidity. Following cleaning, the surface should be dried with a soft cloth.

Wet cleaning

- With lukewarm water (up to 40°C), a sponge with a mild cleaning agent or following acceptable disinfectant agents:
 - Sodium hydroxide
 - Sodium hypochlorite
 - Hydrogen peroxide
 - Isopropanol
 - Dodecylbenzene sulfonate

Pressure cleaning

- THERMATEX® Aquatec Medical can be cleaned weekly with a high pressure cleaner, when the entire ceiling should be cleaned at the same time. The surface must be dried after cleaning. Pressure cleaning is only possible for ceilings installed on an exposed grid (SK edge) and with a corrosion resistant grid system. Cleaning guidelines and installation instructions must be adhered to.




Anti-dirt effect

The more air permeable a material is, the more dirt deposits will accumulate on the material. Due to low air permeability according to DIN 18177, Knauf AMF provides a reduced (dust) filter effect and therefore minimises the risk of contamination.



Cleanability

A surface must have the ability to be wet washed in order for it to be clinically clean. Moreover, the chemical resistance in terms of cleaning, process and disinfection reagents is especially important.

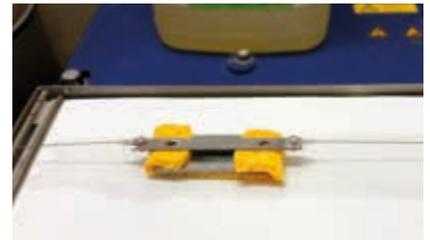

Scrubability tested according to modified ASTM D-2486

Unsoiled finished product was scrubbed with a nylon bristle brush.

AMF THERMATEX® Acoustic Medical	Test cycles (double strokes)	Result	Mass loss (scrubbed off)
Sample 1	200	A – No Break	Δ 0.09 g (< 1%)
Sample 2	2000	A – No Break	Δ 0.13 g (< 1%)

Washability tested according to modified ASTM D-4828

Unsoiled finished product covered in the runway of the sponge with agent – after 1 min. washed with a sponge soaked with same agent.

AMF THERMATEX® Acoustic Medical	Test cycles (double strokes)	Result
Mega Clean – triple 7	200	A – No Break

Applied Classification

A = No Break	D = 25% – 50% Severe
B = 0% – 10% Slight	E = 50% – 100% Very Severe
C = 10% – 25% Moderate	



Indoor Air Quality

Health risk assessment process for emissions of volatile organic compounds (VOC) from building products.

Volatile Organic Compounds

- Tested to ISO 16000-3:2001 and ISO 16000-6:2004 for VOC emission.
- Achieves 'suitable for indoor use' as per the German AgBB-Scheme.
- Achieves emission rating of 0.0064mg/m³ defined as 'low emitting' by having less than 0.009mg/m³.

Emission Values

Substance	Requirements Final Value 28 Days
Total organic compounds within the retention range $C_6 - C_{16}$ (TVOC)	$\leq 100 \mu\text{g}/\text{m}^3$
Total organic compounds within the retention range $> C_{16} - C_{22}$ (TSVOC)	$\leq 20 \mu\text{g}/\text{m}^3$
C substances	$\leq 1 \mu\text{g}/\text{m}^3$ per single value
Total VOC without LIC	$\leq 50 \mu\text{g}/\text{m}^3$
R value	≤ 1
Formaldehyde	$\leq 0.05 \text{ ppm}$



Quiet promotes healing and concentration

Clinics are not per se quiet places: activities from early in the morning until late into the evening create a constant sound level which can become excessive noise.

However, patients require lots of peace and quiet to heal quickly. Hospital or clinic staff are also dependent on a quiet workplace to enable them to concentrate and work effectively. Here, sound absorption plays an important role during the design and planning stage of the

acoustic room comfort. For example, noise from corridors should not transmit into the patient rooms; confidential conversations in doctors' rooms are private and shouldn't be transmitted through doors, walls and ceilings into other rooms.



What is sound absorption?

The energy of sound waves is absorbed or reflected from boundary surfaces as well as objects and people within a room. Sound absorption refers to the reduction of sound energy in a room through a sound wave losing energy through component surfaces.

The appropriate sound absorption ensures that the sound in a room is perceived as louder or quieter. Thus, it determines the acoustic well-being of a user in a room as it shortens the reverberation time, reduces the noise level and increases speech intelligibility.

The ability of a material to "swallow" sound waves depends on the materials composition. Porous, open-cell or perforated materials normally absorb sound very well.

"Good acoustic quality" describes the conditions in a room that enable the best possible transmission from a sound source to a listener.



Hospital St. Angers,
France



Doctors Surgery Kassel,
Germany



Hospital St. Angers,
France



What is sound attenuation?

A room's ceiling, along with all adjoining components between rooms, contributes to transmitting sound between rooms. It is therefore necessary that the ceiling material has the highest possible sound attenuation value. In contrast to the optimisation problem with sound absorption, here maximisation is important. Ceilings in the THERMAT[®] Medical Range achieve high sound attenuation values according to EN ISO 10848 and ASTM E413-1 and are therefore very well suited for reducing the sound transmission between rooms.



HQE®

Institut Bauen und Umwelt e.V.

Life cycle assessment

Recyclability

- Manufactured with electricity produced from 100% renewable energy as per carbon footprint report
- Bio-degradable and fully recyclable at end of life
- Bio-soluble mineral wool with bio-degradable acoustic fleece surface finish

Recycled Content

- Manufactured to ISO 14001 for Environmental Management audited by TÜV Germany
- Up to 34% Total recycled content
- Up to 21% Post-consumer recycled content
- Up to 16% Pre-consumer recycled content

Green Star

- THERMATEX® Medical Range may be used to achieve Green Star points based on Office Design v3
- Including: Daylight, Electric Lighting Levels, Internal Noise Levels, VOC, Formaldehyde Minimisation, Mould Prevention and Lighting Power Density

Guarantee

- Up to 10 Year manufacturer's warranty with THERMATEX® ceiling tile
- Up to 30 Year manufacturer's warranty with THERMATEX® and VENTATEC® ceiling grid

Raw materials and production

When selecting raw materials, **Knauf AMF** puts the greatest possible emphasis on natural materials: clay, perlite, bio-soluble mineral wool from stone and starch from corn and potatoes. Resource-friendly production is for us a matter of course. Energy optimised production planning, a closed water system within the plant and re-use of off-cuts and rejected goods are just a few examples of this.

Environment

Using "old" mineral tiles to produce "new" mineral tiles is a possible option of recycling. We are continually searching with our clients for environmentally friendly possibilities for re-use and using the materials in other products.

Transport

We systematically analyse our transport routes in terms of environmental aspects. This includes modern lorries, environmentally friendly transport by train or ship and as local as possible supply sources for our raw materials.

Recycling

In addition to re-utilising production waste, we also offer our clients the possibility to feed our products back into the recycling process after removal.

Certification – proof of performance

With our Environmental Management System according to ISO 14001 introduced in 2002, the compliance with all environmental regulations, balancing our environmental inputs and the continual improvement of environmental protection, is not only an integral part of what we do, but also public proof of our commitment.


Furthermore, we and our products have been awarded with numerous international environmental certificates (Type I, Type II and Type III declarations according to international harmonised ISO-Standards) for good environmental performance.





THERMATEX® Aquatec Medical

Thanks to its special composition, THERMATEX® Aquatec Medical shows moisture resistance of up to 100 % RH. This means that even with a high humidity and temperatures between 0 and 40°C the panel is inherently stable at all times. If necessary, THERMATEX® Aquatec Medical can be cleaned using water. Additionally, thanks to good sound absorption, the ceiling panel shows excellent acoustic features, which makes it a perfect solution for areas with strict hygiene requirements.

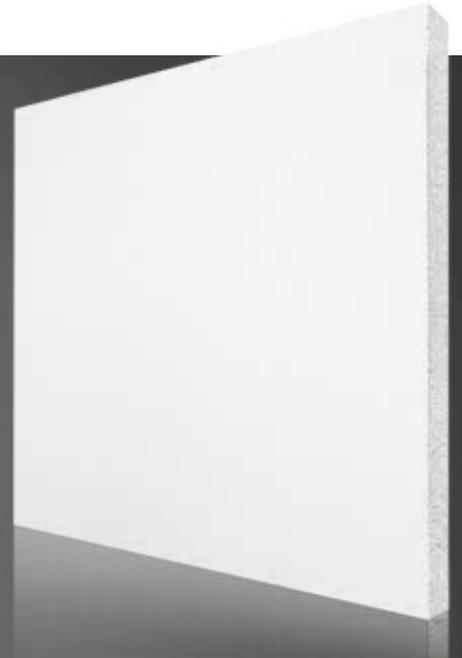


Technical performance

Building material class	A2-s1, d0 as per EN 13501-1
Sound absorption	Class A as per ASTM E1264 (tested according to ASTM E84) $\alpha_w = 0.90$ as per EN ISO 11654 and EN ISO 354 $NRC = 0.90$ as per ASTM C423 and ASTM E1264
Sound attenuation	$D_{n,f,w} = 28$ dB as per EN 717-1 and EN 10848 $CAC = 28$ dB as per ASTM E413-1 and ASTM E1264 (19 mm thickness, according to test certificate)
Light reflectance	up to 88 %
Thermal conductivity	$\lambda = 0.040$ W/mK as per EN 12667
Humidity	up to 100 % RH
Permeability	PM1 (30 m ³ /hm ²) as per DIN 18177
Clean room classification	ISO-class 3 as per ISO 14644-1
Hygiene	anti-microbial treatment against bacteria and fungi
Scrubability	tested as per ASTM D2486 (modified)
Washability	tested as per ASTM D4828 (modified)
Colour	white similar to RAL 9010

Sealed edges ✓

System	C Exposed Grid System, demountable ceiling A Concealed system, panels demountable
---------------	--

Sound absorption data

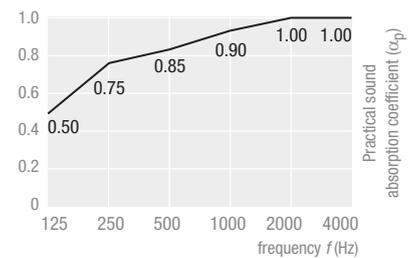

Available dimensions, edge details	Thickness / Weight 19 mm (c. 4,7 kg/m ²)		
	SK	VT-S 15/24	AW/GN
Please note minimum quantities and delivery times.			
600 x 600	✓	✓	✓

THERMATEX® dB Aquatec Medical

Thanks to its special composition, THERMATEX® dB Aquatec Medical shows moisture resistance of up to 100 % RH. This means that even with a high humidity and temperatures between 0 and 40°C the panel is inherently stable at all times. If necessary, THERMATEX® dB Aquatec Medical can be cleaned using water. Additionally, thanks to good sound absorption, the ceiling panel shows excellent acoustic features, which makes it a perfect solution for areas with strict hygiene requirements.




Technical performance

Building material class	A2-s1, d0 as per EN 13501-1
Sound absorption	Class A as per ASTM E1264 (tested according to ASTM E84) $\alpha_w = 0.70$ (H) as per EN ISO 11654 and EN ISO 354 $NRC = 0.70$ as per ASTM C423 and ASTM E1264
Sound attenuation	$D_{n,f,w} = 37$ dB as per EN 717-1 and EN 10848 (19 mm thickness, according to test certificate)
Light reflectance	up to 88 %
Thermal conductivity	$\lambda = 0.040$ W/mK as per EN 12667
Humidity	up to 100% RH
Permeability	PM1 (30 m ³ /hm ²) as per DIN 18177
Hygiene	anti-microbial treatment against bacteria and fungi
Scrubability	tested as per ASTM D2486 (modified)
Washability	tested as per ASTM D4828 (modified)
Colour	white similar to RAL 9010

Sealed edges ✓

System G Exposed Grid System, demountable ceiling

Sound absorption data

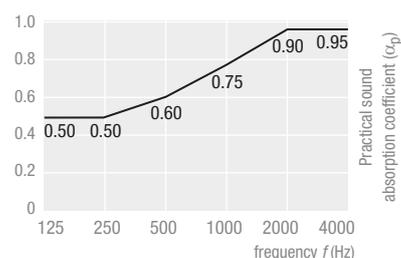

Available dimensions, edge details	Thickness / Weight 19 mm (c. 4,7 kg/m ²)	
	SK	VT-S 15/24
Please note minimum quantities and delivery times.		
600 x 600	✓	✓



THERMATEX® Alpha Medical

THERMATEX® Alpha Medical is a mineral ceiling tile providing high sound absorption. The light weight and perforations of the core board create a Class A sound absorber. With a strong white surface the appearance of THERMATEX® Alpha Medical is smooth and elegant. New generation bio-soluble mineral wool, clay and starch, contribute to the excellent acoustic performance.




Technical performance

Building material class	A2-s1, d0 as per EN 13501-1 Class A as per ASTM E1264 (tested according to ASTM E84)
Sound absorption	$\alpha_w = 0.95$ as per EN ISO 11654 and EN ISO 354 $NRC = 0.90$ as per ASTM C423 and ASTM E1264
Sound attenuation	$D_{n,f,w} = 28$ dB as per EN 717-1 and EN 10848 (19 mm thickness, according to test certificate)
Light reflectance	up to 88 %
Thermal conductivity	$\lambda = 0.040$ W/mK as per EN 12667
Humidity	up to 95 % RH
Permeability	PM1 (30 m ³ /hm ²) as per DIN 18177
Clean room classification	ISO-class 4 as per ISO 14644-1
Hygiene	anti-microbial treatment against bacteria and fungi
Scrubability	tested as per ASTM D2486 (modified)
Washability	tested as per ASTM D4828 (modified)
Colour	white similar to RAL 9010

Sealed edges ✓

System G Exposed Grid System, demountable ceiling


Sound absorption data

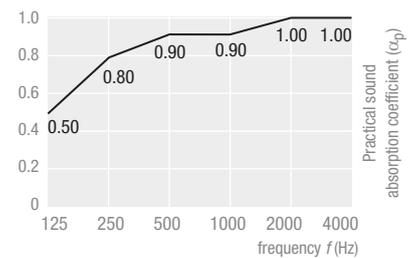

Available dimensions, edge details	Thickness / Weight 19 mm (c. 3,0 kg/m ²)			
	SK	VT-S 15/24	VT-S 15F	VT 15/24 (on request)
Please note minimum quantities and delivery times.				
600 x 600	✓	✓	✓	✓
600 x 1200	✓	✓	✓	✓

THERMATEX® dB Alpha Medical

THERMATEX® dB Alpha Medical is a mineral ceiling tile providing high sound absorption. The light weight and perforations of the core board create a Class A sound absorber. With a strong white surface the appearance of THERMATEX® dB Alpha Medical is smooth and elegant. New generation biosoluble mineral wool, clay and starch, contribute to the excellent acoustic performance.

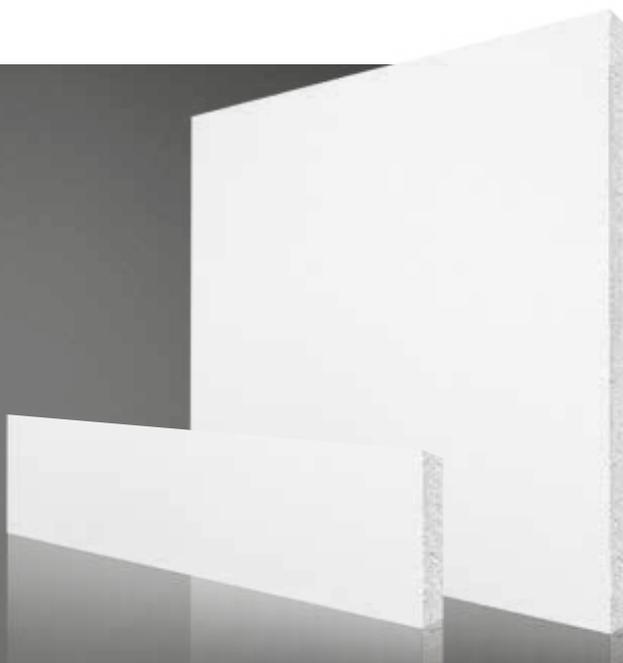


Technical performance

Building material class	A2-s1, d0 as per EN 13501-1 Class A as per ASTM E1264 (tested according to ASTM E84)
Sound absorption	$NRC = 0.80$ as per ASTM C423 and ASTM E1264
Sound attenuation	$D_{n,f,w} = 38$ dB as per EN 717-1 and EN 10848 $CAC = 40$ dB as per ASTM E413-1 and ASTM E1264 (22 mm thickness, according to test certificate)
Light reflectance	up to 88 %
Thermal conductivity	$\lambda = 0,040$ W/mK as per EN 12667
Humidity	up to 95 % RH
Permeability	PM1 (30 m ³ /hm ²) as per DIN 18177
Hygiene	anti-microbial treatment against bacteria and fungi
Scrubability	tested as per ASTM D2486 (modified)
Washability	tested as per ASTM D4828 (modified)
Colour	white similar to RAL 9010

Sealed edges ✓

System G Exposed Grid System, demountable ceiling

Sound absorption data

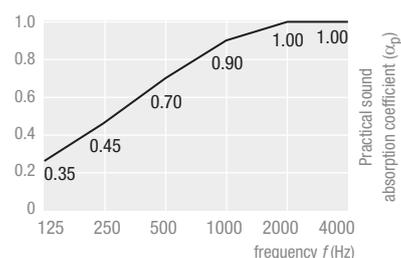

Available dimensions, edge details	Thickness / Weight 22 mm (c. 5,5 kg/m ²)			
	SK	VT-S 15/24	VT-S 15F	VT 15/24 (on request)
Please note minimum quantities and delivery times.				
600 x 600	✓	✓	✓	✓
600 x 1200	✓	✓	✓	✓



THERMATEX[®] Acoustic Medical

THERMATEX[®] Acoustic Medical is a 19 mm thick ceiling tile made from a special perforated mineral board with an acoustic fleece facing. The combination of high density, bio-soluble mineral wool with clay and starch provides excellent physical characteristics, particularly for acoustic performance.




Technical performance

Building material class	A2-s1, d0 as per EN 13501-1
Sound absorption	Class A as per ASTM E1264 (tested according to ASTM E84) $\alpha_w = 0.65$ (H) as per EN ISO 11654 and EN ISO 354 $NRC = 0.70$ as per ASTM C423 and ASTM E1264
Sound attenuation	$D_{n,c,w} = 38$ dB as per EN 717-1 and EN 20140-9 (19 mm thickness, according to test certificate)
Light reflectance	up to 88 %
Thermal conductivity	$\lambda = 0.052 - 0.057$ W/mK as per DIN 52612
Humidity	up to 95% RH
Permeability	PM1 (30 m ³ /hm ²) as per DIN 18177
Clean room classification	ISO-class 4 as per ISO 14644-1
Hygiene	anti-microbial treatment against bacteria and fungi
Scrubability	tested as per ASTM D2486 (modified)
Washability	tested as per ASTM D4828 (modified)
Colour	white similar to RAL 9010

Sealed edges ✓

System	<p>C Exposed Grid System, demountable ceiling</p> <p>F Free span system, with exposed or concealed suspension</p> <p>I Bandraaster system, with exposed or concealed suspension</p> <p>A Concealed system, panels demountable / not demountable</p>
---------------	---


Sound absorption data

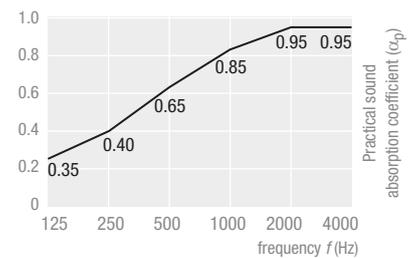

Available dimensions, edge details	Thickness / Weight 19 mm (c. 4,6 kg/m ²)			
	SK	VT 15/24	VT-S 15/24	AW/GN
Please note minimum quantities and delivery times.				
600 x 600	✓	✓	✓	✓
600 x 1200	✓	✓	✓	✓
plank sizes available on request	✓	✓	✓	✓

THERMATEX® dB Acoustic 24 Medical

THERMATEX® dB Acoustic Medical is the ideal solution for high sound attenuation requirements. Additionally good levels of sound absorption are achieved and the white unperforated surface creates an excellent appearance. The combination of high density, bio-soluble mineral wool with clay and starch provides excellent physical characteristics, particularly for acoustic performance.

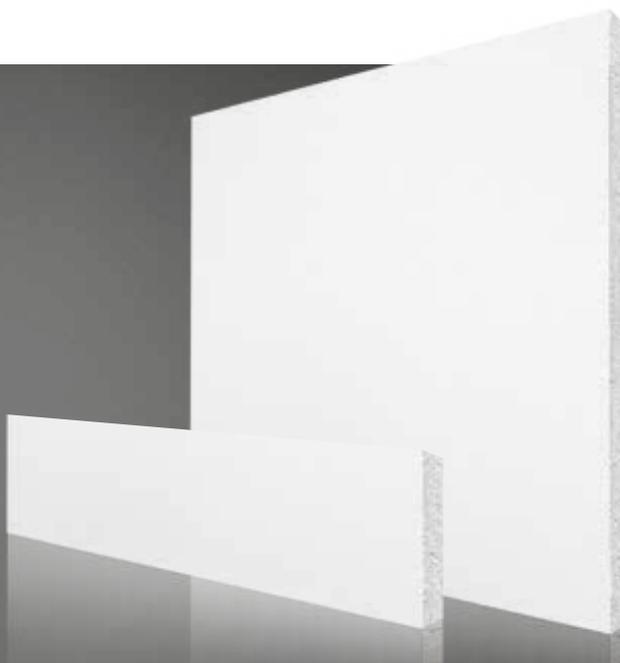


Technical performance

Building material class	A2-s1, d0 as per EN 13501-1
Sound absorption	Class A as per ASTM E1264 (tested according to ASTM E84) $\alpha_w = 0.65$ (H) as per EN ISO 11654 and EN ISO 354 $NRC = 0.70$ as per ASTM C423 and ASTM E1264
Sound attenuation	$D_{n,c,w} = 41$ dB as per EN 717-1 and EN 20140-9 $CAC = 42$ dB as per ASTM E413-1 and ASTM E1264 (24 mm thickness, according to test certificate)
Light reflectance	up to 88 %
Thermal conductivity	$\lambda = 0.052 - 0.057$ W/mK as per DIN 52612
Humidity	up to 95% RH
Permeability	PM1 (30 m ³ /hm ²) as per DIN 18177
Hygiene	anti-microbial treatment against bacteria and fungi
Scrubability	tested as per ASTM D2486 (modified)
Washability	tested as per ASTM D4828 (modified)
Colour	white similar to RAL 9010


Sealed edges ✓

System	<p>C Exposed Grid System, demountable ceiling</p> <p>F Free span system, with exposed or concealed suspension</p> <p>I Bandraaster system, with exposed or concealed suspension</p>
---------------	--

Sound absorption data

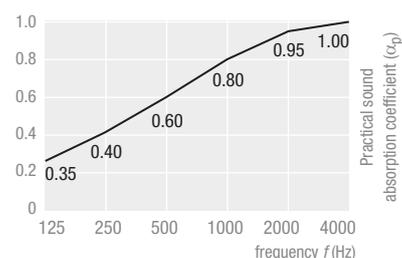

Available dimensions, edge details	Thickness / Weight 24 mm (c. 8,4 kg/m ²)				
	SK	VT 15/24	VT-S 15/24	AW/SK	GN/SK
Please note minimum quantities and delivery times.					
600 x 600	✓	✓	✓	-	-
600 x 1200	✓	✓	✓	-	-
plank sizes available on request	-	-	-	✓	✓

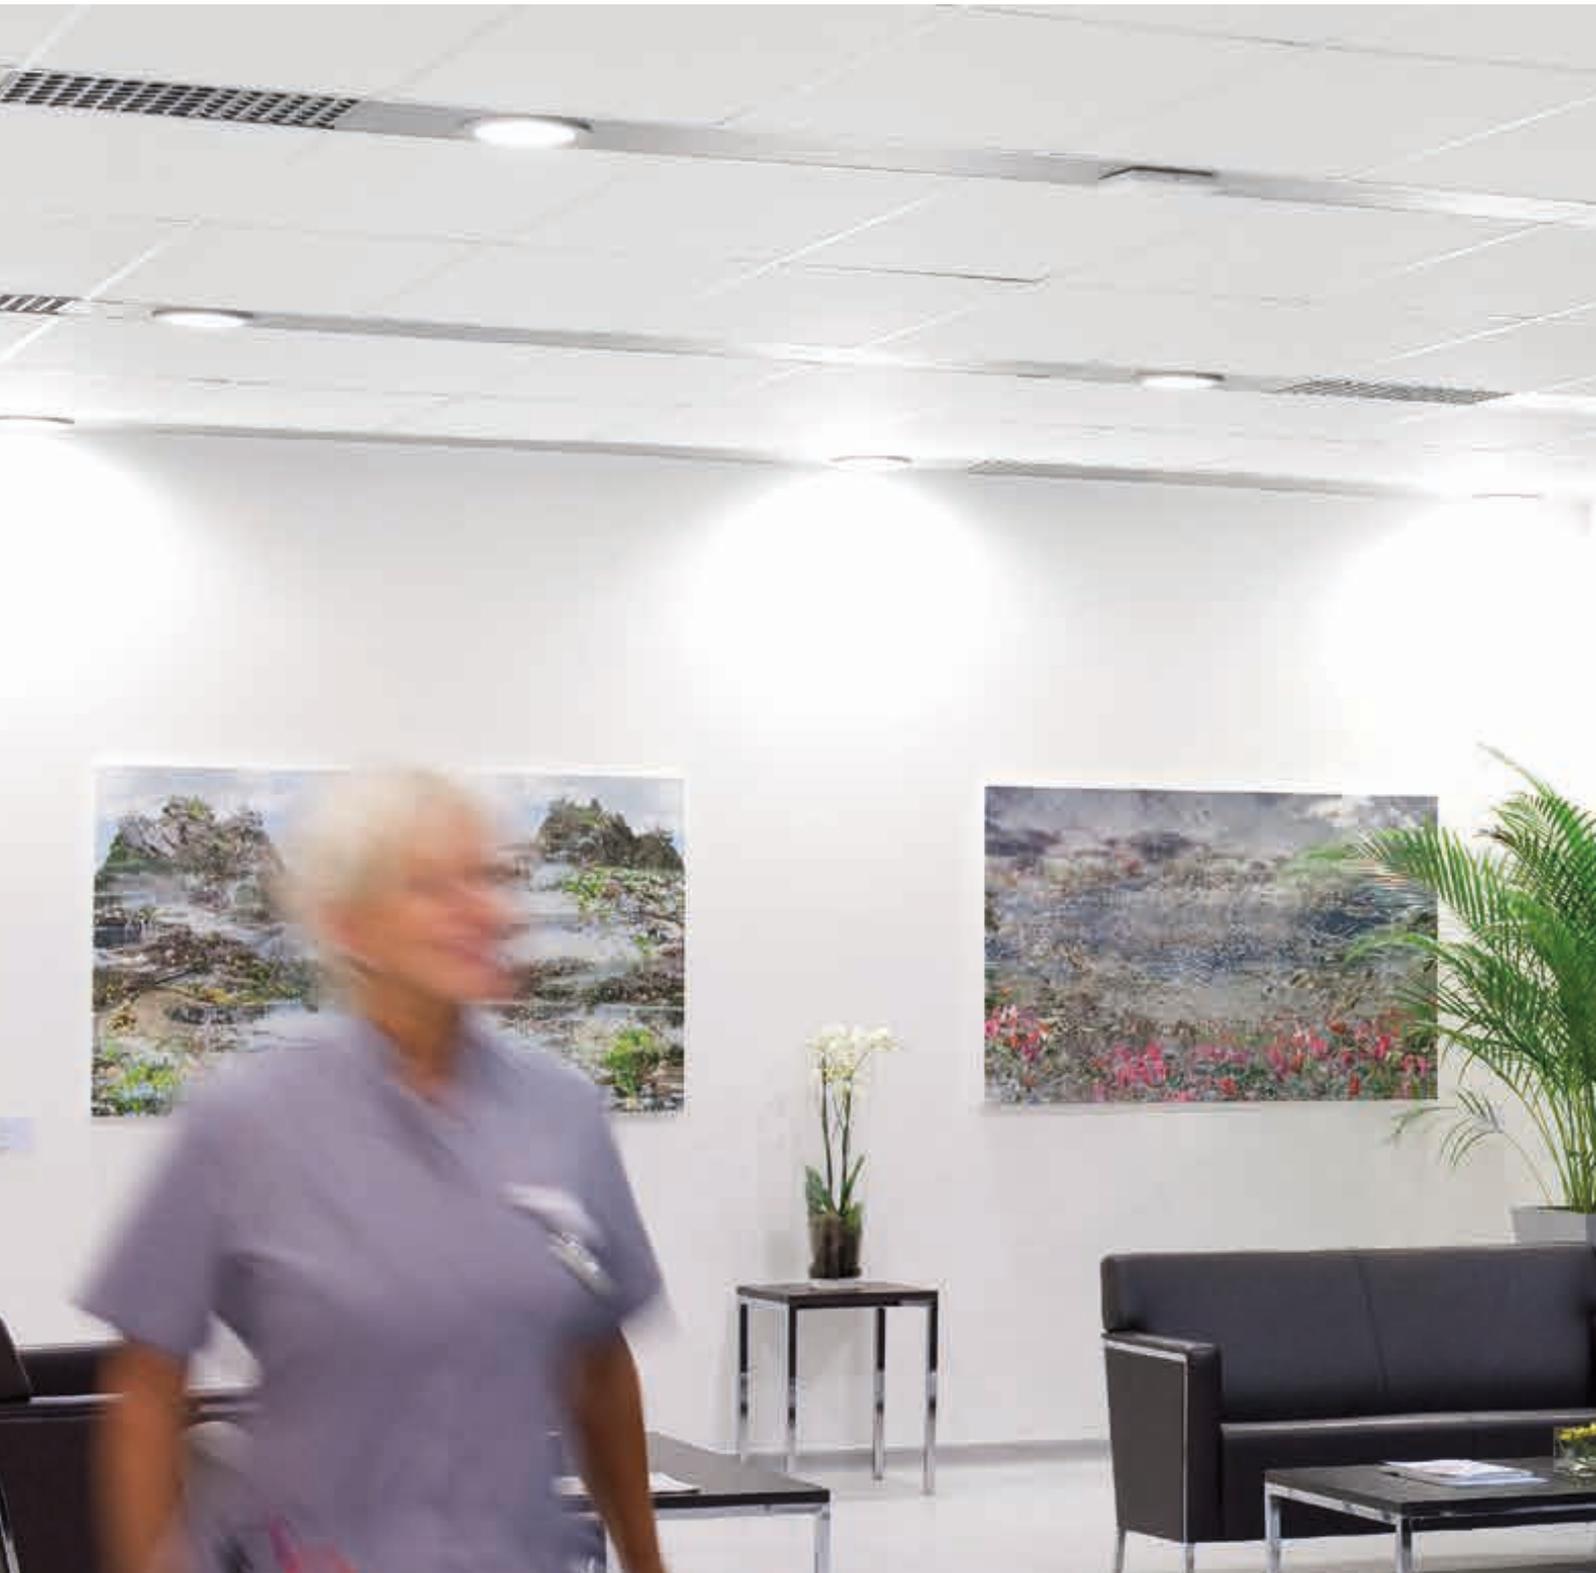




Legal note

Due to reproduction processes colours shown in this catalogue may differ from the actual product colour. Product selection should always be made from original AMF samples. All details and technical information stated in this brochure or other publicity material referring to AMF ceiling systems are based on test reports obtained under laboratory conditions. It is the responsibility of the client to see that such details and information are suitable for the particular application. All system details conform to current technology. All system relevant test certificates, assessments and installation guidelines are to be followed and are based on the exclusive use and compatibility of AMF products and system components used in both internal and external tests. AMF accepts no liability or responsibility for use of third party components or for any variations to conditions stipulated in test data. We recommend not mixing production batches on jobs. All technical data is subject to change without prior notice and is governed by AMF Terms and Conditions of Sale.

The most current technical and product information is available on our website www.amf-grafenu.de.
This catalogue supersedes all previous editions.
Errors and omissions excepted.
Printing errors excepted.

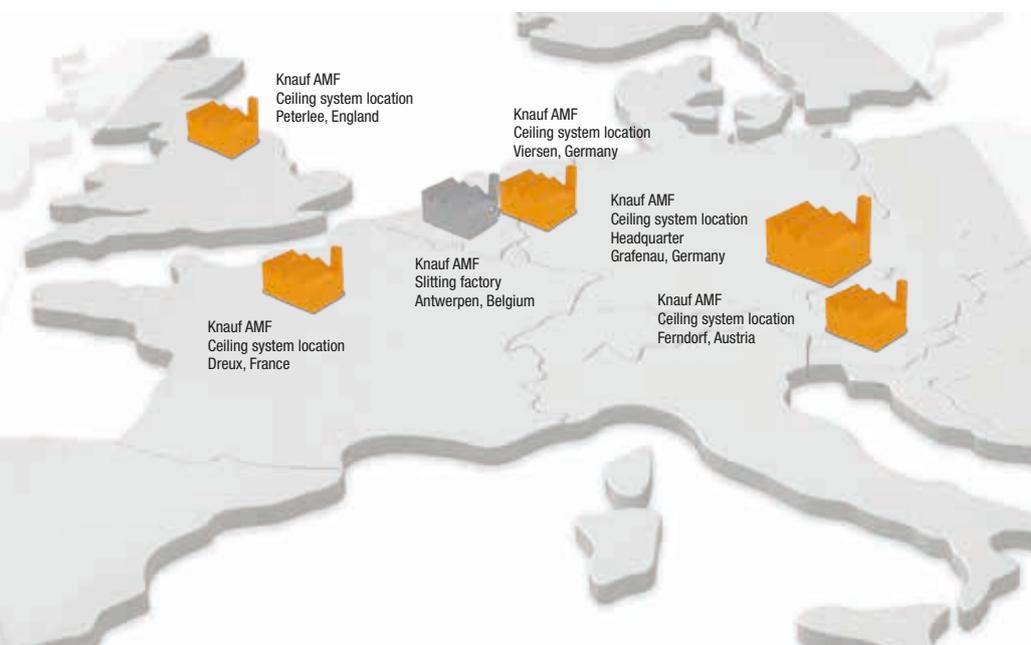

Knauf AMF GmbH & Co. KG
Elsenthal 15, 94481 Grafenau
Germany

Tel.: +49 8552 422-0
Fax: +49 8552 422-30

info@knaufamf.de
www.amf-grafenau.de
www.amf-medical.com

HERADESIGN® –
Knauf AMF Deckensysteme GmbH
9702 Ferndorf 29
Austria
Tel.: +43 4245 2001-0003
office@heradesign.com
www.heradesign.com

Knauf AMF GmbH & Co. KG
Metallstraße 1, 41751 Viersen
Germany
Tel.: +49 2162 957-0
info-de@knaufamf.eu

Knauf AMF Plafonds et Systèmes
9, rue des Livraindières, 28100 Dreux
France
Tel.: +33 237 3850-50
info@knaufamf.fr

Knauf AMF Ceilings Ltd.
1 Swan Road, Peterlee, Co. Durham
England
Tel.: +44 191 5188600
sales@amfceilings.co.uk

AMF THERMATEX® AMF VENTATEC® Heradesign®

With the strong brands AMF THERMATEX®, AMF VENTATEC® and HERADESIGN®, the ceiling specialist Knauf AMF offer a fully developed product range and exceptional sales and advisory services to architects, specialist contractors, developers and distributors throughout the world.

With us, you are always a ceiling solution ahead!

No responsibility or liability is accepted for the accuracy of the information provided.
Subject to change without prior notice.

09/2014