



## SafeScape® T5000

Fire Rating

180 minutes

Max Width

24 metres

Max Height


UNLIMITED

# SafeSpace® T5000 Series



This fire and smoke rated door assembly is designed to coil at the top allowing the rigid button frame with fixed egress doors to lower when deployed. Once in place, the single or multiple swinging egress doors provide complying egress.

Large occupant loads and wide-span openings are easily accommodated by the McKeon T5000. T5000 Series fire door systems are a design advantage when there is no side room available for pocket storage.

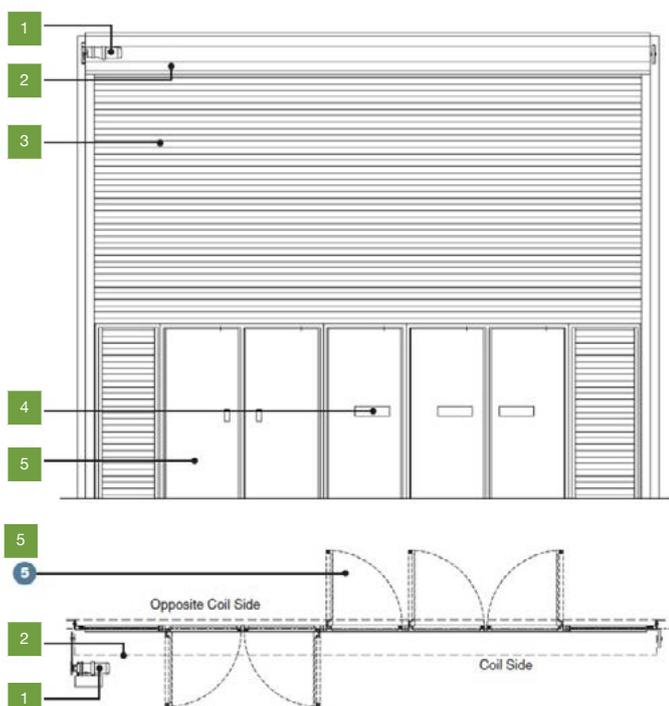

- 1 Fire Door Motor Operator
- 2 Hood
- 3 Curtain Slats
- 4 Fire Exit Hardware
- 5 Swinging Egress Doors

### Ratings

3-hour rated to UL 10B  
 90-minute rated assembly with a 340°C over 30 minute Temperature Rise rating when required  
 Smoke & Draft labeled UL 1784

### Egress

Available with up to 18 complying egress swing doors. Doors are operable and connected to the bottom of the rolling steel.

Egress doors only swing in one direction.  
 Maximum swing door width is 1220mm

### Finishes

McKeon Sterling Gray  
 Powdercoated to RAL colour  
 Stainless steel

Model	Open	Self-Close	Egress
T5000	Auto-Set® Operator	Fail-Safe Mechanical	1 Complying Swing Door
T5002 - T5018 <sup>1</sup>	Auto-Set® Operator	Fail-Safe Mechanical	2 to 18 Complying Swing Doors

<sup>1</sup> The last two digits of the model number indicate the number of swing doors.

### Benefits

- Only a small amount of side pocket space required
- Up to 18 conventional swing egress doors
- Accommodate large occupant exit load width requirements
- No need to build by-pass doors or fixed construction to house the fire doors, these can be operable on fire alarm activation

### Operation

Auto-Set® automatic resetting  
 Fail-Safe Design - automatic self-closing mechanism does not require power operation

