

Palida Midi

Flood Light



60W



80W / 100W

Product Information

With six special beam profiles and uniform photometric distribution, this LED lighting series is perfectly suitable for indoor/outdoor lighting applications such as sports fields, playgrounds or parks.



Lumen Output	7200lm	9600lm	12,000lm	14,000lm
Module Power	60W	80W	100W	120W
System Power	66W	90W	110W	135W
LED Chip Manufacturer	Lumileds / Osram			
Driver Input Voltage	240V AC			
Driver Manufacturer	Meanwell			
Dimming Options	1 - 10V input / DALI / non-dimmable			
Mounting Options	Surface / Pole Mounted			
Fitting Colour	Black			
Tilting Angle Range	0° - 160°			
IP Rating	65			

Photometric Information



CRI	>70Ra
Colour Temperature (CCT)	3000K / 4000K / 5000K / 6000K / 7000K
Beam Angle Options	15° / 30° / 40° / 60° / 90° / 60°x135° / 85°x45° / 85°x90° / 85°x135°



60W

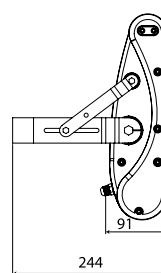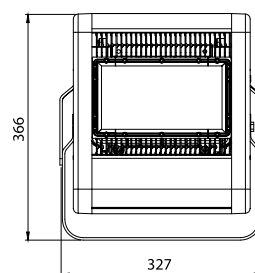

80W / 100W / 120W

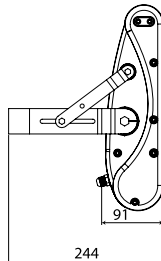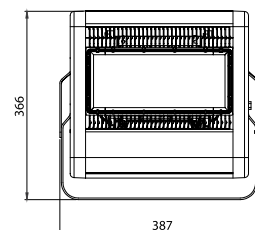

(dimensions in mm)

Palida Midi

Flood Light



150W / 200W



250W

Product Information

With six special beam profiles and uniform photometric distribution, this LED lighting series is perfectly suitable for indoor/outdoor lighting applications such as sports fields, playgrounds or parks.



Lumen Output	18,000lm	24,000lm	30,000lm
Module Power	150W	200W	250W
System Power	170W	220W	275W
LED Chip Manufacturer	Lumileds / Osram		
Driver Input Voltage	240V AC		
Driver Manufacturer	Meanwell		
Dimming Options	1 - 10V input / DALI / non-dimmable		
Mounting Options	Surface / Pole Mounted		
Fitting Colour	Black		
Tilting Angle Range	0° - 160°		
IP Rating	65		

Photometric Information



CRI	>70Ra
Colour Temperature (CCT)	3000K / 4000K / 5000K / 6000K / 7000K
Beam Angle Options	15° / 30° / 40° / 60° / 90° / 60°x135° / 85°x45° / 85°x90° / 85°x135°



150W / 200W / 250W

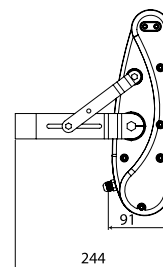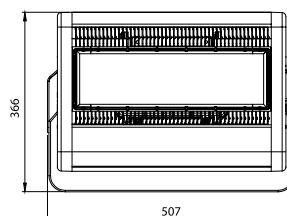

250W

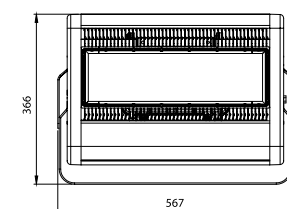

(dimensions in mm)

Palida Midi

Flood Light



300W / 3500W / 400W



500W / 600W

Product Information

With six special beam profiles and uniform photometric distribution, this LED lighting series is perfectly suitable for indoor/outdoor lighting applications such as sports fields, playgrounds or parks.


Lumen Output	36,000lm	42,000lm	48,000lm	60,000lm	70,500lm
Module Power	300W	350W	400W	500W	600W
System Power	3300W	390W	440W	550W	660W
LED Chip Manufacturer	Lumileds / Osram				
Driver Input Voltage	240V AC				
Driver Manufacturer	Meanwell				
Dimming Options	1 - 10V input / DALI / non-dimmable				
Mounting Options	Surface / Pole Mounted				
Fitting Colour	Black				
Tilting Angle Range	0° - 160°				
IP Rating	65				

Photometric Information


CRI	>70Ra
Colour Temperature (CCT)	3000K / 4000K / 5000K / 6000K / 7000K
Beam Angle Options	15° / 30° / 40° / 60° / 90° / 60°x135° / 85°x45° / 85°x90° / 85°x135°




300W / 350W

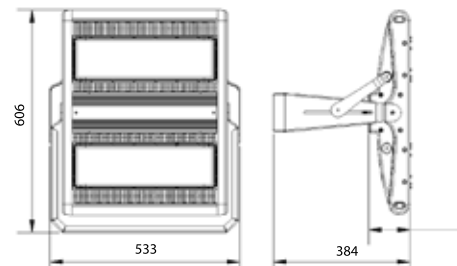

400W

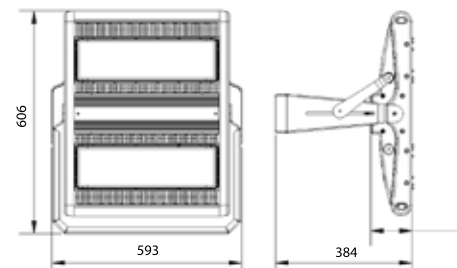

500W / 600W

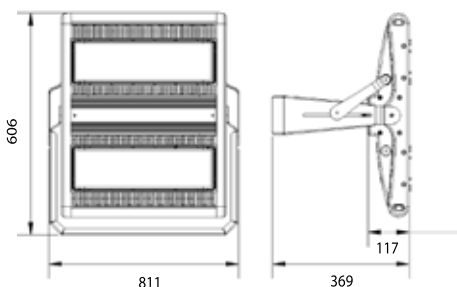

(dimensions in mm)