

# DECORZEN

ACOUSTIC  
PANELS

SOUND  
PROFILE

NRC 0.70  
-0.80



CONTENTS	
DecorZen in Use	02
Profile Options	05
Finishes	06
Substrates	09
Recommended Fixing Method	09
Compliance	10
Build Your Specification	11

DecorZen brings acoustic elegance to any sized space. This calming contemporary design uses colour and form to create a canvas for alluring architectural design.

Absorbing up to 88% of incidental noise, the panels bring a sense of serenity and tranquillity to bustling environments.



BRISBANE GIRLS GRAMMAR SCHOOL  
WILSON ARCHITECTS



NARROGIN HEALTH SERVICE  
SILVER THOMAS HANLEY





OUR LADY OF THE ASSUMPTION CATHOLIC PRIMARY SCHOOL  
BVN



MYOB HEAD QUARTERS  
CACHET GROUP




CORPUS CHRISTI COLLEGE THEATRE  
EIW ARCHITECTS

# DECORZEN OPTIONS


SOUND  
PROFILE

NRC 0.70  
-0.80


## 01— PROFILE

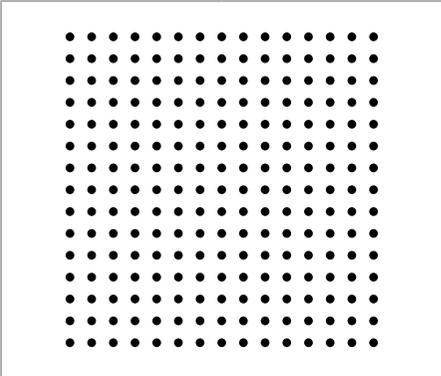


AP125S\_\_ HOLE DIAMETER  
OPTIONS - 5, 6, 7MM

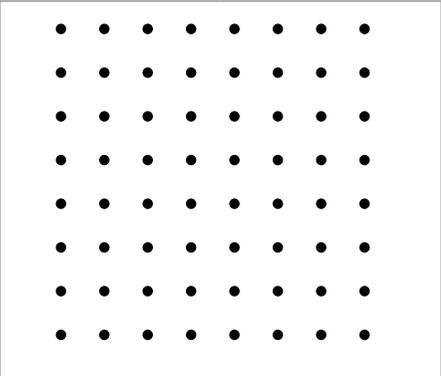


AP250S\_\_ HOLE DIAMETER  
OPTIONS - 6, 8,  
10, 12MM

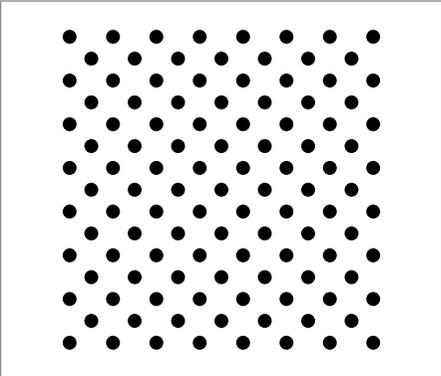


AP250D\_\_ HOLE DIAMETER  
OPTIONS - 6, 8,  
10MM

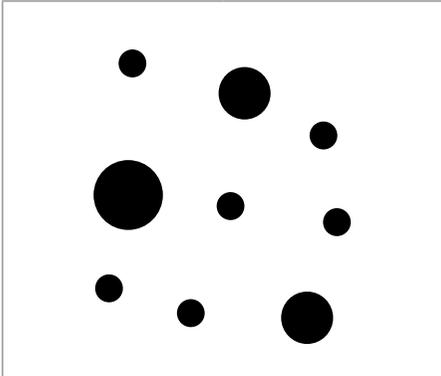


8/15/20R

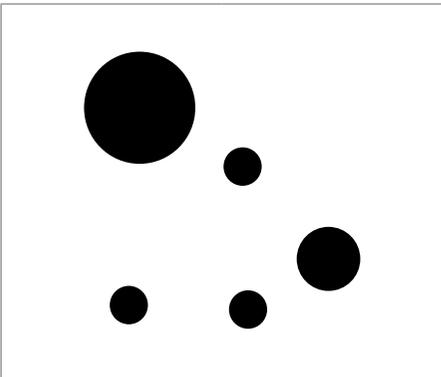


12/20/35R

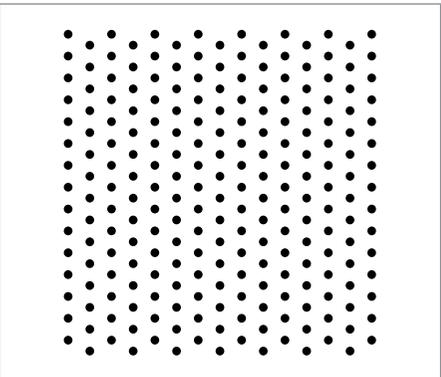

AP125AXX\_\_ HOLE DIAMETER  
OPTIONS - 6MM

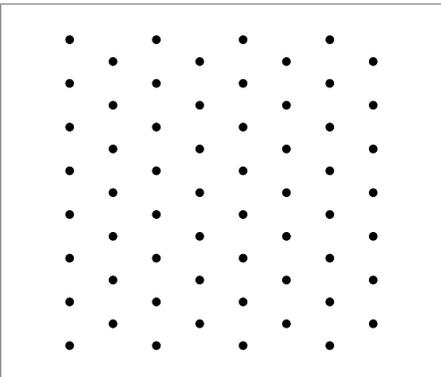

AP250AXX\_\_ HOLE DIAMETER  
OPTIONS - 6, 8,  
10MM

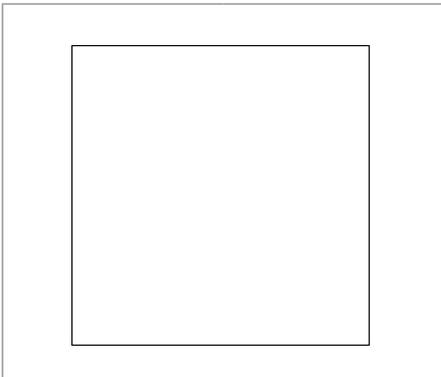

SOLID

## 02— FINISHES

We have a large range of finishes available for DecorZen and we are constantly optimising the range by adding and removing options. Please visit the finishes section on our website for the most up to date collection.

FSC® options are available upon request.

[View Finishes Online](#)

## 03— SUBSTRATES



01 FIRE RATED  
MDF



02 MOISTURE  
RESISTANT MDF



03 FSC® MDF



04 FIRE GUARD  
GREY CORE



05 BLACK CORE  
MDF




06 FIRE RATED BLACK  
CORE MDF




07 PLYWOOD


## 04— RECOMMENDED FIXING METHOD




Wall  
Concealed BJ2




Wall  
Concealed DSB




Wall  
Visible - Face Fixed/ Direct Fix




Wall  
Stektek




Ceiling  
Concealed DSB



Ceiling  
Visible - Face Fixed/ Direct Fix



Ceiling  
Ceiling Grid - Drop-in Tile



Ceiling  
Stektek

View the installation guidelines for each fixing system on online: [decorystems.com.au](https://www.decorystems.com.au)

# 05— COMPLIANCE



**Fire Rating**      GROUP 1, 2 OR 3  
**– Natural Timber Veneer**



**Fire Rating**      GROUP 1, 2 OR 3  
**– SmartLook**



**Acoustic Rating**      0.70 – 0.80



**Environmental Accreditation**      GECA FSC®



**Social Responsibility**      AUSTRALIAN TRUSTED TRADER

[View Certificates Online](#)

\*Environmental accreditations may vary depending on the exact specification.

# DECORZEN -BUILD YOUR SPECIFICATION

Complete the table and use the details in your project specification.

PRODUCT	DECORZEN	SUPPLIER	DECOR SYSTEMS - PH: 1800 835 035	
PROFILE	(CHOOSE A PROFILE FROM THE LIST ABOVE)			
FINISH	(CHOOSE A FINISH FROM THE LIST ABOVE)			
FINISH VARIATION	(E.G. AMERICAN OAK)			
SUBSTRATE	(CHOOSE A SUBSTRATE FROM THE LIST ABOVE)			
THICKNESS	12MM (STANDARD)	16MM (SUITED FOR SPORTS FACILITIES)		
FIXING METHOD	(CHOOSE A FIXING METHOD FROM THE LIST ABOVE)			
JOINT	EXPRESS (RECOMMENDED)	BUTT JOINT		
EDGING	MATCHING	BLACK	N/A	
BIOPANEL ZAP-X	YES	NO		
DECORINSUL	YES	NO		
FIRE CERTIFICATION	DECORZEN COMES WITH A GROUP 2 FIRE RATING. IN SOME CASE, IT CAN ACHIEVE A GROUP 1 CERTIFICATION WHEN A SPECIFIC COMBINATION OF SUBSTRATE AND FINISH IS USED. PLEASE DISCUSS THIS WITH YOUR DECOR SYSTEMS PROJECT CONSULTANT.			
NOTES	(ANY EXTRA INFORMATION YOU WOULD LIKE TO ADD?)			
<p>This product requires an air gap and DecorInsul behind the panels for the best acoustic performance. Consult the acoustic test results, and opinion of project acoustic engineer for more details. If not available due to site constraints or budget, a 50mm gap with DecorInsul works in most cases.</p> <p>Close collaboration between Decor Systems, the project architect and the client has taken place to develop this specification. DecorZen cannot be substituted unless agreed by Architect and Acoustic Engineer.</p> <p>Panels should be allowed to acclimatise on site for at least five days before installation. Decor Systems certificate # (Contact your Decor Systems project consultant for your individual project number) to be supplied upon completion. Panel installation to be as per manufacturer's instructions and AS/NZS 2785. - Installation to be done by an approved ceiling and partition contractor. Product guarantee to be 99 years as per Decor Systems guarantee. Please contact Decor Systems for your project specific completion number.</p>				

# GET IN TOUCH