



For use with

ACO Drain KS100 / H100KS System



Product Features

- Tool-free installation.
- Encapsulated LED emitting a soft, diffuse light. Available in blue, cool white and soft white.
- Each transformer can power up to 30 LED lights.
- Connection to power supply (240V) through a low voltage transformer.
- Suitable for KS100 / H100KS channels.

Compliance


1. Light fittings comply with **AS/NZS CISPR15**: The Australian and New Zealand standard for EMC and radio disturbance characteristics of electrical lighting products.
2. All electrical components are rated to **IP67 AS 60529**: Degrees of protection by enclosures.
3. **Heelguard Antislip™** stainless steel grate rated to R10 – **AS/NZS 4586**: Slip resistance classification of surface materials.



LED fitting



Supply unit

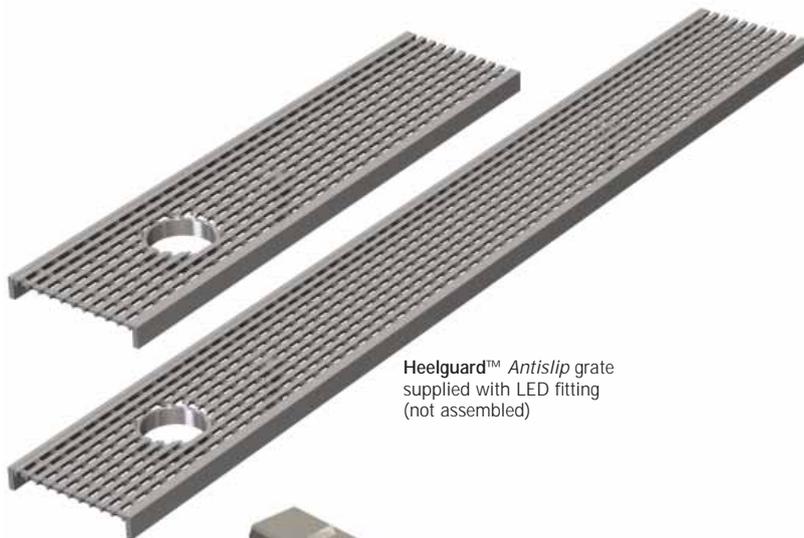

Heelguard™ Antislip grate supplied with LED fitting (not assembled)



QuickLok locking bar



Interconnecting extension lead – 1m (optional)



Interconnecting extension lead – 3m (optional)



Termination plug

For use with ACO Drain KS100 / H100KS System
(refer to www.acoaus.com.au/drain for installation guidelines)

	Part No.	Description
 <p>KS100</p>	45012725	Type 447QLP Heelguard™ Antislip – Warm White
	45012726	Type 447QLP Heelguard™ Antislip – Cool White
	45012721	Type 447QLP Heelguard™ Antislip – Blue
 <p>H100KS</p>	45012735	Type 448QLP Heelguard™ Antislip – Warm White
	45012736	Type 448QLP Heelguard™ Antislip – Cool White
	45012731	Type 448QLP Heelguard™ Antislip – Blue
<p>Auxiliary Items</p>	02899	QuickLok bar
	45012703	Supply unit 24V DC 100VA Transformer ^(1, 2)
	45012706	Interconnecting extension lead – 1m ^(2, 3)
	45012705	Interconnecting extension lead – 3m ^(2, 3)
	45012707	Termination plug

- (1) Both 240V DC input and 24V DC output leads are 2m long.
- (2) Connection and termination plugs can be pulled through conduit sizes DN20 or larger if conduits are required.
- (3) Optional interconnecting leads can be used to increase distance between supply unit and first LED fitting if required.

ACO Polycrete Pty Ltd
ABN 65 050 102 942
www.acoaus.com.au

Sales Hotlines
Australia 1300 765 226
New Zealand 0800 448 080
Export +61 2 4747 4000

New South Wales
134-140 Old Bathurst Rd
Emu Plains NSW 2750
aconsw@acoaus.com.au

Queensland
467 Tufnell Road
Banyo QLD 4014
acoqld@acoaus.com.au

Victoria & Tasmania
9 Overseas Drive
Noble Park VIC 3174
acovic@acoaus.com.au

Western Australia
33-35 Sorbonne Cres
Canning Vale WA 6155
acowa@acoaus.com.au

South Australia
acosa@acoaus.com.au
Northern Territory
acont@acoaus.com.au

Technical Support
email technical@acoaus.com.au