



**KINGFLOR**<sup>®</sup>


COMPOSITE STEEL FORMWORK RANGE




## COMPOSITE STEEL FORMWORK SOLUTIONS FOR CONCRETE & STEEL FRAME BUILDINGS

Each of the five profiles in Fielders KingFlor® steel decking range have been developed to provide the most optimal flooring solution in the wide range of building construction types found in Australia.

KingFlor® steel decking provides the designer the ability to tailor a flooring solution whilst accessing the inherent benefits of steel decking over labour and material intensive ply timber and lost formwork alternatives. KingFlor® is manufactured from DECKFORM® steel by BlueScope Steel.



**KF40® An economical profile for real savings!** *A unique alternative to ply formwork providing concrete savings up to 40kg/m<sup>2</sup>.*




**KF57® Installation made easy!** *Provides unrivaled performance in fire rated slab applications.*



**KF70® Larger spans for greater savings!** *Provides for longer unpropped spans and concrete savings due to the high performance trapezoidal profile.*





**RF55® A strong and reliable solution!** *The industry leader in both concrete and steel frame construction.*



**SlimDek 210™ Long spans with lower floor construction depths!** *SlimFlor® utilises Fielders SlimDek 210™ flooring profile in conjunction with asymmetric steel beam sections (ASB) to provide a long spanning, cost effective integrated steel flooring system.\**

\*Also available in CF210 configuration, the original deep deck, for a variety of design arrangements.

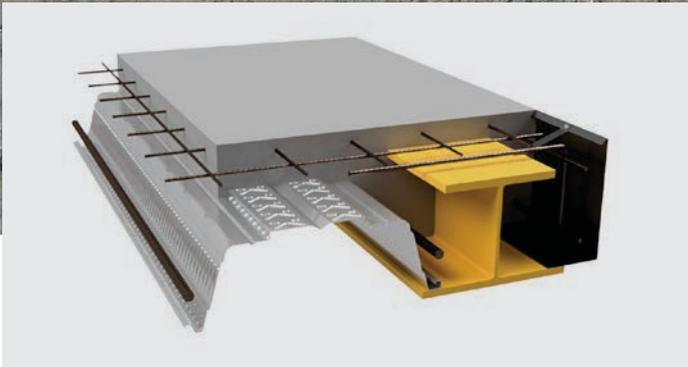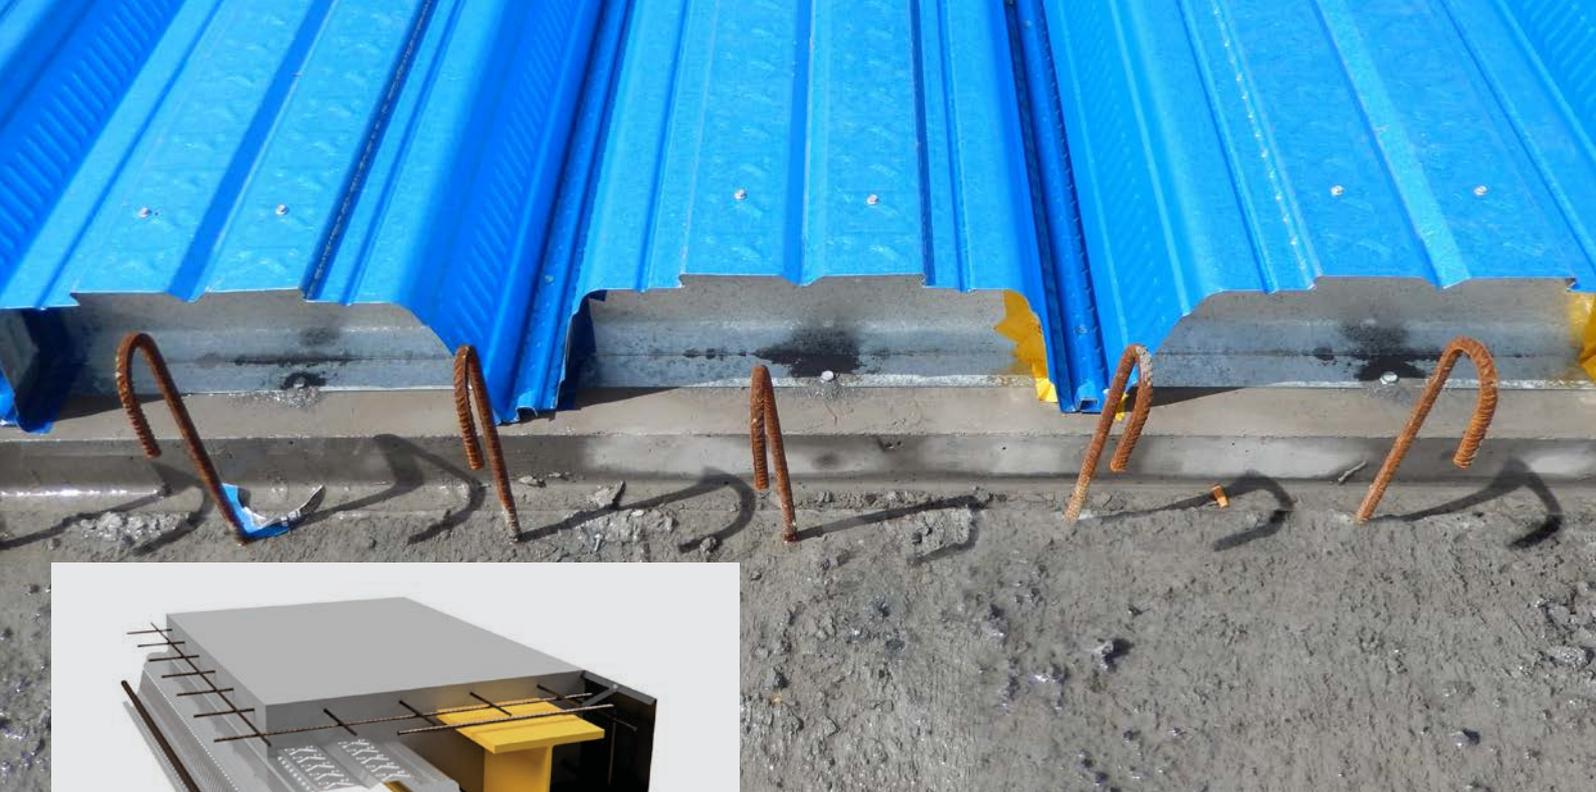

# SLIMFLOR<sup>®</sup>

INTEGRATED STEEL FLOORING SYSTEM

SlimFlor<sup>®</sup> utilises Fielders' SlimDek 210<sup>™</sup> flooring profile in conjunction with asymmetric steel beam sections (ASB) to provide a long spanning, cost effective integrated steel flooring system. The SlimDek 210<sup>™</sup> profile and ASB steel sections are constructed in plane with the steel decking supported on the bottom flange of the steel beam providing a floor depth construction zone much less than conventional down-stand beam construction. The deep ribs of the SlimDek 210<sup>™</sup> decking provide a zone for the running of services.

- > **REDUCED FLOOR CONSTRUCTION DEPTH**
- > **LONG SPANNING SLIMDEK 210<sup>™</sup> DECKING**
- > **INCREASED SPEED OF CONSTRUCTION**



Whilst the SlimFlor<sup>®</sup> system has a minimum construction depth of 280mm it has the equivalent weight of a 120mm concrete slab. The SlimDek 210<sup>™</sup> provide displaces the equivalent of 170mm of concrete from the slab profile.



## SLIMDEK 210™ LONG SPANS AND LOWER FLOOR DEPTHS

Fielders SlimDek 210™ is a long spanning decking profile capable of achieving unprecedented unpropped spans during construction of up to 7.0m and propped spans of over 10.0m. When combined with Fielders SlimFlor® construction system, floor construction depth can be reduced to as little as 280mm.

- Unique profile: Concrete savings of up to 60% when compared to alternative formwork products.
- Large unpropped spans: Less propping congestion and easy access to the underside of the slab.
- Use of patented ReLok™ system to maximise composite action.
- SlimFlor® construction: Floor system depths as low as 280mm.
- Concrete savings: SlimDek 210™ effectively saves up to 170mm off the overall slab depth when compared to conventional concrete slabs. This represents significant savings in concrete costs, supporting framework and foundation loads.
- Creates fire and acoustic floor system solutions.

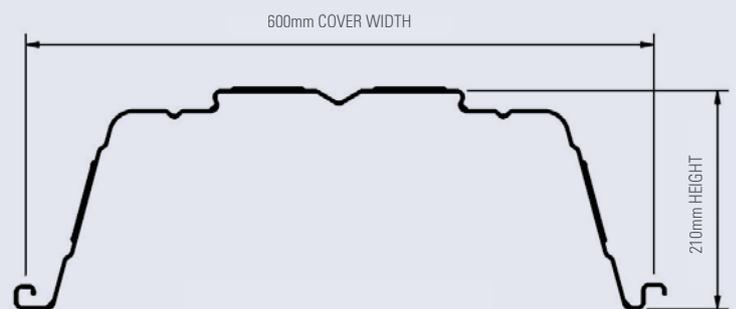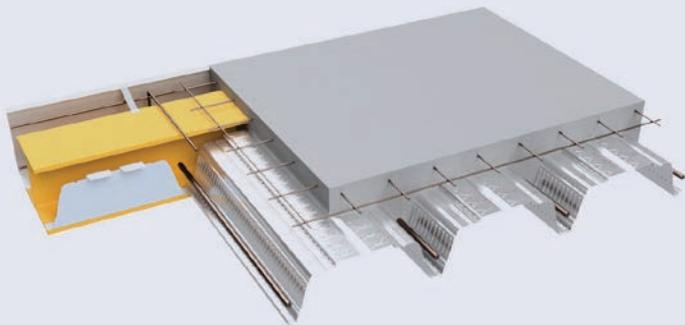

KingFlor® SlimDek 210™ decking is manufactured as standard from either G550 (550MPa Yield Strength) 1.0mm Base Metal Thickness (BMT), G500 1.2mm BMT or G500 1.5mm steel. The galvanised coating thickness for all three is Z350 (minimum 350g/m<sup>2</sup>) in accordance with AS 1397-2011.

Material Properties	1.0mm BMT	1.2mm BMT	1.5mm BMT
Mass Area – Average mass of fitted deck per plan area (kg/m <sup>2</sup> )	13.61	16.34	20.24
Mass Linear – Mass of individual length (kg/m)	8.16	9.8	12.25
Zinc Coating (g/m <sup>2</sup> ) (Z350)	350	350	350
Yield Strength (MPa)	550	500	450



## SLIMDEK 210™ IN THE MARKET - UNILODGE, GRAY ST, ADELAIDE

### PROJECT SPECIFICS:

20,000m<sup>2</sup> of KingFlor®  
SlimDek 210™

### MATERIALS:

KingFlor® SlimDek 210™

### SYSTEM:

Fielders SlimDek 210™  
SlimFlor® system

**BUILDER:** Synergy Construct

### THE PROJECT

Unilodge is purpose built student accommodation situated in the western heart of Adelaide's CBD. It is a 17 floor structure; consisting of 16 floors of rooms and a roof deck, offering boutique accommodation for 772 students.

### THE SOLUTION

Using SlimFlor® system incorporating SlimDek 210™ 1.2mm and 1.5mm sections were used to achieve spans of 6 and 7m respectively. This allowed for elimination of propping costs and reduced construction times.

### THE PROCESS


Faced with a challenging construction schedule Fielders worked with the design team to incorporate ASB (UC) steel beams with SlimDek 210™ to create lower profile floor zones and reduce the construction schedule.



## KF40® ECONOMICAL PROFILE FOR REAL SAVINGS!

Fielders KF40® is a revolutionary steel formwork solution suitable for concrete slabs in all types of construction. KF40® combines the performance of a traditional flat pan profile with the unmatched economy and concrete saving of a trapezoidal deck.

- SquashCut™ ends: No end caps needed. Also provides rigid and secure platform during construction.
- Unique off-set lap: Enables shear studs to be placed centrally in the pan in the most optimal position.
- Unique profile: Concrete savings up to 40kg/m<sup>2</sup> (16mm off slab depth).
- Lower 40mm height: Suitable for post-tensioning ducts.
- Wide 487mm or 742mm cover: Economical deck.
- Strong re-entrant features: KF40® has been specifically designed to provide a strong and reliable shear bond performance giving strong composite slabs.

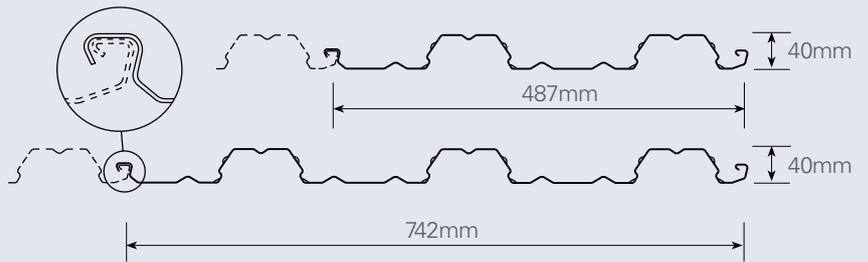

KF40® is manufactured from G550 (550 MPa Yield Stress) DECKFORM® steel in a 2 pan or 3 pan profile\* with a Base Metal Thickness (BMT) of 0.60mm, 0.75mm and 1.00mm. The galvanised coating thickness is a Z350 (350 g/m<sup>2</sup>) in accordance with AS 1397:2001.

Material Properties	0.60 BMT	0.75 BMT	1.00 BMT
Mass Area – Average mass of 2-PAN deck per plan area (kg/m <sup>2</sup> )	7.04	8.67	11.39
Mass Area – Average mass of 3-PAN deck per plan area (kg/m <sup>2</sup> )	6.78	8.35	10.97
Mass Linear – Mass of individual 2-PAN length (kg/m)	3.43	4.22	5.55
Mass Linear – Mass of individual 3-PAN length (kg/m)	5.03	6.19	8.14
Zinc Coating (g/m <sup>2</sup> ) (Z350)	350	350	350
Yield Strength (MPa)	550	550	550



## KF40® IN THE MARKET - V BY CROWN

### PROJECT SPECIFICS:

70,000m<sup>2</sup> of KingFlor® KF40®

### MATERIALS:

KingFlor® KF40®

### ARCHITECT:

Koichi Takada

Allen Jack + Cottier

### CONTRACTOR:

Crown International

### THE PROJECT

V by Crown is a world-class apartment tower recently constructed in Parramatta, NSW, offering sweeping views of the Sydney skyline and heritage parklands. The \$309m residential apartment building soars an impressive 29 storeys high and is superbly finished with a luxurious glazed mirrored exterior.

Fielders were contracted by Crown International and Allen Jack & Cottier Architects to provide multiple solutions including 70,000m<sup>2</sup> of KingFlor® KF40® steel framework for the new development.

### THE SOLUTION

KingFlor® KF40® was chosen for this project due to its trapezoidal shape saving the project 16mm of concrete across the entire project of 70,000m<sup>2</sup>. KF40®'s unique design with wider coverage will not only save on preparatory costs, it also allows for the floor laying to be executed faster.

### THE PROCESS

The supply of the KingFlor® KF40® decking profile commenced in January 2015. The development is scheduled to open in 2017.



## KF70® LARGER SPANS FOR GREATER SAVINGS!

Fielders KF70® is a market leading steel formwork solution for composite concrete slabs in concrete and steel-framed construction. It's the answer to increased market demand for a lightweight profile capable of large spans. The KF70® profile displaces 26mm of concrete from the total slab depth to achieve a lightweight slab.

- Significant saving in concrete costs, supporting framework and foundation loads.
- SquashCut™ ends: No end caps needed. Also provides rigid and secure platform during construction.
- Unique off-set lap: Enables shear studs to be placed centrally in the pan in the most optimal position.
- Large unpropped spans: Less propping congestion and easy access to the underside of the slab.
- Supplied pre-cut to length, with 600mm wide cover, means quick installation times.
- Dovetail rib provides a simple hanger solution: Economic and easy suspension of services from an insert in the dovetail rib.
- Strong re-entrant features: KF70® gives a strong and reliable shear bond performance making strong composite slabs.
- KF70® effectively saves 26mm of concrete off the overall slab depth by concrete volume when compared to conventional concrete slabs.



KF70® is manufactured from G550 (550 MPa Yield Stress) DECKFORM® steel with a Base Metal Thickness (BMT) of 0.75mm and 1.00mm. A thickness of 0.60mm BMT is also available upon request, subject to stock availability and order quantities. The galvanised coating thickness is a Z350 (350 g/m<sup>2</sup>) in accordance with AS 1397:2001.

Material Properties	0.75 BMT	1.00 BMT
Mass Area – Average mass of fitted deck per plan area (kg/m <sup>2</sup> )	8.97	11.78
Mass Linear – Mass of individual length (kg/m)	5.38	7.07
Zinc Coating (g/m <sup>2</sup> ) (Z350)	350	350
Yield Strength (MPa)	550	550



## KF70® IN THE MARKET - CROWN TOWERS PERTH

### PROJECT SPECIFICS:

20,000m<sup>2</sup> of KingFlor® KF70®  
1.00mm BMT G550 steel

### MATERIALS:

KingFlor® KF70®

### ARCHITECT:

YWS

### BUILDER:

Brookfield Multiplex

### CONTRACTOR:

Perth Rigging Company Pty Ltd

### THE PROJECT

Fielders worked in collaboration with architecture firm, YWS, and builder, Brookfield Multiplex, on the \$750m, 500 room expansion of the Crown Towers Perth, which saw the complex become the first 6-star hotel in Western Australia. Constructed from late 2014 until late 2016, Fielders were commissioned to supply the building with 20,000m<sup>2</sup> of KingFlor® KF70® steel formwork, which was used for its lightweight large span profiles.

The state-of-the-art development has been designed to transform the Crown Towers into a premium tourist destination to bring the hotel's total capacity to 1200 rooms, while also certifying it the largest hotel complex the city has ever seen.

### THE SOLUTION

Fielders KingFlor® KF70® was the solution of choice and specified by YWS architects for its cost efficient composite steel formwork system, due to its longer span, deeper profile and easy installation, in comparison to other existing formwork options.

### THE PROCESS


One of the major benefits of using Fielders Kingflor® KF70® was the ability to install the sheets in a small space restricted by scaffolding as well as the significant cost savings the profile offers. Due to restricted space to install, the contractors were able to lay the sheeting from the underside of the platform and then crimp the sheets once the area above was clear.



## RF55® A STRONG AND RELIABLE SOLUTION!

Fielders RF55® is a traditional flat pan or 're-entrant' profile, it provides unmatched performance in suspended concrete slabs. Used in both concrete and steel frame construction it utilises patented technology to achieve superior spanning capabilities, less deflection and greater composite strength than similar re-entrant profiles.

- RF55® comes complete with a range of accessories allowing for easy suspension of ceilings and services.
- Stronger composite strength: RF55® is stronger than similar decks due to the patented ReLok corner embossments. ReLok develops a strong mechanical interlock with the concrete slab.
- Greater spanning capacities: RF55® is stronger than similar decks in positive bending and end shear due to the dovetail ribs which resist lateral deflection.
- RF55® is available in two sheet widths. The traditional 600mm wide cover, 3 pan (3P), and the easy to handle, 400mm wide cover, 2 pan (2P).
- The RF55®-2P is equivalent in all aspects technically to the RF55®-3P. Similarly, the recommendations for RF55® in construction also apply to both RF55®-3P and RF55®-2P.

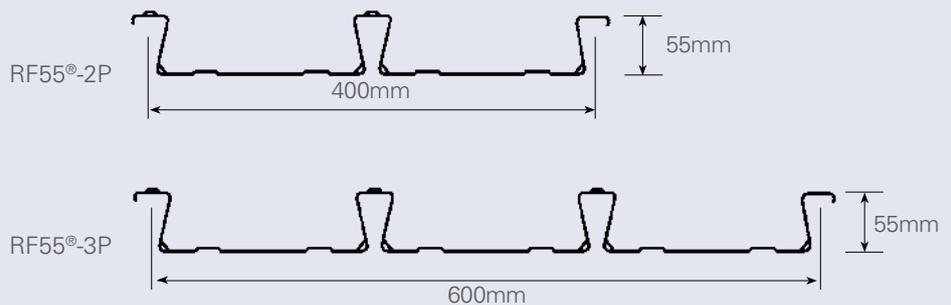

RF55® is manufactured from G550 (550 MPa Yield Stress) DECKFORM® steel with a Base Metal Thickness (BMT) of 0.60mm, 0.75mm, and 1.00mm. The thicknesses of 0.90mm and 1.20mm BMT are also available on request. The galvanised coating thickness is a Z350 (350 g/m<sup>2</sup>) in accordance with AS 1397:2001.

Material Properties	0.60 BMT	0.75 BMT	0.90 BMT	1.00 BMT
Mass Area – Average mass of 2-PAN deck per plan area (kg/m <sup>2</sup> )	8.57	10.56	12.55	13.87
Mass Area – Average mass of 3-PAN deck per plan area (kg/m <sup>2</sup> )	8.38	10.32	12.27	13.56
Mass Linear – Mass of individual 2-PAN length (kg/m)	3.43	4.22	5.02	5.55
Mass Linear – Mass of individual 3-PAN length (kg/m)	5.03	6.19	7.36	8.14
Zinc Coating (g/m <sup>2</sup> ) (Z350)	350	350	350	350
Yield Strength (MPa)	550	550	550	550



## RF55® IN THE MARKET - 480 QUEEN STREET, BRISBANE

### PROJECT SPECIFICS:

68,000m<sup>2</sup> of KingFlor® RF55®

### MATERIALS:

KingFlor® RF55®

### ARCHITECT:

BVN

### STRUCTURAL ENGINEER:

Aurecon

### THE PROJECT

Constructed as Brisbane's first steel tower in 30 years, 480 Queen Street is a premium grade commercial office development incorporating a publicly accessible pedestrian street and elevated park that establishes a new office building typology for Brisbane's Central Business District.

Termed a 'Campus Tower', the development is designed to incorporate a carefully considered commercial and public realm solution meeting the brief for 'Premium' grade office accommodation.

### THE SOLUTION

KingFlor® RF55® was chosen for the Queen Street project due to its superior spanning capability and lower preparatory costs. RF55®'s reduced need for temporary props allowed a fast-track construction to assist the builders in on-time completion.

### THE PROCESS


The supply of the KingFlor® RF55® decking profile commenced in 2014. The entire development was completed and open to the public in February 2016.



## KF57® INSTALLATION MADE EASY!

Fielders KF57® provides steel formwork solutions suitable for composite concrete slabs in concrete and steel framed construction. Light, easy to use, steel decking designed to combine with a concrete slab to produce a composite concrete slab system. KF57® incorporates an improved deck profile with deeper pan stiffeners.

- Permanent composite formwork system: Once laid, KF57® becomes a permanent part of the slab, eliminating the need for formwork stripping.
- Unique profile: Wide pans allow for clear access for in-floor services.
- Minimal propping: Less propping congestion and easy access to the underside of the slab.
- Supplied pre-cut to length, with 300mm wide cover: Quick to install.
- Reinforcing mesh can be laid directly on to the ribs: In many applications there is no need for mesh support stools.
- Closed rib profile, fully embedded in concrete slab: Major reduction in fire reinforcement.

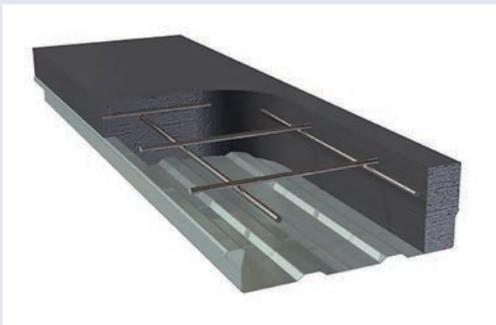

KF57® is manufactured from G550 (550 MPa Yield Stress) DECKFORM® steel with a Base Metal Thickness (BMT) of 0.60mm, 0.75mm and 1.00mm. The galvanised coating thickness is a Z350 (350 g/m<sup>2</sup>) in accordance with AS 1397:2001.

Material Properties	0.60 BMT	0.75 BMT	1.00 BMT
Mass Area – Average mass of fitted deck per plan area (kg/m <sup>2</sup> )	8.09	9.97	13.10
Mass Linear – Mass of individual length (kg/m)	2.43	2.99	3.93
Zinc Coating (g/m <sup>2</sup> ) (Z350)	350	350	350
Yield Strength (MPa)	350	350	350



## KF57® IN THE MARKET - SOUTH AUSTRALIAN HEALTH AND MEDICAL RESEARCH INSTITUTE

### PROJECT SPECIFICS:

3,000m<sup>2</sup> of KingFlor® KF57®

### MATERIALS:

KingFlor® KF57®

### ARCHITECT:

Woods Bagot

### CONTRACTOR:

Formwork: System Formwork

### THE PROJECT

Heralded a 'game-changer' for architecture in South Australia, the \$200 million South Australian Health and Medical Research Institute (SAHMRI) building in Adelaide's CBD has redefined the city's north-western skyline. Designed by architectural firm Woods Bagot, the world-class building was constructed to house up to 700 researchers as the state's leading medical research facility, being the first stage of a new health and bio-medical precinct.


Fielders were contracted to provide 3,000m<sup>2</sup> of KingFlor® KF57® structural formwork, for the new development.

### THE SOLUTION

KingFlor® KF57® was chosen for the SAHMRI building due to its longer spanning capability and lower preparatory costs. KF57®'s reduced need for temporary props allowed a fast-track construction to assist the builders in on-time completion.

### THE PROCESS

KingFlor® KF57® was installed in the SAHMRI building throughout the floor-by-floor construction of the complex.

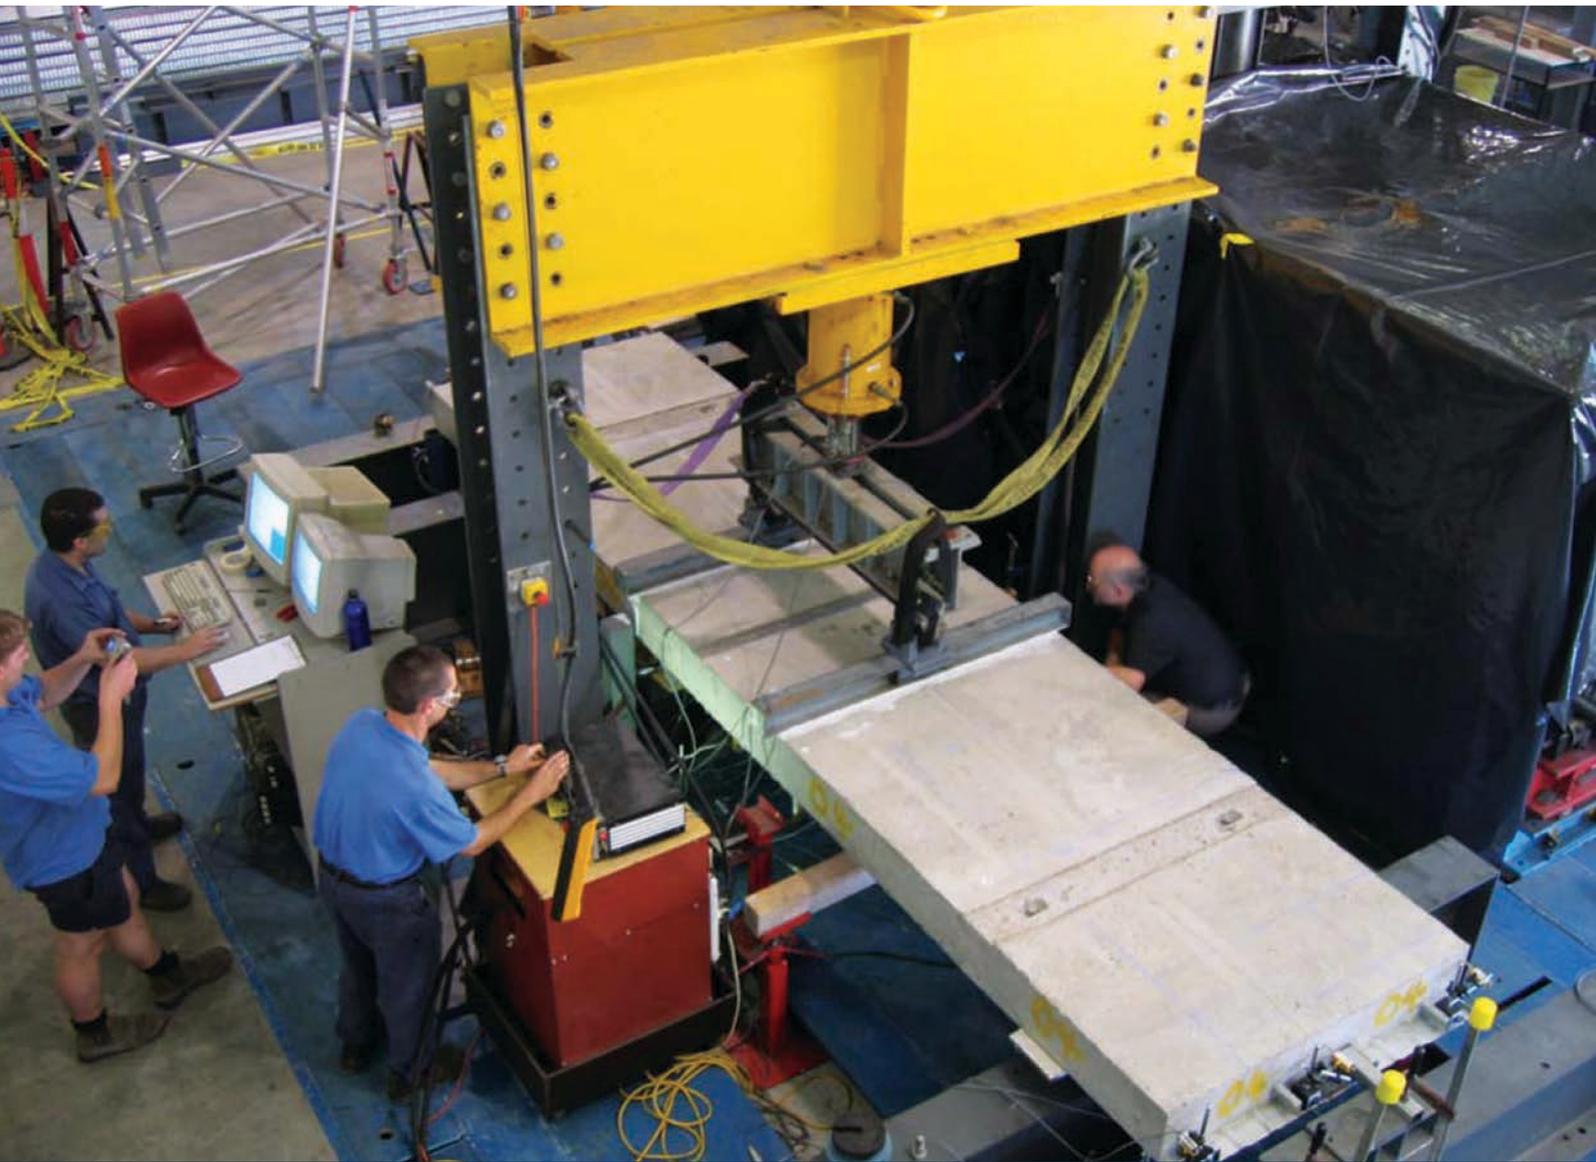

## PT PLUS™ DESIGN SOLUTIONS

Limited research has previously been conducted into the behaviour of prestressed composite floors incorporating steel decking, and yet in recent times it has become a popular form of construction in Australia due to the economic advantages of using steel decking as a substitute for conventional formwork systems in post-tensioned, concrete-frame buildings. Structural design engineers normally completely ignore the presence of the steel decking, foregoing some of its benefits and ignoring potential problems, although sometimes they are making arbitrary decisions about the extent to which the steel decking might act as main tensile reinforcement in the direction of the sheeting ribs, in order to justify their designs. With the development and general acceptance of reliable and efficient partial shear connection strength theory for composite slabs incorporating steel decks that develop strong mechanical resistance, it has been

possible to develop a **sound method for strength design of post-tensioned composite slabs**, with Fielders' KingFlor® profiles leading to more efficient economical slab designs.

### **PT Plus™ – Moment Capacity Tables**

Fielders' market leading research has led to the development of PT Plus™, a completely new set of design positive moment capacity tables to assist with the design of one-way, post-tensioned composite slabs incorporating Fielders' KingFlor® composite steel formwork profiles and bonded prestressing strands as tensile reinforcement in the slab bottom face. Fielders are able to assist structural design engineers in incorporating a PT Plus™ solution to their project, thereby **accessing potential savings by utilising the KingFlor®'s contribution to the slab.**



## KingFlor® Designer Software

Fielders KingFlor® Designer Suite Software is the most **comprehensive and reliable** way to design and specify every aspect of your suspended composite slab in both steel frame and concrete frame construction.

KingFlor® Designer Suite includes KingBeam for composite beam design with KingFlor® profiles. KingSlab and KingFire is also available on KingFlor® Designer Suite for the optimal design of KingFlor® in concrete frame construction.

**For more information visit [fielders.com.au](http://fielders.com.au)**





fielders.com.au | 1800 182 255

