The image features a wooden background with a black grid. The top half is a light brown wood, and the bottom half is a dark blue wood. The right side of the image is partially obscured by a vertical strip of white and grey horizontal lines, and a pile of blue pebbles is visible at the bottom right corner.

CLADDING

PARKLEX PRODEMA

CLADDING

PARKLEX PRODEMA



NATURCLAD-W is a laminated wood board for exteriors that requires zero maintenance.

The panels combine the virtues of wood, its natural warmth and beauty, with technical requirements to ensure optimum performance on exteriors over time.

NATURCLAD-W can be installed as a ventilated façade by way of louvres or overlapping slats, on false ceilings and on curved walls.

Product: NATURCLAD-W / Wood: Rustik
Sutton Offices in Magog (Quebec, Canada)



Zero maintenance wood

The surface composition of the NATURCLAD-W boards protects the wood from the most extreme weather conditions, removing any need for subsequent treatment.

Weather resistance

The EN 438-6:2005 European standard specifies that compact exterior cladding such as NATURCLAD-W must offer a certain resistance to weather according to the Resistance to Artificial Weathering Test. After 3000 hours of exposure, the material should have a rating variation of ≥ 4 in appearance, and a rating of ≥ 3 in contrast. NATURCLAD-W attains these values following exposure of up to 5 times greater than regulatory requirements.

Fire safety

The basic safety requirements reduce the risk of damage caused by accidental fire due to the characteristics of the project, construction, use and maintenance of the building to acceptable limits. NATURCLAD-W has achieved the best possible result for organic materials under regulations EN 13501 and US ASTM/NFPA for reaction to fire, which means that our products are approved all over the world.

Installation versatility

NATURCLAD-W can be installed as a ventilated façade by way of louvres or overlapping slats, on false ceilings and on curved walls. It has four different installation systems, which makes them easily adaptable to any kind of architectural requirement.

Product: NATURCLAD-W / Wood: Rustik
Paleen View Residence, by Workshop AD
(Anchorage, AK, USA)






Product: NATURCLAD-W / Woods (from left to right): Pale, Onix, Rustik
Residences in Pacific City, by MVE Architects (Huntington Beach, CA, USA)





Product: NATURCLAD-W / Wood: Rustik
Residences in Pacific City, by MVE Architects
(Huntington Beach, CA, USA)

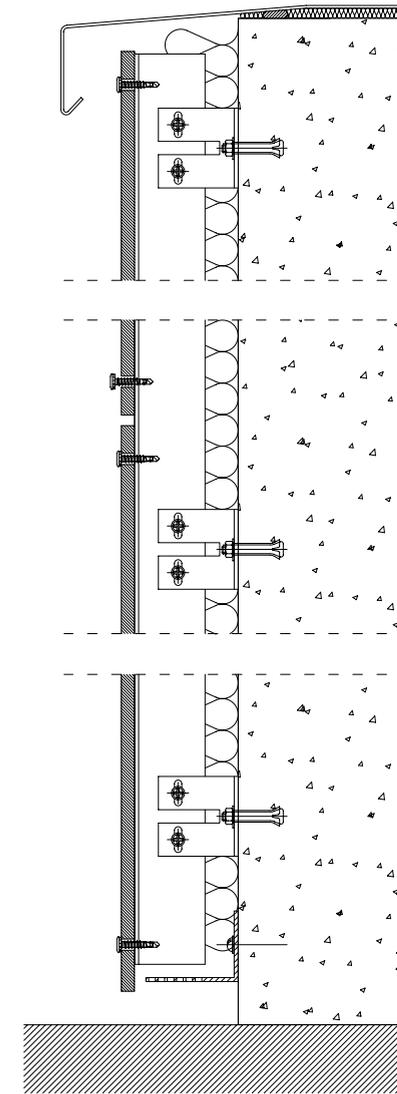

The ventilated façade is an efficient bioclimatic architecture solution that provides thermal insulation. In other words, it reduces heat dissipation in the cold months and heat absorption in the warmer months, resulting in a marked improvement in comfort inside the building.



Product: NATURCLAD-W / Wood: Onix
Manning Toronto, by Richard Wengle Architects Inc. (Toronto, ON, Canada)





Product: NATURCLAD-W / Wood: Rustik
Lazaridis Hall, Wilfrid Laurier University, by Diamond Schmitt Architects
with David Thompson Architect Ltd. (Waterloo, Ontario, Canada)



Product: NATURCLAD-W / Wood: Quartz
Turnagain Beach House Anchorage, by KPB Architects (Alaska, AK, USA)





Product: NATURCLAD-W / Wood: Rustik
The Point, Tadley Community Centre, by Ayre Chamberlain
Gaunt Architects (Hampshire, UK)



Product: NATURCLAD-W / Wood: Rustik
Residence in Varese, by Franzetti Primi Architetti Associati (Varese, Italy)







Product: NATURCLAD-W / Wood: Rustik
Residences in Rue des Orteaux, by Bob361 Architectes (Paris, France)



Product: NATURCLAD-W / Wood: Rustik
Rainbow Group Headquarters, by Studio Bianchi
(Loreto, Ancona, Italy)





Product: NATURCLAD-W / Woods: Rustik and Antra
Gateway Apartments, by Brooks+Scarpa Architects (Marina Del Rey, CA, USA)



The NATURCLAD-W panels are available in nine shades that are obtained through ayous or okume veneer, which we get from forests that respect controlled felling.



AMBAR



ANTRA



NUX

Due to the fact that wood is a natural product, each veneer must be considered as unique. The presence of slight differences in colour and structure is normal. Peculiarities such as knots or resin inclusions are not considered to be defects, but as part of the decoration. Depending on the species and the source of the wood, differences in performance may be observed, as regards the colour's light fastness. For this reason, no claims will be admitted on the basis of changes in tone between the sample and the end product.



RUSTIK




QUARTZ




PALE



RUBI



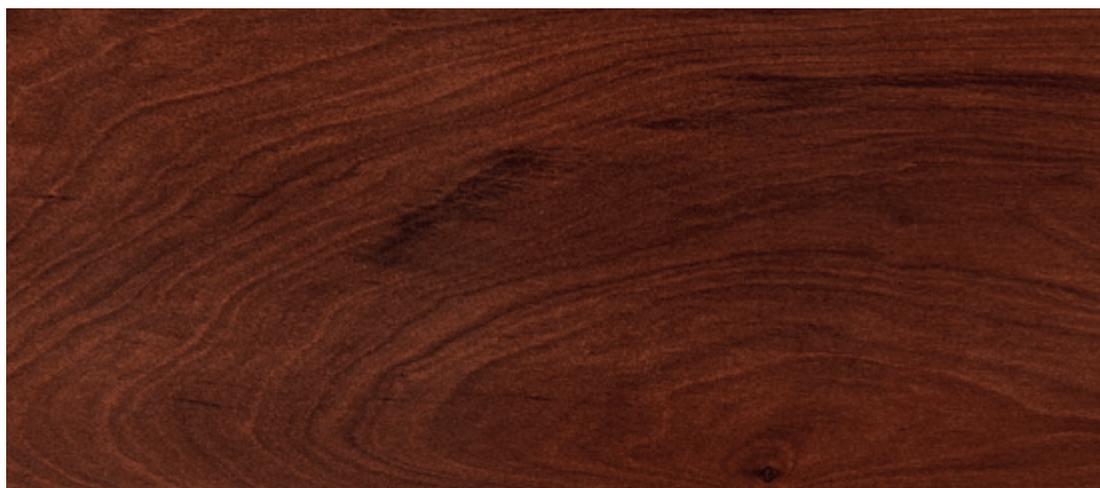


ONIX

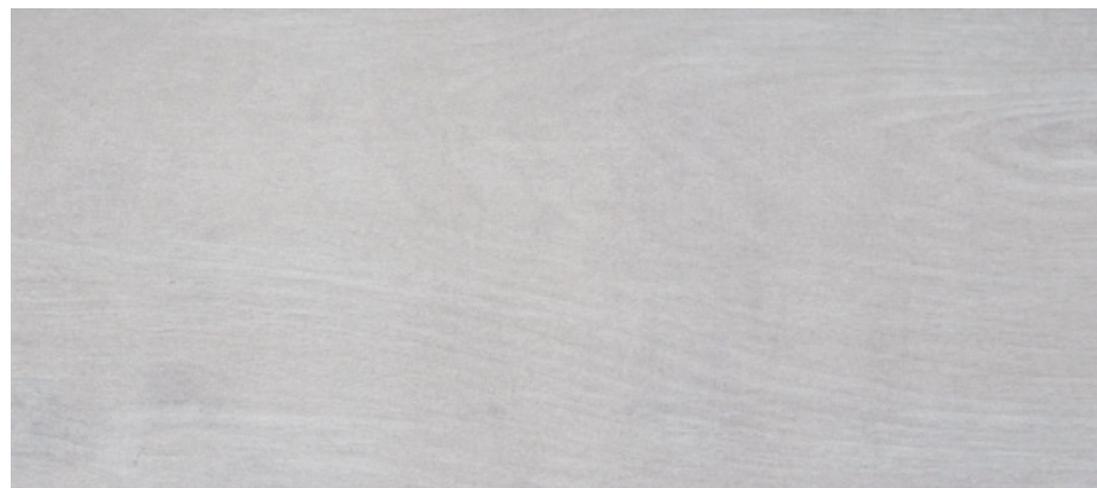

SILVER

Product: NATURCLAD-W / Wood: Rustik
Le Monastère des Augustines, by ABCP
Architecture (Quebec, Canada)

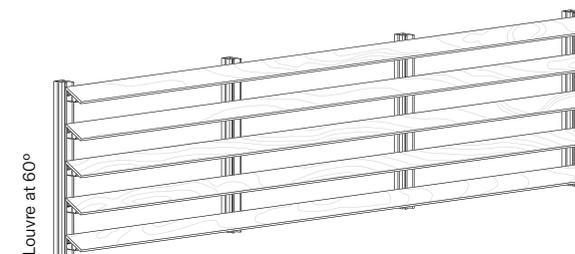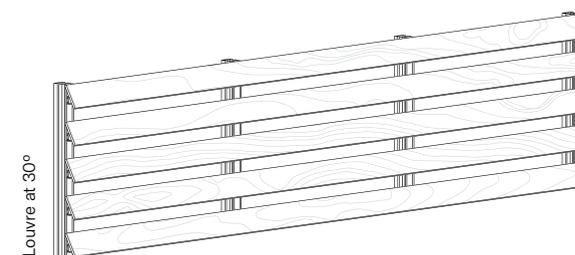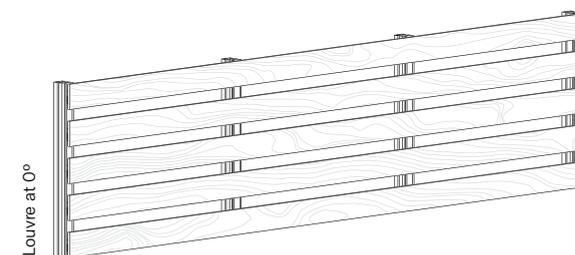


The NATURCLAD-W installation system in fixed louvre mode enables slats to be installed at 0°, 30° and 60°, both horizontally and vertically.

Valid for boards with a thickness of ≥ 10 mm. Parklex Prodema supplies the slats in three different widths: 86, 94 and 114 mm, with a maximum slat length of 2440 mm.



Product: NATURCLAD-W, NATURPANEL-W / Wood: Rustik
Le Monastère des Augustines, by ABCP Architecture
(Quebec, Canada)

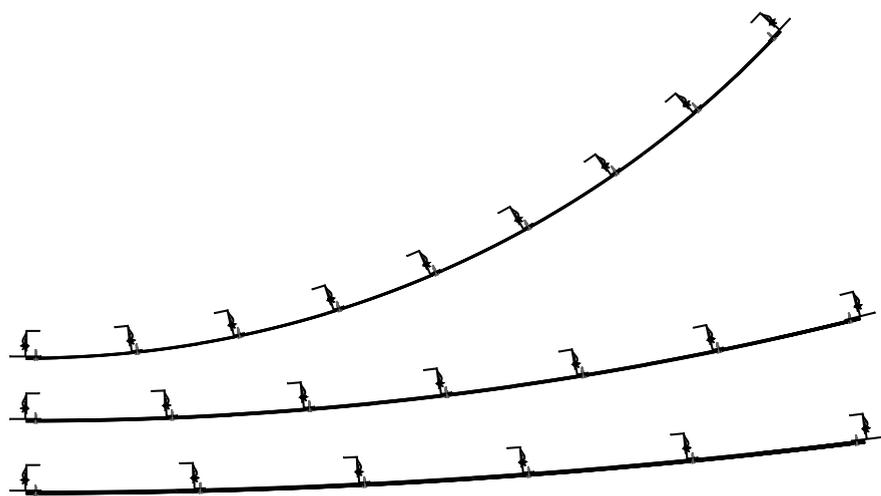


The flexibility of the wood fibres allows NATURCLAD-W panels to adapt to certain radii of curvature, whether concave or convex.

Parklex Prodema offers two different solutions for projects that require NATURCLAD-W to be installed as a curved façade cladding: either standard panels, if radii above 3 m are required; or pre-bent panels, if smaller radii are required.






Product: NATURCLAD-W / Wood: Rustik
Alliance 1892, Cognac Museum and Cellar, by TOTEMENT | PAPER
(Chernyakhovsk, Kaliningrad, Russia)

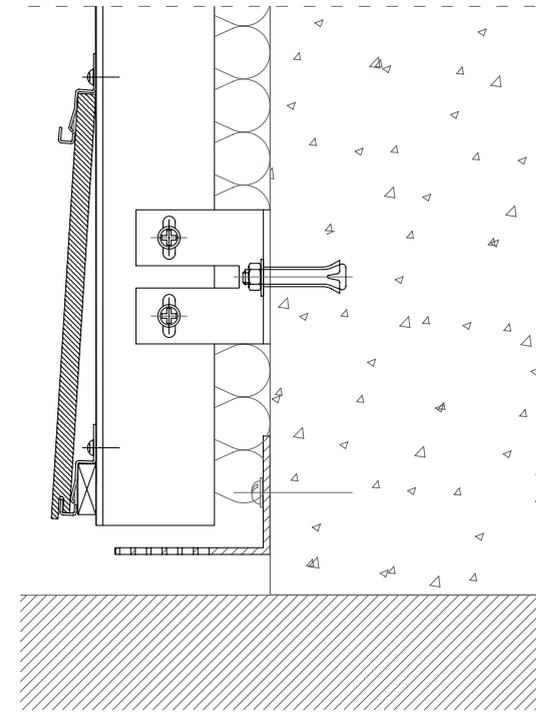

The overlapping slats system enables a range of assembly procedures without needing to change the position of the parts' profiles.


Two different slat widths are supplied: 190 and 290 mm, both with a maximum length of 2440 mm. This concealed fixing system is only valid for thicknesses of 8 mm.

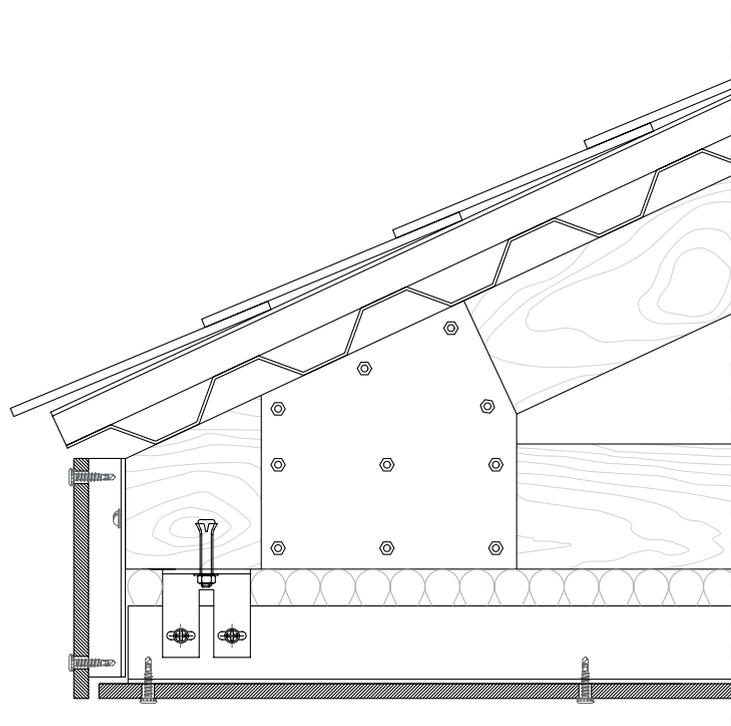

NATURCLAD-W boards can be installed on false ceilings by means of exposed or concealed fixing systems.

In the case of false ceilings, a minimum perimeter space of 20 mm must be left to enable ventilation through the chamber.



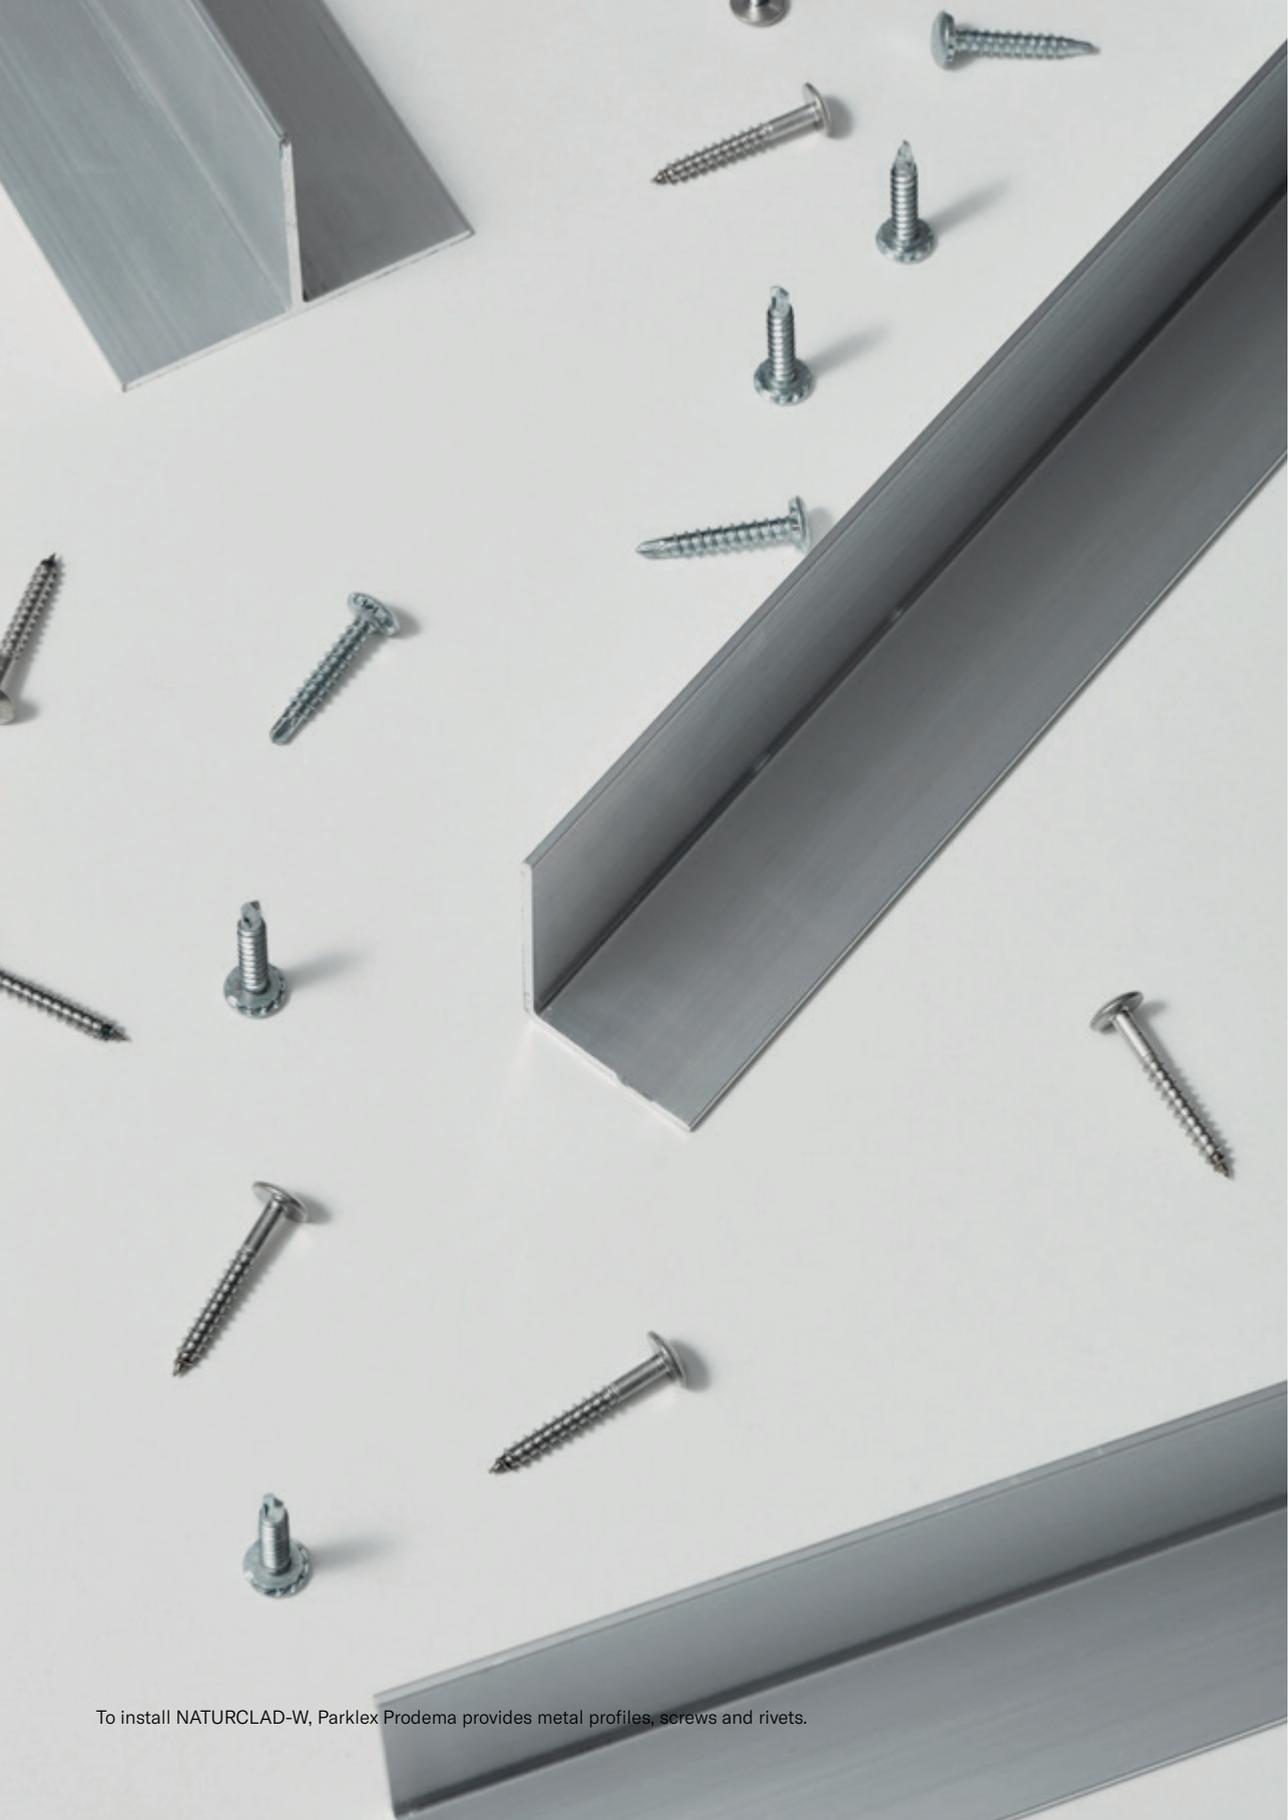

To install NATURCLAD-W, Parklex Prodema provides metal profiles, screws and rivets.

EDITING & PRODUCTION
PARKLEX PRODEMA

ART DIRECTION
JAUME RAMÍREZ STUDIO

TEXT
CHESCA GUIM

CORPORATE PHOTOGRAPHY
MARÇAL VAQUER
YOSIGO

PROJECT PHOTOGRAPHY
11H45
GLEB LEONOV
JESUS MARTIN RUIZ
KEVIN G. SMITH

PRINTED IN BARCELONA
BY AGPOGRAF



WWW.PARKLEXPROMEMA.COM