

# FISHER & PAYKEL

## SPECIFICATION GUIDE

## INTEGRATED SINGLE DISHDRAWER™ DISHWASHER, TALL, SANITISE



### OVERVIEW

Introducing our new Series 11 DishDrawer™ Dishwasher with stainless steel tub. Designed to blend seamlessly with kitchen cabinetry, this dishwasher is panel ready. Easy to open and close, it can be conveniently positioned at bench height for ease of loading and minimal bending. A combination of clever technology and simple mechanics provides greater reliability and better wash performance.

### MODELS

**Integrated Single DishDrawer™ Dishwasher, Tall, Sanitise**  
DD60STX6I1  
DD60STX6HI1

### SERIES & STYLE

Series 11  
Integrated style

### FEATURES

- ① Ergonomic kitchen drawer design with soft-close mechanism and knock-to-pause function
- ② Single DishDrawer™ Dishwashers can be positioned at bench height for ease of loading and minimal bending
- ③ Seven place settings with adjustable racking to fit taller dishes up to plate size in top drawer\*
- ④ Built to withstand your wash requirements with easy-to-clean stainless steel interior
- ⑤ Eight wash programs from heavy to light, including auto, 60 minute wash and glassware programs
- ⑥ Quiet, Extra Dry and Sanitise wash modifiers provide extra wash options
- ⑦ Spray arm sensing for a reliable wash
- ⑧ Fan-assisted drying removes moisture from the final rinse leaving your dishes with a dry finish
- ⑨ Improved water and energy performance, delivering a powerful wash with optimal results\*\*
- ⑩ WiFi capable for a greater user experience\*\*\*

\*UK/EU models have six place settings per drawer

\*\*AU/NZ: 3.5 star energy, 5.5 star water (WELS)

BI/EU: D energy efficiency class

SG: 3 ticks water rating

\*\*\*Not available in China models

### ACCESSORIES

- ① Cutlery basket included

# FISHER & PAYKEL


## SPECIFICATION GUIDE

## INTEGRATED SINGLE DISHDRAWER™ DISHWASHER, TALL, SANITISE

### SPECIFICATIONS


<b>Model No.</b>	DD60STX6II, DD60STX6HI1
<b>Dimensions</b>	H 454mm W 599mm D 553mm
<b>Weight</b>	35kg
<b>Electrical</b>	
<b>Supply</b>	220-240V, 50Hz
<b>Service</b>	4.2A
<b>Outlet</b>	3-prong grounding type
<b>Plumbing</b>	
<b>Supply</b>	3/4" BSP (GB20)
<b>Pressure</b>	0.03-1Mpa

### PLUMBING AND ELECTRICAL

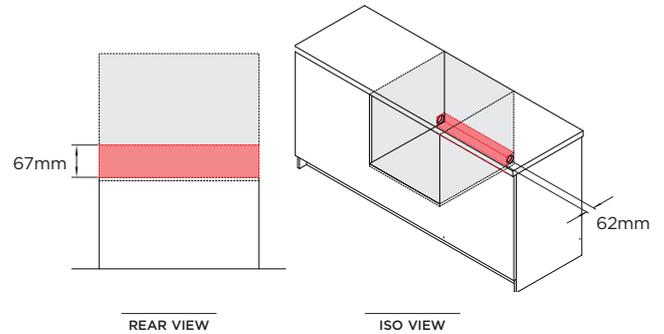


Service outlet at rear extends both sides, hoses and cords can be routed to either or both sides.

### PRODUCT DIMENSIONS

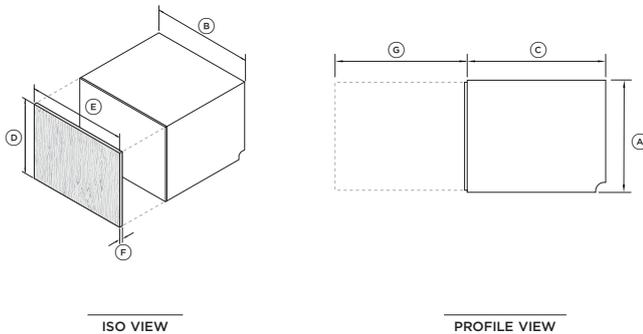

### CAVITY DIMENSIONS: STANDARD INSTALLATION

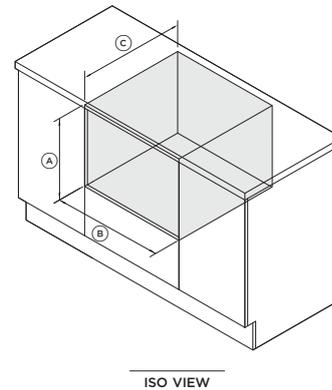

	mm
(A) Overall height	454
(B) Overall width	599
(C) Overall depth*	553
(D) Minimum height of custom front panel	452
(E) Minimum width of custom front panel	596
(F) Depth of custom front panel	16-20
(G) Depth of drawer opening*	527

\*excluding custom panels and handles

	mm
(A) Minimum inside height*	456
(B) Minimum inside width	600
(C) Minimum inside depth**	561

\*depending on adjustment of levelling feet

\*\*including front panels