



# Galaxy Series

315W + 335W

Galaxy Series is a featherlight BIPV (building integrated photovoltaic) product designed for industrial and commercial applications. With an ultra-lightweight design and frameless surface, Galaxy is especially ideal for low load-bearing and poor waterproofing roofs while ensuring power generation efficiency. It is worth mentioning that the 1.6mm ultra-thin glass is added to Galaxy, which greatly helps improve its ability to resist strong impact from hail and high wind, bringing durability and safety to buildings with all-weather protection. Furthermore, various installation methods and the integrated design also enable rapid and streamlined installation, resulting in significant cost savings out of reduced labour time.



## Ultra-lightweight

- 60% lighter than conventional modules
- Suitable to roofs with a low load-bearing capacity



## High Reliability

- Wind<sup>1</sup> and hail<sup>2</sup> impact resistance
- Reduced fire risks

1 Internal lab test from CANLON company  
2 Third-party TUV lab: report number CN22Z6P8 001



## Various Installation Methods


- Clamps for standing seam metal roofs
- Hot air welding for roofs with TPO waterproofing membrane
- Glue for flat roofs



## High Power Generation

- High-efficiency Mono PERC cells
- 2% less generation loss<sup>3</sup> with ventilation design

3 Based on internal lab test due to better ventilation @ 0.34%/°C

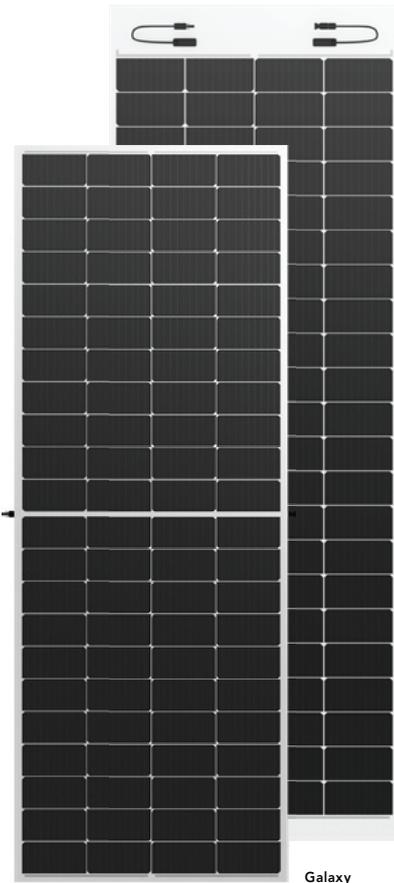


Galaxy  
335W

Galaxy  
315W

### 30-year power generation performance guarantee

- ✓ 2% degradation in the first year
- ✓ 12-year product warranty
- ✓ 0.55% decay per year
- ✓ 30-year power guarantee

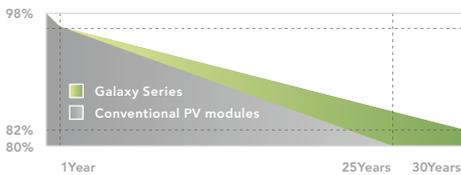

#### Structural Data

	315W	335W
Size	2319×777×4mm	2116×777×3.5mm
Weight	11kg	9.3kg
Unit Weight	6kg/m <sup>2</sup>	5.6kg/m <sup>2</sup>
Strengthening Layer	1.6mm reinforced glass	4.6mm reinforced glass
Cell Type	182 Mono PERC	182 Mono PERC
Connector	MC4-Evo 2	MC4-Evo 2

#### Electrical Data (STC)

STC: AM=1.5, Irradiance 1000W/m<sup>2</sup>, Component Temperature 25° C

Max Power (Pmax)	315W	335W
Voltage at Max Power (Vmpp)	25.65V	25.68V
Current at Max Power (Impp)	12.30A	13.05A
Voltage at Open Circuit (Voc)	30.53V	30.47V
Current at Short Circuit (Isc)	12.90A	13.88A
Module Efficiency	17.4%	20.4%

#### Operation Conditions

Maximum System Voltage	DC1500V	DC1500V
Maximum Fuse Rating Operation	25A	25A
Temperature Range	-40°C ~+85°C	-40°C ~+85°C
Hail Test	Hail diameter: 25mm Specified speed: 23m/s	

#### Temperature Parameters

Isc TP	0.048%/°C	0.048%/°C
Voc TP	-0.28%/°C	-0.28%/°C
PMPP TP	-0.35%/°C	-0.35%/°C

#### Carbon Neutral Index (30 years)

\*Based on simulation result 100kWp system in Sydney

Annual Average Output	112512 kWh	112512 kWh
Carbon Emission Reduction	1924980kg	1924980kg
Equivalent Trees	17499	17499

