


Angle	Headroom Clearance	1250 x 800 Platform Size	1000 x 800 Platform Size	950 x 780 Platform Size
A	B	C	C	C
20°	2000	2045	1795	1745
22°	2000	1980	1730	1680
25°	2000	1915	1665	1585
27°	2000	1870	1620	1570
30°	2000	1825	1575	1525
32°	2000	1790	1540	1490
35°	2000	1760	1510	1460
37°	2000	1740	1490	1440
40°	2000	1710	1460	1410
42°	2000	1690	1440	1390
45°	2000	1670	1420	1370

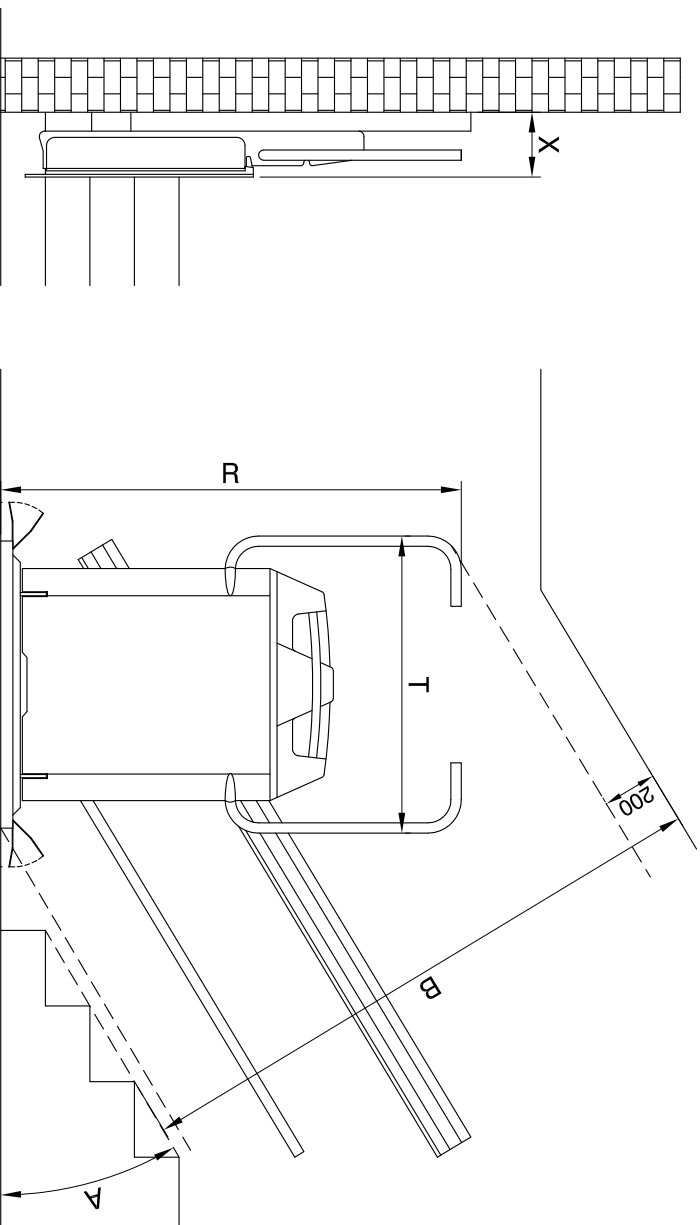

	1250 X 800	1000 X 800	950 X 780
R	1705	1705	1705
S	1600	1350	1300
T	1100	1100	1100
U	1250	1000	950
V	800	800	780
X	300**	300**	300**
Y	1050**	1050**	1030**
Z *	1140**	1140**	1120**

* = Additional side access ramp
 ** = +70mm for stanchion mounted rail

Stairiser Platform Specification

- Load: 230kg / 1 wheelchair
- Drive: Rack and Pinion
- Speed: 0.1m / sec
- Travel: subject to survey
- Stops: 2
- Motor: 1.1kw
- Power: 240v 1ph 50Hz 10A
- Colour: RAL 7035 as standard (alternative RAL colours available)

Unit 24, 49-51, Mitchell Rd
 Brookvale NSW, 2100
 Tel - 1300 884 960
 Fax - +61 2 8880 5046
 Email - info@platformliftco.com.au
 website - www.platformliftco.com.au

TITLE: **Cama C7 Straight Stairlift**

DWG NO.: **CAMA C7-STD**

SCALE: **NTS** DATE: **27/05/2011** DRAWN: **CH**

REV: **A**

Note - Platform carriage available as a left hand or right hand unit