



LUMME

LED LIGHTING

Why Switch to LED?



Eco Friendly

LED lights do not contain mercury or other harmful gases. They are designed to be 100% recyclable.



Rapid Brightening

LED lights switch on at their intended brightness every single time and throughout their lifetime.



Energy Saving

LED Lights use 85% less electricity than standard halogen lights use.



Durable Quality

LED lights have no filaments therefore can withstand more shocks than traditional bulbs.



Long Lifespan

LED lights can last up to 40,000 hours, over 8-10 times longer than a traditional bulb.

Industry
Certificate:



RoHS
COMPLIANT

ISO
9001 : 2008
REGISTERED

Lumme is a proud member of:



Lighting Council
AUSTRALIA MEMBER

LUMEN LED LIGHTING

| | |
|----------------------------|-----|
| Downlights & Accessories | 86 |
| Oyster Lights | 97 |
| Wall Lights | 101 |
| Globe Lights | 103 |
| Battern & Tube Lights | 105 |
| Flood Lights | 110 |
| Wall Lights | 115 |
| Par & Shop Front Lights | 118 |
| Pendant Lights | 121 |
| Track Lights & Rails | 122 |
| Strip Lights & Accessories | 126 |
| Panel Lights | 130 |
| LED Modules | 134 |
| Highbay Lights | 136 |
| Exit Lights | 138 |
| Garden Lights | 139 |



DOWN LIGHTS

LUMME-DL06-18W



FEATURES

- Full down light kit
- Soft and comfortable light rays
- Frosted diffusion lens
- Advanced heat management
- Life time 50000 Hours
- Compact adapter

| CODE | LUMME-DL06-18W |
|-------------------|-------------------|
| APPLICATION | Interior |
| WATTAGE | 18W |
| WORKING VOLTAGE | AC200-240V |
| SIZE OF UNIT | 162mm x 64mm |
| INSTALLATION | Recess |
| LED TYPE | Samsung |
| COLOR TEMPERATURE | 3000K - 4000K |
| LUMEN | 1200LM - 1250LM |
| FINISH | White |
| MATERIALS | Aluminum + PMMA |
| DRIVER | SAA Approved |
| CRI | >83 |
| PLUG | 3 Pin plug + 1.2m |
| IP | IP54 |



DOWN LIGHTS

LUMME-DL06-25W



FEATURES

- Full down light kit
- Soft and comfortable light rays
- Frosted diffusion lens
- Advanced heat management
- Life time 50000 Hours
- Compact adapter

| CODE | LUMME-DL06-25W |
|-------------------|-------------------|
| APPLICATION | Interior |
| WATTAGE | 25W |
| WORKING VOLTAGE | AC200-240V |
| SIZE OF UNIT | 193mm x 75mm |
| INSTALLATION | Recess |
| LED TYPE | Samsung |
| COLOR TEMPERATURE | 3000K - 4000K |
| LUMEN | 1200LM - 1250LM |
| FINISH | White |
| MATERIALS | Aluminum + PMMA |
| DRIVER | SAA Approved |
| CRI | >83 |
| PLUG | 3 Pin plug + 1.2m |
| IP | IP54 |





DOWN LIGHTS

LUMME-DL06-33W



FEATURES

- Full down light kit
- Soft and comfortable light rays
- Frosted diffusion lens
- Advanced heat management
- Compact adapter
- Life time 50000 hours

| CODE | LUMME-DL06-33W |
|-------------------|-------------------|
| APPLICATION | Interior |
| WATTAGE | 33W |
| WORKING VOLTAGE | AC200-240V |
| SIZE OF UNIT | 225mm x 75mm |
| INSTALLATION | Recess |
| LED TYPE | Samsung |
| COLOR TEMPERATURE | 6000K |
| LUMEN | 2520LM |
| FINISH | White |
| MATERIALS | Aluminum + PMMA |
| DRIVER | SAA Approved |
| CRI | 83 |
| PLUG | 3 Pin plug + 1.2m |
| IP | IP54 |



DOWN LIGHTS

LUMME-DL17-13W



FEATURES

- Full down light kit
- New design with anti-glare lens
- Aluminum heat sink design
- Compact adapter allows unit to fit into existing cut out holes
- Life time 50000 hours

| CODE | LUMME-DL17-13W |
|-------------------|---------------------|
| APPLICATION | Interior |
| WATTAGE | 13W |
| WORKING VOLTAGE | AC200-240V |
| SIZE OF UNIT | 110mm x 42mm |
| INSTALLATION | Recess |
| LED TYPE | COB Sharp |
| COLOR TEMPERATURE | 3000K - 4000K |
| LUMEN | 820LM - 890LM |
| FINISH | White |
| MATERIALS | Aluminum + PC Clear |
| DRIVER | SAA Approved |
| CRI | >83 |
| PLUG | 2 Pin plug + 1.2m |
| IP | IP44 |





DOWN LIGHTS

LUMME-DL17-18W



FEATURES

- Full down light kit
- New design with anti-glare lens
- Aluminum heat sink design
- Compact adapter allows unit to fit into existing cut out holes
- Life time 50000 Hours

| CODE | LUMME-DL17-18W |
|-------------------|----------------------|
| APPLICATION | Interior |
| WATTAGE | 18W |
| WORKING VOLTAGE | AC200-240V |
| SIZE OF UNIT | 140mm x 53mm |
| INSTALLATION | Recess |
| LED TYPE | COB Sharp |
| COLOR TEMPERATURE | 3000K - 4000K WW, NW |
| LUMEN | 1250LM - 1300LM |
| FINISH | White |
| MATERIALS | Aluminum + PC Clear |
| DRIVER | SAA Approved |
| CRI | >83 |
| PLUG | 2 Pin plug + 1.2m |
| IP | IP44 |



DOWN LIGHTS

LUMME-DL17-35WW



FEATURES

- Full down light kit
- New design with anti-glare lens
- Aluminum heat sink design
- Compact adapter allows unit to fit into existing cut out holes
- Life time 50000 Hours

| CODE | LUMME-DL17-35W |
|-------------------|---------------------|
| APPLICATION | Interior |
| WATTAGE | 35W |
| WORKING VOLTAGE | AC200-240V |
| SIZE OF UNIT | 225mm x 87mm |
| INSTALLATION | Recess |
| LED TYPE | COB Sharp |
| COLOR TEMPERATURE | 5000K |
| LUMEN | 2670LM |
| FINISH | White |
| MATERIALS | Aluminum + PC Clear |
| DRIVER | SAA Approved |
| CRI | >83 |
| PLUG | 2 Pin plug + 1.2m |
| IP | IP44 |





DOWN LIGHTS

LUMME-DL22-10W (2 sizes)



FEATURES

- Full down light kit
- Frosted diffusing lens
- Advanced heat management
- Compact adapter allows unit to fit into existing cut out holes
- Life time 50000 Hours

| CODE | LUMME-DL22-10W |
|-------------------|-------------------------|
| APPLICATION | Interior |
| WATTAGE | 10W |
| WORKING VOLTAGE | 240V |
| SIZE OF UNIT | 85mmx35mm or 101mmx35mm |
| INSTALLATION | Recess |
| LED TYPE | Samsung |
| COLOR TEMPERATURE | 3000K (WW) - 4000K (NW) |
| LUMEN | 680LM - 730LM |
| FINISH | White |
| MATERIALS | Aluminum + PMMA |
| DRIVER | SAA Approved |
| CRI | >83 |
| PLUG | 2 Pin plug + 1.2m |
| IP | IP44 |



DOWN LIGHTS

LUMME-DL22-13W



FEATURES

- Full down light kit
- Frosted diffusing lens
- Advanced heat management
- Compact adapter allows unit to fit into existing cut out holes
- Life time 50000 Hours

| CODE | LUMME-DL22-13W |
|-------------------|-------------------------|
| APPLICATION | Interior |
| WATTAGE | 13W |
| WORKING VOLTAGE | 240V |
| SIZE OF UNIT | 110mm x 35mm |
| INSTALLATION | Recess |
| LED TYPE | Samsung |
| COLOR TEMPERATURE | 3000K (WW) - 4000K (NW) |
| LUMEN | 950LM - 1150LM |
| FINISH | White / Brush Nickel |
| MATERIALS | Aluminum + PMMA |
| DRIVER | SAA Approved |
| CRI | >83 |
| PLUG | 2 Pin plug + 1.2m |
| IP | IP44 |





DOWN LIGHTS

LUMME-DL22-15W



FEATURES

- Full down light kit
- Frosted diffusing lens
- Advanced heat management
- Compact adapter allows unit to fit into existing cut out holes
- Life time 50000 Hours

| CODE | LUMME-DL22-15W |
|-------------------|--------------------|
| APPLICATION | Interior |
| WATTAGE | 15W |
| WORKING VOLTAGE | 240V |
| SIZE OF UNIT | 160mm x 27mm |
| INSTALLATION | Recess |
| LED TYPE | Samsung |
| COLOR TEMPERATURE | 3000K - 4000K |
| LUMEN | 1200LM - 1350LM |
| FINISH | White |
| MATERIALS | Aluminum + PMMA |
| DRIVER | SAA Approved |
| CRI | >83 |
| PLUG | 2 Pin plug + 1.2 m |
| IP | IP44 |



DOWN LIGHTS


LUMME-DL22-18W-4K



FEATURES

- Full down light kit
- Frosted diffusing lens
- Advanced heat management
- Compact adapter allows unit to fit into existing cut out holes
- Life time 50000 Hours

| CODE | LUMME-DL22-18W-4K |
|-------------------|-------------------|
| APPLICATION | Interior |
| WATTAGE | 18W |
| WORKING VOLTAGE | AC200-240V |
| SIZE OF UNIT | 245mm x 32mm |
| INSTALLATION | Recess |
| LED TYPE | Samsung |
| COLOR TEMPERATURE | 4000K |
| LUMEN | 1500LM |
| FINISH | White |
| MATERIALS | Aluminum + PMMA |
| DRIVER | SAA Approved |
| CRI | >83 |
| PLUG | 2 Pin plug + 1.2m |
| IP | IP44 |





DOWN LIGHTS

LUMME-DL51-15W & 18W



FEATURES

- Full down light kit
- New design with anti-glare lens
- Aluminum heat sink design
- Compact adapter allows unit to fit into existing cut out holes
- Residential & commercial

| CODE | LUMME-DL51-15W & 18W |
|-------------------|-----------------------|
| APPLICATION | Interior |
| WATTAGE | 15W & 18W |
| WORKING VOLTAGE | AC200-240V |
| SIZE OF UNIT | 128mm x 90mm |
| INSTALLATION | Recess |
| LED TYPE | COB Bridgelux |
| COLOR TEMPERATURE | 3000K - 4000K WW & NW |
| LUMEN | 1100LM - 1200LM |
| FINISH | White |
| MATERIALS | Aluminum + PC Clear |
| DRIVER | SAA Approved |
| CRI | >83 |
| PLUG | 2 Pin plug + 1.2m |
| IP | P20 |



DOWN LIGHTS

LUMME-DL52-12WD



FEATURES

- Full down light kit
- Frosted diffusing lens
- Advanced heat management
- Compact adapter allows unit to fit into existing cut out holes

| CODE | LUMME-DL52-12WD-4K |
|-------------------|---------------------|
| APPLICATION | Interior |
| WATTAGE | 12W |
| WORKING VOLTAGE | AC200-240V |
| SIZE OF UNIT | 105mm x 55mm |
| INSTALLATION | Recess |
| LED TYPE | COB Sharp |
| COLOR TEMPERATURE | 4000K |
| LUMEN | 780LM - 820LM |
| FINISH | White |
| MATERIALS | Aluminum + PC Clear |
| DRIVER | SAA Approved |
| CRI | >83 |
| PLUG | 2 Pin plug |
| IP | IP20 |





DOWN LIGHTS

LUMME-DL06-10W (2 sizes)



FEATURES

- Full down light kit
- Residential & Commercial
- Interior and exterior (conditions apply)
- New design with anti-glare lens
- Aluminum heat sink design
- Compact adapter allows unit to fit into existing cut out holes
- Life time 50000 Hours

| CODE | LUMME-DL06-18W |
|-------------------|------------------------|
| APPLICATION | Interior & Exterior |
| WATTAGE | 10W |
| WORKING VOLTAGE | AC200-240V |
| SIZE OF UNIT | 85mmx31mm & 110mmx38mm |
| INSTALLATION | Recess |
| LED TYPE | Samsung |
| COLOR TEMPERATURE | 3000K WW - 4000K NW |
| LUMEN | 630LM - 750LM |
| FINISH | White |
| MATERIALS | Aluminum + PMMA |
| DRIVER | SAA Approved |
| CRI | >83 |
| PLUG | N/A |
| IP | IP44 |



DOWN LIGHTS


LUMME-DL59-13W



FEATURES

- Full down light kit
- Residential & Commercial
- Interior and exterior (conditions apply)
- New design with anti-glare lens
- Aluminum heat sink design
- Compact adapter allows unit to fit into existing cut out holes
- Life time 50000 Hours

| CODE | LUMME-DL59-13W |
|-------------------|-------------------------|
| APPLICATION | Interior & Exterior |
| WATTAGE | 13W |
| WORKING VOLTAGE | AC200-240V |
| SIZE OF UNIT | 110mm x 38mm |
| INSTALLATION | Recess |
| LED TYPE | Samsung |
| COLOR TEMPERATURE | 3000K - 4000K - 6000K |
| LUMEN | 950LM - 1050LM - 1100LM |
| FINISH | White & Brush nickel |
| MATERIALS | Aluminum + PMMA |
| DRIVER | SAA Approved |
| CRI | >83 |
| PLUG | N/A |
| IP | IP44 |





DOWN LIGHTS

LUMME-DL59-10W-SQ



FEATURES

- Full down light kit
- Interior and exterior (conditions apply)
- New design with anti-glare lens
- Aluminum heat sink design
- Compact adapter allows unit to fit into existing cut out holes
- 50000 Hours

| CODE | LUMME-DL59-10W-SQ |
|-------------------|-------------------------|
| APPLICATION | Interior & Exterior |
| WATTAGE | 10W |
| WORKING VOLTAGE | AC200-240V |
| SIZE OF UNIT | 110mm x 110mm x 31mm |
| INSTALLATION | Recess |
| LED TYPE | Samsung |
| COLOR TEMPERATURE | 3000K - 4000K - 6000K |
| LUMEN | 950LM - 1050LM - 1100LM |
| FINISH | White / Brush nickel |
| MATERIALS | Aluminum + PMMA |
| DRIVER | SAA Approved |
| CRI | >83 |
| PLUG | 2 Pin plug + 1.2m |
| IP | IP44 |



DOWN LIGHTS

LUMME-DL59-30W



FEATURES

- Full down light kit
- Interior and exterior (conditions apply)
- New design with anti-glare lens
- Aluminum heat sink design
- Compact adapter allows unit to fit into existing cut out holes
- 50000 Hours

| CODE | LUMME-DL59-30W |
|-------------------|---------------------|
| APPLICATION | Interior & Exterior |
| WATTAGE | 30W |
| WORKING VOLTAGE | AC200-240V |
| SIZE OF UNIT | 230mm x 89mm |
| INSTALLATION | Recess |
| LED TYPE | Samsung |
| COLOR TEMPERATURE | 3000 / 4000 / 6000K |
| LUMEN | 3000LM |
| FINISH | White |
| MATERIALS | Aluminum + PMMA |
| DRIVER | SAA Approved |
| CRI | >83 |
| PLUG | 2 Pin plug + 1.2m |
| IP | IP44 |





DOWN LIGHTS

LUMME-DL53-13WD-4K-wht



| CODE | LUMME-DL53-13WD-4K-wht |
|-------------------|------------------------|
| APPLICATION | Interior |
| WATTAGE | 13W |
| WORKING VOLTAGE | 240V |
| SIZE OF UNIT | 88mm x 64mm |
| INSTALLATION | Recess |
| LED TYPE | COB Cree |
| COLOR TEMPERATURE | 4000K NW |
| LUMEN | 1150LM |
| FINISH | Gimble |
| MATERIALS | Aluminum + PMMA |
| DRIVER | SAA Approved |
| CRI | >83 |
| PLUG | 2 pin plug + 1.2m |
| IP | IP44 |

FEATURES

- Full down light kit
- Life time 50000 Hours



DOWN LIGHTS


LUMME-405-9WD-3K/4K



| CODE | LUMME-405-9WD-3K/4K |
|-------------------|----------------------------|
| APPLICATION | Interior |
| WATTAGE | 9W |
| WORKING VOLTAGE | 240V |
| SIZE OF UNIT | 99mm x 105mm |
| INSTALLATION | Recess |
| LED TYPE | COB Cree |
| COLOR TEMPERATURE | 3000K - 4000K |
| LUMEN | 780LM |
| FINISH | Deep Recess & White finish |
| MATERIALS | Aluminum + PMMA |
| DRIVER | SAA Approved |
| CRI | >83 |
| PLUG | 2 pin plug + 1.2m |
| IP | IP44 |

FEATURES

- Full down light kit
- Life time 50000 Hours





DOWN LIGHTS

LUMME-602-12WD-3k-70



FEATURES

- Full down light kit
- 50000 Hours

| CODE | LUMME-602-12WD-3k-70 |
|-------------------|----------------------------------|
| APPLICATION | Interior |
| WATTAGE | 12W |
| WORKING VOLTAGE | 240V |
| SIZE OF UNIT | 88mm x 83mm |
| INSTALLATION | Recess |
| LED TYPE | COB Cree |
| COLOR TEMPERATURE | 3000K(WW)- 4000K(NW) |
| LUMEN | 986LM |
| FINISH | Deep Black Recess & White finish |
| MATERIALS | Aluminum + PMMA |
| DRIVER | SAA Approved |
| CRI | >83 |
| PLUG | 2 Pin plug + 1.2m |
| IP | IP44 |



DOWN LIGHTS

LUMME-DL56 (project light)



FEATURES

- Full down light kit
- 50000 Hours

| CODE | LUMME--DL56 (project light) |
|-------------------|-----------------------------------|
| APPLICATION | Interior |
| WATTAGE | 6W 9W 12W 15W |
| WORKING VOLTAGE | 240V |
| SIZE OF UNIT | 105mm x 85mm |
| INSTALLATION | Recess |
| LED TYPE | COB Cree |
| COLOR TEMPERATURE | 3000K(WW) - 4000K(NW) - 5000K(CW) |
| LUMEN | 986LM |
| FINISH | White/Black |
| MATERIALS | Aluminum + Reflector |
| DRIVER | SAA Approved |
| CRI | >83 or >90 |
| IP | IP54 |





EXTENSION PLATE

LUMME-PLATE-140mm



| | |
|--------------|-----------------------------|
| CODE | LUMME-PLATE-140mm |
| APPLICATION | Suit for DL22 / DL59 / DL17 |
| SIZE OF UNIT | 140mm |
| INNER SIZE | 110mm |
| INSTALLATION | Surface mount |
| FINISH | White |
| MATERIALS | Aluminum |



FEATURES

- Extension plate to suit DL22 DL59 DL17

EXTENSION PLATE

LUMME-PLATE-170mm



| | |
|--------------|-----------------------------|
| CODE | LUMME-PLATE -170mm |
| APPLICATION | Suit for DL22 / DL59 / DL17 |
| SIZE OF UNIT | 170mm |
| INNER SIZE | 120mm |
| INSTALLATION | Surface mount |
| FINISH | White |
| MATERIALS | Aluminum |




FEATURES

- Extension plate to suit DL22 DL59 DL17

INTERIOR DIMMER

LUMME-DIMMER-150W



| | |
|----------------|---------------------------------------|
| CODE | LUMME-DIMMER-150w |
| APPLICATION | Push button dimmer insert 10 - 350 VA |
| SIZE OF UNIT | 42mm x23mm |
| VOLTAGE | AC 220-240 V ~, 50 Hz |
| WATTAGE | 5-150w (1-15 LED) |
| CERTIFICATION | SAA |
| DIMMING METHOD | Trailing Edge Phase Control |

FEATURES

- Trailing Edge Phase Control



INTERIOR DIMMER

LUMME-DIMMER-400W



| | |
|----------------|-------------------------|
| CODE | LUMME-DIMMER-400w |
| APPLICATION | Dimmer insert 200VA |
| SIZE OF UNIT | 57mm x23mm |
| VOLTAGE | AC 220-240 V ~, 50 Hz |
| WATTAGE | 5-400w (1-40 LED) |
| CERTIFICATION | SAA |
| DIMMING METHOD | Universal Phase Control |

FEATURES

- Universal Phase Control





INTERIOR OYSTER

LUMME-OL-25W-3K/5K



| CODE | LUMME-OL-25W-3K/5K |
|-------------------|-----------------------|
| APPLICATION | Interior |
| WATTAGE | 25W |
| WORKING VOLTAGE | AC200-240V |
| SIZE OF UNIT | 350mm x 110mm |
| INSTALLATION | Surface mount |
| LED TYPE | Samsung |
| COLOR TEMPERATURE | 3000K - 5000K(WW/CW) |
| LUMEN | 2000LM - 2100LM |
| FINISH | Chrome trim |
| MATERIALS | Aluminum + PMMA |
| DRIVER | SAA Approved |
| CRI | >83 |
| IP | IP44 |

FEATURES

- Life time 40000 Hours



INTERIOR OYSTER

LUMME-OL-25WD-3K



| CODE | LUMME-OL-25WD-4K |
|-------------------|------------------|
| APPLICATION | Interior |
| WATTAGE | 25W |
| WORKING VOLTAGE | AC200-240V |
| SIZE OF UNIT | 350mm x 110mm |
| INSTALLATION | Surface mount |
| LED TYPE | Samsung |
| COLOR TEMPERATURE | 3000K (WW) |
| LUMEN | 2000LM |
| FINISH | Chrome trim |
| MATERIALS | Aluminum + PMMA |
| DRIVER | SAA Approved |
| CRI | >83 |
| IP | IP44 |

FEATURES

- Life time 40000 Hours





INTERIOR OYSTER

LUMME-OL-12W-3K-5K-EMERGENCY



FEATURES

- Emergency function
- Smart IC control, self-test after luminary is connected to mains for continued 24 hours
- Emergency function switches automatically between power cut and power restoration
- LI battery, high efficiency
- Battery duration 3 hours at 4W
- Charge period 24 hours
- Life time 40000 Hours

| CODE | LED-OL-12W-3K-5K-EMERGENCY |
|-------------------|----------------------------|
| APPLICATION | Interior |
| WATTAGE | 12W |
| WORKING VOLTAGE | AC200-240V |
| SIZE OF UNIT | 250mm x 48mm |
| INSTALLATION | Surface mount |
| LED TYPE | Samsung SMD |
| COLOR TEMPERATURE | 3000K - 5000K (WW/CW) |
| LUMEN | 996LM - 1068LM |
| FINISH | White |
| MATERIALS | Aluminum + PC |
| DRIVER | SAA Approved |
| CRI | >83 |
| IP | IP54 |



INTERIOR OYSTER


LUMME-OL-15W-3K/5K



| CODE | LUMME-OL-15W-3K/4K/5K |
|-------------------|-----------------------|
| APPLICATION | Interior |
| WATTAGE | 15W |
| WORKING VOLTAGE | AC200-240V |
| SIZE OF UNIT | 275mm x 100mm |
| INSTALLATION | Surface mount |
| LED TYPE | Samsung |
| COLOR TEMPERATURE | 3000K - 5000K |
| LUMEN | 1300LM - 1350LM |
| FINISH | Chrome trim |
| MATERIALS | Aluminum + PMMA |
| DRIVER | SAA Approved |
| CRI | >83 |
| IP | IP44 |

FEATURES

- Life time 40000 Hours





INTERIOR OYSTER

LUMME-OL-15WD-4K



| CODE | LUMME-OL-15WD-4K |
|-------------------|------------------|
| APPLICATION | Interior |
| WATTAGE | 15W |
| WORKING VOLTAGE | AC200-240V |
| SIZE OF UNIT | 275mm x 100mm |
| INSTALLATION | Surface mount |
| LED TYPE | Samsung |
| COLOR TEMPERATURE | 4000K (NW) |
| LUMEN | 1350LM |
| FINISH | White |
| MATERIALS | Aluminum + PMMA |
| DRIVER | SAA Approved |
| CRI | >83 |
| IP | IP20 |

FEATURES

- Life time 40000 Hours



INTERIOR OYSTER

LUMME-OL-15W-3K/5K



| CODE | LUMME-OL-15W-3K/5K |
|-------------------|--------------------|
| APPLICATION | Interior |
| WATTAGE | 15W |
| WORKING VOLTAGE | AC200-240V |
| SIZE OF UNIT | 275mm x 100mm |
| INSTALLATION | Surface mount |
| LED TYPE | Samsung |
| COLOR TEMPERATURE | 3000K-5000K |
| LUMEN | 1300LM-1350LM |
| FINISH | White |
| MATERIALS | Aluminum + PMMA |
| DRIVER | SAA Approved |
| CRI | >83 |
| IP | IP20 |

FEATURES

- Life time 40000 Hours





INTERIOR OYSTER

LUMME-OL-25W-3K/5K



| CODE | LUMME-OL-25W-3K/5K |
|-------------------|-----------------------|
| APPLICATION | Interior |
| WATTAGE | 25W |
| WORKING VOLTAGE | AC200-240V |
| SIZE OF UNIT | 350mm x 110mm |
| INSTALLATION | Surface mount |
| LED TYPE | Samsung |
| COLOR TEMPERATURE | 3000K - 5000K (WW/CW) |
| LUMEN | 2000LM - 2100LM |
| FINISH | White |
| MATERIALS | Aluminum + PMMA |
| DRIVER | SAA Approved |
| CRI | >83 |
| IP | IP20 |

FEATURES

- Life time 40000 Hours



INTERIOR OYSTER

LUMME-OL-25WD-4K



| CODE | LUMME-OL-25WD-4K |
|-------------------|------------------|
| APPLICATION | Interior |
| WATTAGE | 25W |
| WORKING VOLTAGE | AC200-240V |
| SIZE OF UNIT | 350mm x 110mm |
| INSTALLATION | Surface mount |
| LED TYPE | Samsung |
| COLOR TEMPERATURE | 4000K |
| LUMEN | 2000LM - 2100LM |
| FINISH | White |
| MATERIALS | Aluminum + PMMA |
| DRIVER | SAA Approved |
| CRI | >83 |
| IP | IP20 |

FEATURES

- Life time 40000 Hours





INTERIOR WALL LIGHTS

LUMME-LW0001-2W-3K/4K



| | |
|-------------------|-------------------------|
| CODE | LUMME-LW0001-2W-3K/4K |
| APPLICATION | Interior |
| WATTAGE | 2W |
| WORKING VOLTAGE | AC240 |
| SIZE OF UNIT | 70mm x 70mm x 18.6mm |
| INSTALLATION | Recess |
| LED TYPE | N/A |
| COLOR TEMPERATURE | 3000K (WW) - 4000 K(NW) |
| LUMEN | 100LM (WW) - 120LM (NW) |
| FINISH | White |
| MATERIALS | Aluminum 6063 |
| DRIVER | SAA Approved |
| IP | IP44 |

FEATURES

- Custom powder coated



INTERIOR WALL LIGHTS

LUMME-LW0002-4W-3K/4K



| | |
|-------------------|-------------------------|
| CODE | LUMME-LW0002-4W-3K/4K |
| APPLICATION | Interior |
| WATTAGE | 4W |
| WORKING VOLTAGE | AC240 |
| SIZE OF UNIT | 110mm x 70mm x 25.6mm |
| INSTALLATION | Recess |
| LED TYPE | N/A |
| COLOR TEMPERATURE | 3000K (WW) - 4000K (NW) |
| LUMEN | 200LM - 250LM |
| FINISH | White |
| MATERIALS | Aluminum 6063 |
| DRIVER | SAA Approved |
| IP | IP54 |

FEATURES

- Custom powder coated





INTERIOR WALL LIGHTS


LUMME-LW0003-6W-3K/4K



| | |
|-------------------|-------------------------|
| CODE | LUMME-LW0003-6W-3K/4K |
| APPLICATION | Interior |
| WATTAGE | 6W |
| WORKING VOLTAGE | AC240 |
| SIZE OF UNIT | 200mm x 70mm x 25.6mm |
| INSTALLATION | Recess |
| LED TYPE | N/A |
| COLOR TEMPERATURE | 3000K (WW) - 4000K (NW) |
| LUMEN | 300LM - 350LM |
| FINISH | White |
| MATERIALS | Aluminum 6063 |
| DRIVER | SAA Approved |
| IP | IP44 |


FEATURES

- Cut out size 187mm x 60mm
- Custom powder coated



INTERIOR WALL LIGHTS


LUMME-WL-SA-6W

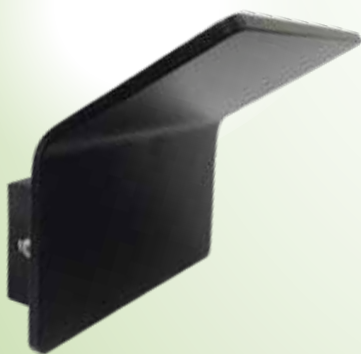

| | |
|-------------------|----------------------|
| CODE | LUMME-WL-SA-6W-B/W |
| APPLICATION | Interior |
| WATTAGE | 6W |
| WORKING VOLTAGE | AC240 |
| SIZE OF UNIT | 150mm x 140mm x 75mm |
| INSTALLATION | Surface mount |
| LED TYPE | Cree |
| COLOR TEMPERATURE | 3000K |
| LUMEN | 420LM |
| FINISH | Black / White |
| MATERIALS | Aluminum 6063 |
| DRIVER | SAA Approved |
| IP | IP44 |

FEATURES

- Custom powder coated





GLOBE LIGHTS

LUMME-GB-6W-3K/6K



FEATURES

- For interior and exterior use
- Bayonet and screw in options
- Economical



| | |
|-------------------|-------------------|
| CODE | LUMME-GB-6W-3K/6K |
| APPLICATION | Interior |
| WATTAGE | 6W |
| WORKING VOLTAGE | AC85-265V |
| SIZE OF UNIT | 65mm x 115mm |
| COLOR TEMPERATURE | 3000K - 6000K |
| LUMEN | 100LM |
| CRI | >80 |

GLOBE LIGHTS

LUMME-GB-8W-3K/6K



FEATURES

- For interior and exterior use
- Bayonet and screw in options
- Economical



| | |
|-------------------|-------------------|
| CODE | LUMME-GB-8W-3K/6K |
| APPLICATION | Interior |
| WATTAGE | 8W |
| WORKING VOLTAGE | AC85-265V |
| SIZE OF UNIT | 65mm x 115mm |
| COLOR TEMPERATURE | 3000K - 6000K |
| LUMEN | 100LM |
| CRI | >80 |

GLOBE LIGHTS

LUMME-GB-B22-12W-3K/6K




FEATURES


- For interior and exterior use
- Bayonet and screw in options
- Economical



| | |
|-------------------|------------------------|
| CODE | LUMME-GB-B22-12W-3K/6K |
| APPLICATION | Interior |
| WATTAGE | 12W |
| WORKING VOLTAGE | AC85-265V |
| SIZE OF UNIT | 70mm x 125mm |
| COLOR TEMPERATURE | 3000K - 6000K |
| LUMEN | 100LM |
| CRI | >80 |




Spot lights



Strip lights



Hibay lights



Track lights



Scoop lights



Down lights



The Lumme range of LED lighting has an option to suit your commercial, industrial or residential needs.



WWW.SIGNAGES.COM.AU





BATTEN LIGHTS

LUMME-BAT-20W



FEATURES

- Surface mounted, suspended
- Terminal block PA16



| CODE | LUMME-BAT-20W |
|-------------------|---------------------------|
| APPLICATION | Interior |
| WATTAGE | 20W |
| SIZE OF UNIT | 600mm x 80mm x 65mm |
| INSTALLATION | Surface mount |
| COLOR TEMPERATURE | 4000K - 6000K |
| LUMEN | 1900LM - 2000LM |
| FINISH | White |
| MATERIALS | Aluminum + PC + Steel |
| DRIVER | Lifud driver SAA Approved |
| IP | IP44 |

BATTEN LIGHTS

LUMME-BAT-40W



FEATURES

- Surface mounted, suspended
- Terminal block PA16



| CODE | LUMME-BAT-40W |
|-------------------|---------------------------|
| APPLICATION | Interior |
| WATTAGE | 40W |
| SIZE OF UNIT | 600mm x 80mm x 65mm |
| INSTALLATION | Surface mount / Suspended |
| COLOR TEMPERATURE | 4000K - 6000K |
| LUMEN | 3800LM - 4000LM |
| FINISH | White |
| MATERIALS | Aluminum + PC + Steel |
| DRIVER | Lifud driver SAA approved |
| IP | IP44 |

Why Switch to LED?



Eco Friendly

LED lights do not contain mercury or other harmful gases. They are designed to be 100% recyclable.



Rapid Brightening

LED lights switch on at their intended brightness every single time and throughout their lifetime.



Energy Saving

LED Lights use 85% less electricity than standard halogen lights use.



Durable Quality

LED lights have no filaments therefore can withstand more shocks than traditional bulbs.



Long Lifespan

LED lights can last up to 40,000 hours, over 8-10 times longer than a traditional bulb.



TUBE LIGHTS

LUMME-T8-10W-600mm



FEATURES

- Surface mounted, suspended
- Terminal block PA16



| | |
|-------------------|-------------------------|
| CODE | LUMME-T8-10W-600mm |
| APPLICATION | Interior |
| WATTAGE | 10W |
| WORKING VOLTAGE | AC240 |
| SIZE OF UNIT | 600mm |
| COLOR TEMPERATURE | 4000K (NW) - 6000K (CW) |
| LUMEN | 800LM |

TUBE LIGHTS

LUMME-T8-12W-900mm



FEATURES

- Surface mounted, suspended
- Terminal block PA16



| | |
|-------------------|--------------------|
| CODE | LUMME-T8-12W-900mm |
| APPLICATION | Interior |
| WATTAGE | 12W |
| WORKING VOLTAGE | AC240 |
| SIZE OF UNIT | 900mm |
| COLOR TEMPERATURE | 4000K |
| LUMEN | 900LM / 6K |

TUBE LIGHTS

LUMME-T8-15W-1200mm



FEATURES

- Surface mounted, suspended
- Terminal block PA16



| | |
|-------------------|---------------------|
| CODE | LUMME-T8-15W-1200mm |
| APPLICATION | Interior |
| WATTAGE | 15W |
| WORKING VOLTAGE | AC240 |
| SIZE OF UNIT | 1200mm |
| COLOR TEMPERATURE | 6000K |
| LUMEN | 1500LM 6K / 3K |



TUBE LIGHTS

LUMME-T8-18W-1200mm



FEATURES

- Surface mounted, suspended
- Terminal block PA16



| | |
|-------------------|---------------------|
| CODE | LUMME-T8-18W-1200mm |
| APPLICATION | Interior |
| WATTAGE | 18W |
| WORKING VOLTAGE | AC240 |
| SIZE OF UNIT | 1200mm |
| COLOR TEMPERATURE | 6000K |
| LUMEN | 1800LM |

TUBE LIGHTS

LUMME-T8-20W-1200mm



FEATURES

- Surface mounted, suspended
- Terminal block PA16



| | |
|-------------------|---------------------|
| CODE | LUMME-T8-20W-1200mm |
| APPLICATION | Interior |
| WATTAGE | 20W |
| WORKING VOLTAGE | AC240 |
| SIZE OF UNIT | 1200mm |
| COLOR TEMPERATURE | 3000 / 4000 / 6000K |
| LUMEN | 2000LM |

TUBE LIGHTS

LUMME-T8-23W-1500mm



FEATURES

- Surface mounted, suspended
- Terminal block PA16



| | |
|-------------------|---------------------|
| CODE | LUMME-T8-23W-1500mm |
| APPLICATION | Interior |
| WATTAGE | 23W |
| WORKING VOLTAGE | AC240 |
| SIZE OF UNIT | 1500mm |
| COLOR TEMPERATURE | 6000K |
| LUMEN | 2300LM |



TUBE LIGHTS - FITTINGS

LUMME-T8fitt-1200-IP44-S



FEATURES

- Materials, metal with PC diffuse
- Light tubes not included



| | |
|-----------------|--------------------------|
| CODE | LUMME-T8fitt-1200-IP44-S |
| APPLICATION | Interior |
| WATTAGE | 15W /18W LED tube |
| WORKING VOLTAGE | AC240 |
| SIZE OF UNIT | 1225mm x 126mm x 50mm |
| LUMEN | 1500LM - 1800LM |
| IP | IP44 |

TUBE LIGHTS - FITTINGS

LUMME-T8fitt-1200-IP44-D



FEATURES

- Materials, metal with PC diffuse
- Light tubes not included



| | |
|-----------------|----------------------------|
| CODE | LUMME-T8fitt-1200-IP44-D |
| APPLICATION | Interior |
| WATTAGE | 2 x 15W /2 x 18W LED tubes |
| WORKING VOLTAGE | AC240 |
| SIZE OF UNIT | 1225mm x 126mm x 50mm |
| LUMEN | 3000LM - 3600LM |
| IP | IP44 |


TUBE LIGHTS - FITTINGS

LUMME-T8fitt-1200-IP20-S




FEATURES

- Light tubes not included




| | |
|-----------------|--------------------------|
| CODE | LUMME-T8fitt-1200-IP20-S |
| APPLICATION | Interior |
| WATTAGE | 15W /18W LED tube |
| WORKING VOLTAGE | AC240 |
| SIZE OF UNIT | 1255mm x 59mm x 39mm |
| BASE SIZE | T8 |
| MATERIALS | Metal |
| IP | IP20 |

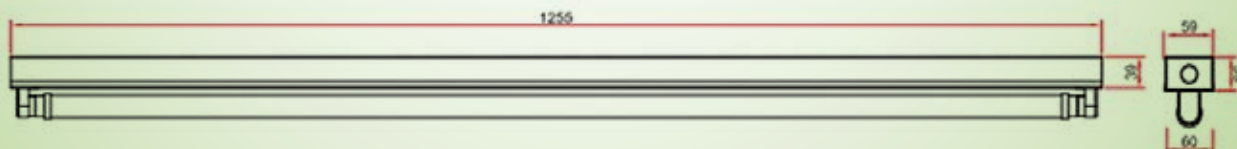

FITTINGS

LUMME-T8 STARTER



| | |
|-------------|--|
| CODE | LUMME-STARTER |
| APPLICATION | LED starter Fuse to replace existing Fluorescent starter |



TUBE LIGHTS - FITTINGS

LUMME-T8fitt-1200-IP65-S



FEATURES

- 1.2m Flex and Plug
- Light tubes not included



| | |
|-----------------|------------------------------|
| CODE | LUMME-T8fitt-1200-IP65-S |
| APPLICATION | Interior & Exterior (single) |
| WATTAGE | 15W /18W LED tube |
| WORKING VOLTAGE | AC240, 50/60Hz |
| SIZE OF UNIT | 1250mm x 80mm x 90mm |
| LUMEN | 1500LM - 1800LM |
| MATERIALS | PC Clear Cover |
| IP | IP65 |


TUBE LIGHTS - FITTINGS

LUMME-T8fitt-1200-IP65-D



FEATURES

- 1.2m Flex and Plug
- Light tubes not included



| | |
|-----------------|------------------------------|
| CODE | LUMME-T8fitt-1200-IP65-D |
| APPLICATION | Interior & Exterior (double) |
| WATTAGE | 2 x 15W /2 x 18W LED tubes |
| WORKING VOLTAGE | AC240, 50/60Hz |
| SIZE OF UNIT | 1252mm x 80mm x 90mm |
| LUMEN | 3000LM - 3600LM |
| MATERIALS | PC Clear Cover |
| IP | IP65 |


TUBE LIGHTS

LUMME-T5-18W-6K-1200MM



FEATURES

- Complete set



| | |
|-----------------|------------------------|
| CODE | LUMME-T5-18W-6K-1200MM |
| APPLICATION | Interior |
| WATTAGE | 18W |
| WORKING VOLTAGE | AC240 |
| SIZE OF UNIT | 1200mm |
| LUMEN | 1800LM |
| IP | IP20 |

TUBE LIGHTS

LUMME-T5-8W-6K-600MM



FEATURES

- Complete set



| | |
|-----------------|----------------------|
| CODE | LUMME-T5-8W-6K-600MM |
| APPLICATION | Interior |
| WATTAGE | 10W |
| WORKING VOLTAGE | AC240 |
| SIZE OF UNIT | 600mm |
| LUMEN | 1000LM |
| IP | IP20 |



FLOOD LIGHT EXTERIOR

LUMME-FL-30W-6K-SMD



FEATURES

- Sensor option
- Portable



| CODE | LUMME-FL-30W-6K-SMD |
|-------------------|-------------------------|
| APPLICATION | Exterior |
| WATTAGE | 30W |
| WORKING VOLTAGE | AC240V |
| SIZE OF UNIT | 195mm x 278mm x 62.3mm |
| INSTALLATION | Surface mount |
| LED TYPE | SMD |
| COLOR TEMPERATURE | 3000K (WW) - 6000K (CW) |
| LUMEN | 3000LM |
| FINISH | Black |
| MATERIALS | Aluminum + Glass |
| DRIVER | SAA Driver |
| CRI | >70 |
| PLUG | 3 Pin plug + 1.2m |
| IP | IP65 |

FLOOD LIGHT EXTERIOR

LUMME-FL-50W -SMD



FEATURES

- Sensor option
- Portable



| CODE | LUMME-FL-50W-SMD |
|-------------------|----------------------------|
| APPLICATION | Exterior |
| WATTAGE | 50W |
| WORKING VOLTAGE | AC240V |
| SIZE OF UNIT | 235.5mm x 361.5mm x 69.5mm |
| INSTALLATION | Surface mount |
| LED TYPE | SMD |
| COLOR TEMPERATURE | 3000K (WW) - 6000K (CW) |
| LUMEN | 5000LM |
| FINISH | Black |
| MATERIALS | Aluminum + Glass |
| DRIVER | SAA Driver |
| CRI | >70 |
| PLUG | 3 Pin plug + 1.2m |
| IP | IP65 |



FLOOD LIGHT EXTERIOR

LUMME-FL-100W-6K-SMD




| CODE | LUMME-FL-100W-6K-SMD |
|-------------------|-------------------------|
| APPLICATION | Exterior |
| WATTAGE | 100W |
| WORKING VOLTAGE | AC240V |
| SIZE OF UNIT | 285.98 x 437.99 x 101mm |
| INSTALLATION | Surface mount |
| LED TYPE | SMD |
| COLOR TEMPERATURE | 6000K (CW) |
| LUMEN | 10000LM |
| FINISH | Grey body |
| MATERIALS | Aluminum + Glass |
| DRIVER | SAA driver |
| CRI | >70 |
| PLUG | 3 Pin plug + 1.2m |
| IP | IP65 |



FLOOD LIGHT EXTERIOR

LUMME-FL-150W-4K-6K-SMD

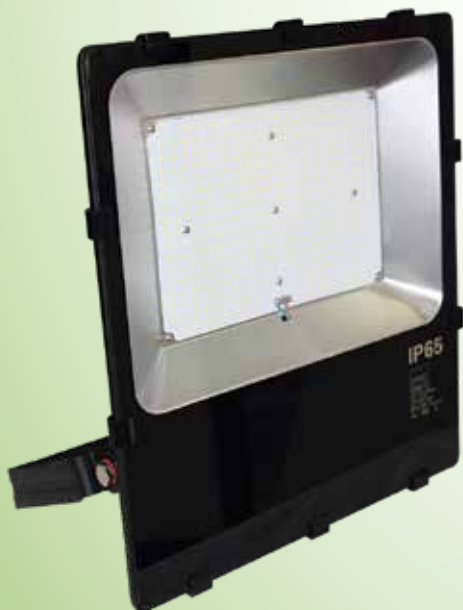

| CODE | LUMME-FL-150W-4K-6K-SMD |
|-------------------|---------------------------|
| APPLICATION | Exterior |
| WATTAGE | 150W |
| WORKING VOLTAGE | AC240V |
| SIZE OF UNIT | 364.29 x 506.14 x 108.5mm |
| INSTALLATION | Surface mount |
| LED TYPE | SMD |
| COLOR TEMPERATURE | 3000K (WW) - 6000K (CW) |
| LUMEN | 15000LM - 15100LM |
| FINISH | Grey body |
| MATERIALS | Aluminum + Glass |
| DRIVER | SAA driver |
| CRI | >70 |
| PLUG | 3 Pin plug + 1.2m |
| IP | IP65 |





FLOOD LIGHT EXTERIOR

LUMME-FL-30W-RGB



| CODE | LUMME-FL-30W-RGB |
|-------------------|------------------------|
| APPLICATION | Exterior |
| WATTAGE | 30W |
| WORKING VOLTAGE | AC240V |
| SIZE OF UNIT | 195mm x 278mm x 62.3mm |
| INSTALLATION | Surface mount |
| LED TYPE | RGB |
| COLOR TEMPERATURE | 90LM |
| LUMEN | 1500LM |
| FINISH | Black |
| MATERIALS | Aluminum + Glass |
| DRIVER | SAA driver |
| CRI | >70 |
| PLUG | 3 Pin plug + 1.2m |
| IP | IP65 |



FLOOD LIGHT EXTERIOR

LUMME-FL-50W-RGB



| CODE | LUMME-FL-50W-RGB |
|-------------------|------------------------|
| APPLICATION | Exterior |
| WATTAGE | 50W |
| WORKING VOLTAGE | AC240V |
| SIZE OF UNIT | 235.5 x 361.5 x 69.5mm |
| INSTALLATION | Surface mount |
| LED TYPE | Epistar |
| COLOR TEMPERATURE | RGB |
| LUMEN | 3500LM |
| FINISH | Black |
| MATERIALS | Aluminum + Glass |
| DRIVER | SAA driver |
| CRI | >70 |
| PLUG | 3 Pin plug + 1.2m |
| IP | IP65 |






FLOOD LIGHT EXTERIOR

LUMME-FLAC-B1-800

FEATURES

- Billboard bar wall mount or light mount

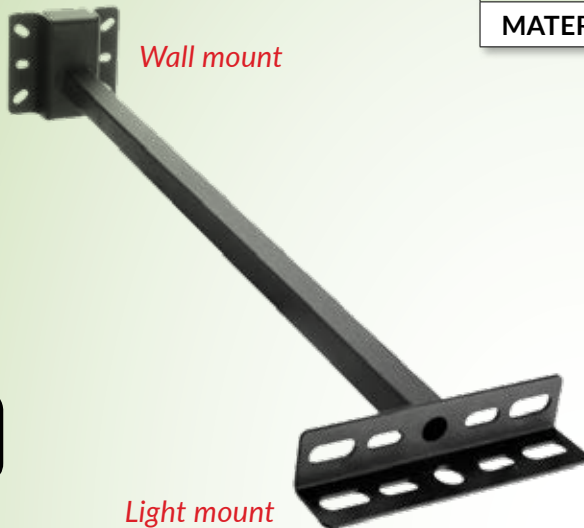

30W-
150W
WATTAGE


| CODE | LUMME-FLAC-B1-800 |
|--------------|-------------------|
| APPLICATION | Exterior |
| WATTAGE | 30W - 150W |
| SIZE OF UNIT | 800mm |
| INSTALLATION | Surface mount |
| FINISH | Black |
| MATERIALS | Metal |

FLOOD LIGHT EXTERIOR

LUMME-FLAC-B2-800

FEATURES

- Billboard bar wall mount or light mount

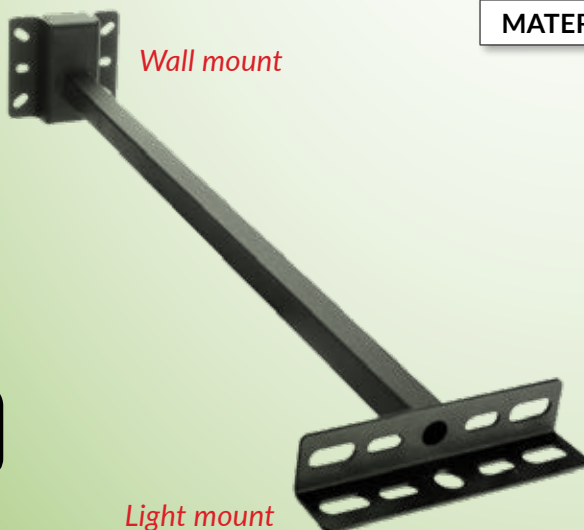

100W-
150W
WATTAGE

| CODE | LUMME-Flac-B2-800 |
|--------------|--------------------|
| APPLICATION | Exterior |
| WATTAGE | 100W - 150W |
| SIZE OF UNIT | 800mm |
| INSTALLATION | Surface mount |
| FINISH | Black |
| MATERIALS | Metal - Heavy duty |



WALL LIGHT EXTERIOR

LUMME-WL-1-8W-3K/4K



| CODE | LUMME-WL-1-8W-3K/4K |
|-------------------|---------------------|
| APPLICATION | Exterior |
| WATTAGE | 8w |
| WORKING VOLTAGE | AC100-240V |
| SIZE OF UNIT | 76mm x 133mm |
| INSTALLATION | Surface mount |
| LED TYPE | COB Sharp |
| COLOR TEMPERATURE | 3000K - 4000K |
| LUMEN | 650LM - 750LM |
| FINISH | Black |
| MATERIALS | PC |
| CRI | >80 |
| IP | IP65 |

FEATURES

- Double head
- COB sharp light source



WALL LIGHT EXTERIOR


LUMME-WL-1-13W-3K-4K



| CODE | LUMME-WL-1-13W-3K-4K |
|-------------------|----------------------|
| APPLICATION | Exterior |
| WATTAGE | 13W |
| WORKING VOLTAGE | AC100-240V |
| SIZE OF UNIT | 76mm x 133mm |
| INSTALLATION | Surface mount |
| LED TYPE | COB Sharp |
| COLOR TEMPERATURE | 3000K - 4000K |
| LUMEN | 1100LM- 1150LM |
| FINISH | Black |
| MATERIALS | PC + Powder coat |
| CRI | >80 |
| IP | IP65 |

FEATURES

- Double head
- COB sharp light source





WALL LIGHT EXTERIOR


LUMME-WL-2-16W-3K/4K



| CODE | LUMME-WL-2-16W-3K/4K |
|-------------------|----------------------|
| APPLICATION | Exterior |
| WATTAGE | 16W |
| WORKING VOLTAGE | AC100-240V |
| SIZE OF UNIT | 76mm x 133mm |
| INSTALLATION | Surface mount |
| LED TYPE | COB Sharp |
| COLOR TEMPERATURE | 3000K - 4000K |
| LUMEN | 1300LM - 1550LM |
| FINISH | Black |
| MATERIALS | PC |
| CRI | >80 |
| IP | IP65 |

FEATURES

- Double head
- COB sharp light source



WALL LIGHT EXTERIOR


LUMME-WL-2-26W-3K/4K



| CODE | LUMME-WL-2-26W-3K/4K |
|-------------------|----------------------|
| APPLICATION | Exterior |
| WATTAGE | 26W |
| WORKING VOLTAGE | AC100-240V |
| SIZE OF UNIT | 76mm x 133mm |
| INSTALLATION | Surface mount |
| LED TYPE | COB Sharp |
| COLOR TEMPERATURE | 3000K - 4000K |
| LUMEN | 2100LM - 2300LM |
| FINISH | Black |
| MATERIALS | PC |
| CRI | >80 |
| IP | IP65 |

FEATURES

- Double head
- COB sharp light source





WALL LIGHT EXTERIOR

LUMME-WL1.5W-3K/6K-BLK-SOLAR



FEATURES

- Solar Panel 1.5W Mono-crystalline Solar Panel
- Battery Lithium, 3.7V/1200mAh, 12mth life
- Charging Time 5-6 hours
- Working Time 3 nights
- Sensing Range 6m
- Sensing delay time 10 Second
- Weight 0.23kg

| CODE | LUMME-WL1.5W-3K/6K-SOLAR |
|-------------------|--------------------------|
| APPLICATION | Exterior |
| WATTAGE | 1.5W |
| WORKING VOLTAGE | AC100-240V |
| SIZE OF UNIT | 152 x 96 x 3.4mm |
| INSTALLATION | Surface mount |
| LED TYPE | SMD2835 |
| COLOR TEMPERATURE | 3000K - 6000k |
| LUMEN | 150LM |
| FINISH | Black |
| MATERIALS | PC + Powder coat |
| CRI | >80 |
| IP | IP65 |



WALL LIGHT EXTERIOR


LUMME-WL1.5W-3K/6K-WHT-SOLAR



FEATURES

- Solar Panel 1.5W Mono-crystalline Solar Panel
- Battery Lithium, 3.7V/1200mAh, 12mth life
- Charging Time 5-6 hours
- Working Time 3 nights
- Sensing Range 6m
- Sensing delay time 10 Second
- Weight 0.23kg

| CODE | LUMME-WL1.5W-3K/6K-SOLAR |
|-------------------|--------------------------|
| APPLICATION | Exterior |
| WATTAGE | 1.5W |
| WORKING VOLTAGE | AC100-240V |
| SIZE OF UNIT | 152 mm x 96mm x 83.4mm |
| INSTALLATION | Surface mount |
| LED TYPE | SMD2835 |
| COLOR TEMPERATURE | 3000K - 6000K |
| LUMEN | 150LM |
| FINISH | Black |
| MATERIALS | PC + Powder coat |
| CRI | >80 |
| IP | IP65 |





WALL LIGHT EXTERIOR

LUMME-WL3.2W-3K/6K SOLAR



FEATURES

- Solar Panel 3.2w Mono-Crystalline Solar Panel
- Battery Lithium, 3.7V/2000mAh, 12mth life
- Charging Time 5-6 hours
- Working Time 3 Nights
- Sensing Range 6m
- Sensing delay time 10 Second
- Weight 0.35kg



| CODE | LUMME-WL3.2W-3K/6K-SOLAR |
|-------------------|--------------------------|
| APPLICATION | Exterior |
| WATTAGE | 3.2W |
| WORKING VOLTAGE | AC100-240V |
| SIZE OF UNIT | 145mm x 221mm x 109mm |
| INSTALLATION | Surface mount |
| LED TYPE | SMD2835 |
| COLOR TEMPERATURE | 3000K - 6000K |
| LUMEN | 400LM |
| FINISH | Black, White or Silver |
| MATERIALS | PC + Powder coat |
| CRI | >80 |
| IP | IP65 |


WALL LIGHT EXTERIOR

LUMME-WL6.8W-3K/6K SOLAR



FEATURES

- Solar Panel 4.4W Mono-Crystalline Solar Panel
- Battery Lithium, 3.7V/12000mAh, 12mth life
- Charging Time 5-6 hours
- Working Time 3 Nights
- Sensing Range 10 - 15m
- Sensing delay time 10 Second
- Weight 0.85kg



| CODE | LUMME-WL6.8W-3K/6K-SOLAR |
|-------------------|--------------------------|
| APPLICATION | Exterior |
| WATTAGE | 6.8W |
| WORKING VOLTAGE | AC100-240V |
| SIZE OF UNIT | 270mm x 221mm x 109mm |
| INSTALLATION | Surface mount |
| LED TYPE | SMD2835 |
| COLOR TEMPERATURE | 3000K - 6000K |
| LUMEN | 800LM |
| FINISH | Black or White |
| MATERIALS | PC + Powder coat |
| CRI | >80 |
| IP | IP65 |




PAR LIGHT EXTERIOR

LUMME-PAR30-13W-3K/5K



| CODE | LUMME-PAR30-13W-3K/5K |
|-------------------|-----------------------|
| APPLICATION | Interior |
| WATTAGE | 13W |
| WORKING VOLTAGE | AC100-240V |
| SIZE OF UNIT | 95mm x 115mm |
| INSTALLATION | Recess |
| LED TYPE | COB Sharp |
| COLOR TEMPERATURE | 3000K - 5000K |
| LUMEN | 1000LM - 1100LM |
| FINISH | Grey |
| MATERIALS | PC + Powder coat |
| DRIVER | EMC Driver |
| CRI | >80 |
| IP | IP20 |




PAR LIGHT EXTERIOR

LUMME-PAR38-18W-3K/5K



| CODE | LUMME-PAR38-18W-3K/5K |
|-------------------|-----------------------|
| APPLICATION | Interior & exterior |
| WATTAGE | 18W |
| WORKING VOLTAGE | AC100-240V |
| SIZE OF UNIT | 120mm x 146mm |
| INSTALLATION | Recess |
| LED TYPE | COB Sharp |
| COLOR TEMPERATURE | 3000K - 5000K |
| LUMEN | 1450LM- 1550LM |
| FINISH | Grey |
| MATERIALS | PC + Powder coat |
| DRIVER | EMC Driver |
| CRI | >80 |
| IP | IP65 |





SHOP FRONT

LUMME-SF-15W-3K



FEATURES

- PC Diffuse
- Life time 40000 Hours



| CODE | LUMME-SF-15W-3K |
|-------------------|------------------|
| APPLICATION | Interior |
| WATTAGE | 15W |
| WORKING VOLTAGE | AC200-240V |
| SIZE OF UNIT | 110mm x 90mm |
| INSTALLATION | Recess |
| LED TYPE | COB |
| COLOR TEMPERATURE | 3000K |
| LUMEN | 1200LM |
| FINISH | White |
| MATERIALS | Aluminum + PC |
| DRIVER | SAA Approved |
| CRI | >83 |
| PLUG | Plug + flex 1.2m |
| IP | IP20 |

SHOP FRONT

LUMME-SF-38W-3K/4K/6K



FEATURES

- PC Diffuse
- Life time 40000 Hours



| CODE | LUMME-SF-38W |
|-------------------|-----------------------|
| APPLICATION | Interior |
| WATTAGE | 38W |
| WORKING VOLTAGE | AC200-240V |
| SIZE OF UNIT | 190mm x 190mm |
| INSTALLATION | Recess |
| LED TYPE | COB |
| COLOR TEMPERATURE | 3000K - 4000K - 6000K |
| LUMEN | 3050LM |
| FINISH | White |
| MATERIALS | Aluminum + PC |
| DRIVER | SAA Approved |
| CRI | >83 |
| PLUG | Plug + flex 1.2m |
| IP | IP20 |



SHOP FRONT

LUMME-SF-38W-3K/4K/6K-RC



| CODE | LUMME SF 38W 3K/4K/6K |
|-------------------|-----------------------|
| APPLICATION | Interior |
| WATTAGE | 38W |
| WORKING VOLTAGE | AC200-240V |
| SIZE OF UNIT | 235mm x 145mm |
| INSTALLATION | Recess |
| LED TYPE | SMD |
| COLOR TEMPERATURE | 3000K - 4000K - 6000K |
| LUMEN | 3050LM |
| FINISH | White |
| MATERIALS | Aluminum + PC |
| DRIVER | SAA Approved |
| CRI | >83 |
| PLUG | 1.2m flex + plug |
| IP | IP20 |

FEATURES

- White trim with PC defuse



SPOT LIGHT

LUMME-LR1003R02C



| CODE | Lumme-LR1003R02C |
|-------------------|---|
| APPLICATION | Interior |
| WATTAGE | 20W |
| WORKING VOLTAGE | 240V |
| SIZE OF UNIT | 55mm x 235mm |
| INSTALLATION | Ceiling Mounted |
| LED TYPE | COB CREE |
| COLOR TEMPERATURE | 3000K - 4000K - 6000K |
| LUMEN | 3000K(1600lm) 4000K(1650lm) 5000K(1700lm) |
| FINISH | White/Black |
| MATERIALS | Aluminum |
| DRIVER | Eaglerise |
| CRI | >83 or >90 |
| IP | IP20 |

FEATURES

- Life time 50000 Hours





PENDANT LIGHTS

LUMME-SP2



| | |
|-----------------|-------------------------------|
| CODE | LUMME-SP2 CY-DD-484-G1 |
| APPLICATION | Interior |
| WATTAGE | Up to 40W (Bulb not included) |
| WORKING VOLTAGE | AC 100-265V, 50-60Hz |
| SIZE OF UNIT | 250mm x 150mm |
| INSTALLATION | Surface mount |
| LED TYPE | Edison bulb (not included) |
| FINISH | Green, White or Black |
| MATERIALS | Iron |
| IP | IP20 |

FEATURES

- Choice of 3 colours
- Bulb not included



PENDANT LIGHTS

LUMME-SP3



| | |
|-----------------|--------------------------------|
| CODE | LUMME-SP3 CY-DD-407-B |
| APPLICATION | Interior |
| WATTAGE | 40W |
| WORKING VOLTAGE | AC200-240V 50/60Hz |
| SIZE OF UNIT | 700mm x 400mm |
| INSTALLATION | Surface mount |
| LED TYPE | 2 x E27, max. 40W, Edison bulb |
| FINISH | Gold or Stainless Silver |
| MATERIALS | Stainless Steel |
| IP | IP20 |

FEATURES

- Weight 3.36KG
- Complete with 2 x Edison bulbs





INTERIOR TRACK LIGHTS

LUMME-TL034-12WD



| CODE | LUMME-TL034-12WD |
|-------------------|-----------------------|
| APPLICATION | Interior |
| WATTAGE | 12W |
| WORKING VOLTAGE | AC200 - 240V 50/60Hz |
| SIZE OF UNIT | 65mm x 157mm |
| INSTALLATION | Surface mount |
| LED TYPE | Cree |
| COLOR TEMPERATURE | 3000K - 4000K - 5000K |
| LUMEN | 950LM - 970LM - 995LM |
| FINISH | Black |
| MATERIALS | Aluminum |
| CRI | >80 |
| IP | IP20 |

FEATURES

- Life time 50000 Hours
- Track connector, 2 Phase, 3-line



INTERIOR TRACK LIGHTS


LUMME-TL034-12WD



| CODE | LUMME-TL034-12WD |
|-------------------|-----------------------|
| APPLICATION | Interior |
| WATTAGE | 12W |
| WORKING VOLTAGE | AC200 - 240V 50/60Hz |
| SIZE OF UNIT | 65mm x 157mm |
| INSTALLATION | Surface mount |
| LED TYPE | Cree |
| COLOR TEMPERATURE | 3000K - 4000K - 5000K |
| LUMEN | 950LM - 970LM - 995LM |
| FINISH | White |
| MATERIALS | Aluminum |
| CRI | >80 |
| IP | IP20 |

FEATURES

- Life time 50000 Hours
- Yes C-Bus compatible option





INTERIOR TRACK LIGHTS

LUMME-TL-30W



| CODE | LUMME-TL-30W |
|-------------------|--------------------------|
| APPLICATION | Interior |
| WATTAGE | 30W |
| WORKING VOLTAGE | AC200-240V 50/60Hz |
| SIZE OF UNIT | 95mm x 145mm |
| INSTALLATION | Surface mount |
| LED TYPE | COB (Bridgelux) |
| COLOR TEMPERATURE | 3000K - 4000K - 5000K |
| LUMEN | 2515LM - 2560LM - 2590LM |
| FINISH | White |
| MATERIALS | Aluminum |
| CRI | >80 |
| IP | IP20 |


FEATURES

- 2 Phase - 3 line
- Life time 50000 Hours



INTERIOR TRACK LIGHTS

LUMME-TL-30W

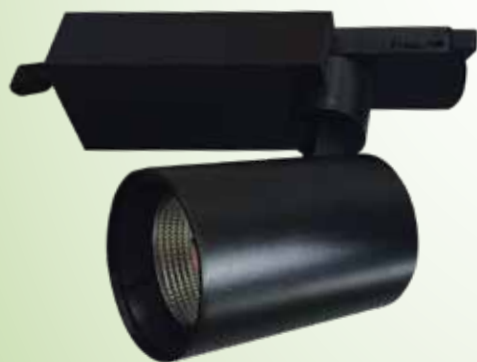

| CODE | LUMME-TL-30W |
|-------------------|--------------------------|
| APPLICATION | Interior |
| WATTAGE | 30W |
| WORKING VOLTAGE | AC200-240V 50/60Hz |
| SIZE OF UNIT | 95mm x 145mm |
| INSTALLATION | Surface mount |
| LED TYPE | COB (Bridgelux) |
| COLOR TEMPERATURE | 3000K - 4000K - 5000K |
| LUMEN | 2515LM - 2560LM - 2590LM |
| FINISH | Black |
| MATERIALS | Aluminum |
| CRI | >80 |
| IP | IP20 |

FEATURES

- 2 Phase - 3 line
- Life time 50000 Hours





INTERIOR TRACK LIGHTS

LUMME-R034-4-12W



| | |
|-------------------|-------------------------|
| CODE | LUMME-R034-4-12W- |
| APPLICATION | Interior |
| WATTAGE | 12W |
| WORKING VOLTAGE | AC200 - 240V 50/60Hz |
| SIZE OF UNIT | 85mm x 159mm |
| INSTALLATION | Recess |
| LED TYPE | Cree (COB) |
| COLOR TEMPERATURE | 3000K - 4000K - 5000K |
| LUMEN | 960LM - 1080LM - 1115LM |
| FINISH | White |
| MATERIALS | Aluminum |
| CRI | >85 |
| IP | IP20 |

FEATURES

- Life time 50000 Hours



INTERIOR TRACK LIGHTS

LUMME-TL011-2L-25W-3K



| | |
|-------------------|-----------------------|
| CODE | LUMME-TL011-2L-25W-3K |
| APPLICATION | Interior |
| WATTAGE | 25W |
| WORKING VOLTAGE | AC200-240V 50/60Hz |
| SIZE OF UNIT | 95mm x 145mm |
| INSTALLATION | Surface mount |
| LED TYPE | COB (Bridgelux) |
| COLOR TEMPERATURE | 3000K |
| LUMEN | 2500LM |
| FINISH | White/Black |
| MATERIALS | Aluminum |
| CRI | >80 |
| IP | IP20 |

FEATURES


- 2 phase-3 line
- 50000 Hours






INTERIOR TRACK RAILS

LUMME-TL3 LINETRACK-2M-WHT/BLACK

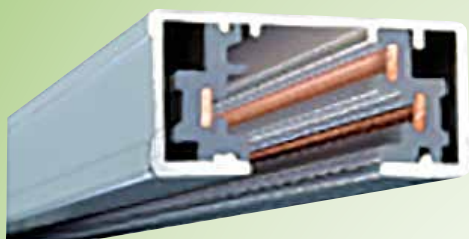

2 PHASE TRACK SYSTEM

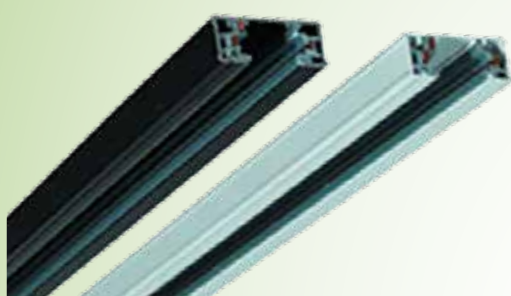


APPLICATIONS

For interior use



| CODE | LUMME-TL 3 LINETRACK-2M |
|-------------------|-------------------------|
| APPLICATION | Interior |
| WATTAGE | 18W |
| WORKING VOLTAGE | AC200 - 240V 50/60Hz |
| SIZE OF UNIT | 34.3mm x 17.8mm |
| INSTALLATION | Surface mount |
| COLOR TEMPERATURE | 3000K - 4000K (white) |
| LUMEN | 1200LM - 1250LM |
| FINISH | Black or White |
| MATERIALS | Aluminum |

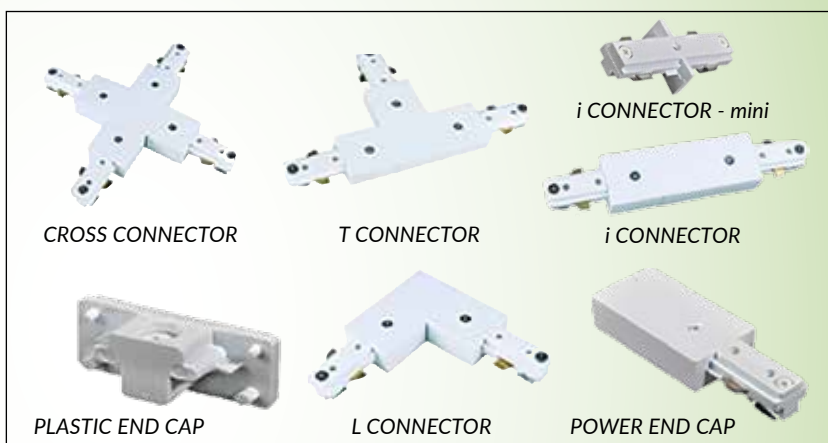

INTERIOR TRACK RAILS

LUMME-TL 4LINE TRACK-2M-WHT



3 PHASE TRACK SYSTEM

APPLICATIONS

For interior use



| CODE | LUMME-TL 4LINE TRACK-2M |
|-----------------|-------------------------|
| APPLICATION | Interior |
| WATTAGE | 25W |
| WORKING VOLTAGE | AC200 - 240V 50/60Hz |
| SIZE OF UNIT | 35.2mm x 35.5mm |
| INSTALLATION | Surface mount |
| FINISH | White |
| MATERIALS | Aluminum |



POWER END CAP



PLASTIC END CAP



LED STRIP LIGHTING

LUMME-STRIP-14.4W-5M-3K/6K



| | |
|-------------------|-------------------------|
| CODE | LUMME-ST-14.4W-5M-3K/6K |
| APPLICATION | Interior |
| WATTAGE | 14.4W |
| WORKING VOLTAGE | DC12V/24V |
| SIZE OF UNIT | 10 x 1.8 x 5000mm |
| LED TYPE | SMD5050, 60chip/m |
| COLOR TEMPERATURE | 3000K (WW) - 6000K (CW) |
| LUMEN | 1200LM |
| DRIVER | C-Tick Approved adapter |
| PLUG | 1.5m Wire |
| IP | IP20 |

LED STRIP LIGHTING

LUMME-STRIP-7.2W-5M-3K/4K/6K



| | |
|-------------------|---------------------------|
| CODE | LUMME-ST-7.2W-5M-3K/4K/6K |
| APPLICATION | Interior and Exterior |
| WATTAGE | 7.2w |
| WORKING VOLTAGE | DC12V |
| SIZE OF UNIT | 10 x 1.8 x 5000mm |
| LED TYPE | SMD5050, 30chip/m |
| COLOR TEMPERATURE | 3000K - 4000K - 6000K |
| LUMEN | 700LM |
| DRIVER | C-Tick Approved adapter |
| PLUG | 1.5m Wire |
| IP | IP65 |

LED STRIPS LIGHTING

LUMME-STRIP-RGB-5M





| | |
|-------------------|-------------------------|
| CODE | LUMME-STRIP-7.2W-5M-RGB |
| APPLICATION | Interior and Exterior |
| WATTAGE | 7.2w |
| WORKING VOLTAGE | DC12V |
| SIZE OF UNIT | 10 x 1.8 x 5000mm |
| LED TYPE | SMD5050, 30chip/m |
| COLOR TEMPERATURE | RGB (Red, Green, Blue) |
| LUMEN | 400LM |
| DRIVER | C-Tick Approved adapter |
| PLUG | 1.5m Wire |
| IP | IP65 |



STRIP LIGHTING CHANEL

LED-CHNEL-002

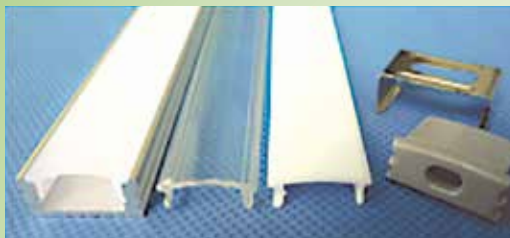



FEATURES

- Custom powder coated
- Diffuser flat (Pmma) high output frost
- Accessories end caps (Grey) and SS Clips

| | |
|--------------|------------------------|
| CODE | LED-CHNEL-002 |
| APPLICATION | Interior & Exterior |
| SIZE OF UNIT | 17.5mm X 7mm |
| INSTALLATION | Surface mount |
| FINISH | Natural Silver |
| MATERIALS | Extruded Aluminum 6063 |

STRIP LIGHTING CHANEL

LED-CHNEL-004

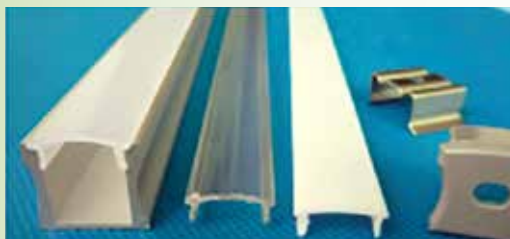


FEATURES

- Custom powder coated
- Diffuser flat (Pmma) high output frost
- Accessories end caps (Grey) and SS Clips

| | |
|--------------|------------------------|
| CODE | LED-CHNEL-004 |
| APPLICATION | Interior & Exterior |
| SIZE OF UNIT | 17.5mm x 15mm |
| INSTALLATION | Surface mount |
| FINISH | Natural Silver |
| MATERIALS | Extruded Aluminum 6063 |

STRIP LIGHTING CHANEL

LED-CHNEL-006



FEATURES

- Custom powder coated
- Diffuser flat (Pmma) high output frost
- Accessories end caps (Grey) and SS Clips

| | |
|--------------|------------------------|
| CODE | LED-CHNEL-006 |
| APPLICATION | Interior & Exterior |
| SIZE OF UNIT | 16mm x 16mm |
| INSTALLATION | Surface mount |
| FINISH | Natural Silver |
| MATERIALS | Extruded Aluminum 6063 |



STRIP LIGHT ADAPTOR

LUMME - ADAPTOR-7A



FEATURES

- AU Plug, 3 core, M/connect Socket
- Weight 320G



| CODE | LUMME-ADAPTOR-7A |
|---------------------|----------------------|
| APPLICATION | Interior |
| WATTAGE | 84W |
| INPUT | AC110-260V,AC50/60Hz |
| OUTPUT | DC12V 7A |
| COLOR TEMPERATURE | N/A |
| SIZE OF UNIT | 55mm x 21mm |
| WORKING TEMPERATURE | 0-40° |
| STORAGE TEMPERATURE | 20-60° |
| CERTIFICATION | SAA |
| IP | IP54 |

STRIP LIGHT ADAPTER

LUMME-3A-24V-ADAPTOR



FEATURES

- Design for led strip in caravan & shop fit
- AU Plug, 3 core, M/connect Socket



| CODE | LUMME-3A-24V-ADAPTOR |
|---------------------|----------------------|
| APPLICATION | Interior |
| WATTAGE | 72W |
| INPUT | AC110-260V,AC50/60Hz |
| OUTPUT | DC24V 3A |
| COLOR TEMPERATURE | N/A |
| SIZE OF UNIT | 55mm x 21mm |
| WORKING TEMPERATURE | 0-40° |
| STORAGE TEMPERATURE | 20-60° |
| CERTIFICATION | SAA |
| IP | IP20 |

STRIP LIGHT ADAPTER

LUMME-ADAPTOR-1A



FEATURES

- Design for led strip in caravan & shop fit
- AU plug +1.2M wire, M/connect Socket



| CODE | LUMME-ADAPTOR-1A |
|---------------------|----------------------|
| APPLICATION | Interior |
| WATTAGE | 12W |
| INPUT | AC110-260V,AC50/60Hz |
| OUTPUT | DC12V 1A |
| COLOR TEMPERATURE | N/A |
| SIZE OF UNIT | 75mm x 40mm x 28mm |
| WORKING TEMPERATURE | 0-40° |
| STORAGE TEMPERATURE | 20-60° |
| CERTIFICATION | SAA |
| IP | IP20 |

STRIP CONNECTORS



| | |
|-------------|---------------------------------|
| CODE | LUMME-CONNECTOR-2PIN |
| APPLICATION | Connect for single colour strip |
| SIZE | 100mm |



| | |
|-------------|------------------------------|
| CODE | LUMME-CONNECTOR-4PIN |
| APPLICATION | Connect for RGB colour strip |
| SIZE | 100mm |



| | |
|-------------|---------------------------------|
| CODE | LUMME-DC CONNECTOR 1.5M |
| APPLICATION | Connect for extension LED strip |
| SIZE | 1.5m |

STRIP ACCESSORIES

LUMME-4KEYS CONTROLLER




| | |
|-------------|--------------------------------|
| CODE | LUMME-4KEYS CONTROLLER |
| APPLICATION | Interior, match for RGB strips |
| FUNCTION | 4 keys control |



PANEL & RECESSED LIGHTS

LUMME-PL 3060

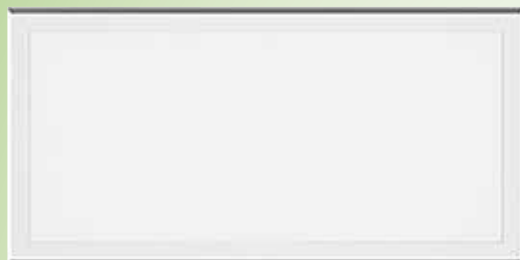


| CODE | LUMME-PL 3060 |
|-------------------|------------------------|
| APPLICATION | Interior |
| WATTAGE | 25W |
| WORKING VOLTAGE | AC200-240V |
| SIZE OF UNIT | 600mm x 300mm x 10mm |
| INSTALLATION | Recess |
| LED TYPE | Epistar |
| COLOR TEMPERATURE | 6000K |
| LUMEN | 2500LM |
| FINISH | White |
| MATERIALS | Aluminum + PMMA |
| DRIVER | Ctick approved |
| CRI | >80 |
| PLUG | 3 Pin plug + 1.2m wire |
| IP | IP44 |



PANEL & RECESSED LIGHTS

LUMME-PL 6060

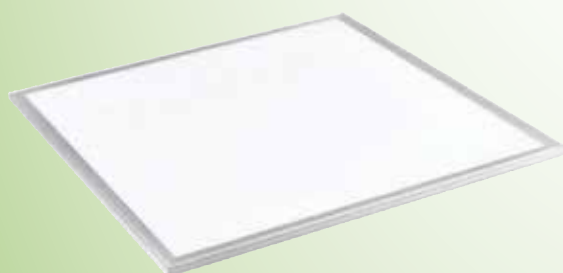

| CODE | LUMME-PL 6060 |
|-------------------|-------------------------|
| APPLICATION | Interior |
| WATTAGE | 45W |
| WORKING VOLTAGE | AC200-240V |
| SIZE OF UNIT | 600mm x 600mm |
| INSTALLATION | Recess |
| LED TYPE | Epistar |
| COLOR TEMPERATURE | 3000K (WW) - 6000K (CW) |
| LUMEN | 4500LM |
| FINISH | White |
| MATERIALS | Aluminum + PMMA |
| DRIVER | Ctick approved |
| CRI | >80 |
| PLUG | 3 Pin plug + 1.2m wire |
| IP | IP44 |





PANEL & RECESSED LIGHTS

LUMME-PL-30120



FEATURES

- Available in Warm white, Natural white and Cool white



| CODE | LUMME-PL-30120 |
|-------------------|------------------------|
| APPLICATION | Interior |
| WATTAGE | 45W |
| WORKING VOLTAGE | AC200-240V |
| SIZE OF UNIT | 1200mm x 300mm |
| INSTALLATION | Recess |
| LED TYPE | Epistar |
| COLOR TEMPERATURE | 3000K - 4000K - 6000K |
| LUMEN | 4500LM |
| FINISH | White |
| MATERIALS | Aluminum + PMMA |
| DRIVER | Ctick approved |
| CRI | >80 |
| PLUG | 3 Pin plug + 1.2m wire |
| IP | IP44 |

PANEL & RECESSED LIGHTS

LUMME-PL-60120




| CODE | LUMME-PL-60120 |
|-------------------|------------------------|
| APPLICATION | Interior |
| WATTAGE | 60W |
| WORKING VOLTAGE | AC200-240V |
| SIZE OF UNIT | 1200mm x 600mm |
| INSTALLATION | Recess |
| LED TYPE | Epistar |
| COLOR TEMPERATURE | 6000K (CW) |
| LUMEN | 6000LM |
| FINISH | White |
| MATERIALS | Aluminum + PMMA |
| DRIVER | Ctick approved |
| CRI | >80 |
| PLUG | 3 Pin plug + 1.2m wire |
| IP | IP44 |





PANEL & RECESSED FRAME

LUMME-PL-FRAME 60120




FEATURES

- Match with panel light Installation

| | |
|--------------|----------------------|
| CODE | LUMME-PL-FRAME 60120 |
| APPLICATION | Interior |
| SIZE OF UNIT | 1225mm x 625mm |
| CUT OUT SIZE | 1190mm x 590mm |
| INSTALLATION | Surface mount |
| FINISH | White |
| MATERIALS | Aluminum 6062 |

PANEL & RECESSED FRAME

LUMME-PL-FRAME 6060




FEATURES

- Match with panel light Installation

| | |
|--------------|---------------------|
| CODE | LUMME-PL-FRAME 6060 |
| APPLICATION | Interior |
| SIZE OF UNIT | 590mm x 590mm |
| CUT OUT SIZE | 1190mm x 590mm |
| INSTALLATION | Surface mount |
| FINISH | White |
| MATERIALS | Aluminum 6062 |

PANEL & RECESSED FRAME

LUMME-PL-FRAME 15120

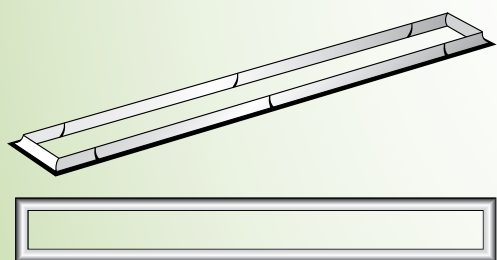


FEATURES

- Match with panel light Installation

| | |
|--------------|----------------------|
| CODE | LUMME-PL-FRAME 15120 |
| APPLICATION | Interior |
| SIZE OF UNIT | 1225mm x 175mm |
| CUT OUT SIZE | 1190mm x 140mm |
| INSTALLATION | Recess into ceiling |
| FINISH | White |
| MATERIALS | Aluminum 6062 |

PANEL & RECESSED FRAME

LUMME-PL-FRAME 30120

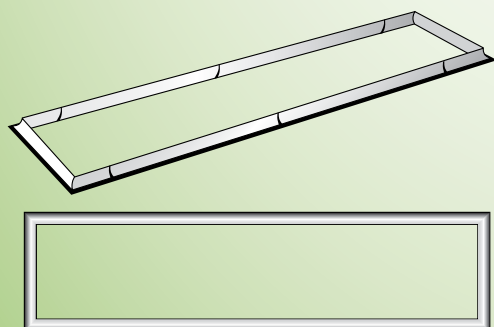

FEATURES


- Match with panel light Installation

| | |
|--------------|----------------------|
| CODE | LUMME-PL-FRAME 30120 |
| APPLICATION | Interior |
| SIZE OF UNIT | 1225mm x 325mm |
| CUT OUT SIZE | 1190mm x 290mm |
| INSTALLATION | Recess into ceiling |
| FINISH | White |
| MATERIALS | Aluminum 6062 |



PANEL & RECESSED FRAME

LUMME-PL-FRAME 30120

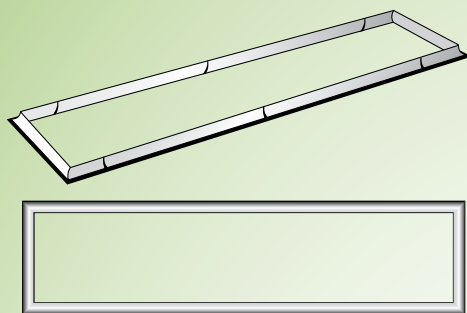

| | |
|--------------|----------------------|
| CODE | LUMME-PL-FRAME 30120 |
| APPLICATION | Interior |
| SIZE OF UNIT | 1200mm x 300mm |
| CUT OUT SIZE | 1165mm x 265mm |
| INSTALLATION | Surface mount |
| FINISH | White |
| MATERIALS | Aluminum 6062 |

FEATURES

- Match with panel light Installation

PANEL ACCESSORIES

LUMME-Z BRACKET



| | |
|--------------|---------------------|
| CODE | LUMME-Z BRACKET |
| INSTALLATION | Z Bracket for Panel |
| FINISH | Steel |
| MATERIALS | S/S602 |

FEATURES

- Z Bracket for Panel installation 4pcs/set

PANEL ACCESSORIES

LED-PL ACCESSORIES-1M



| | |
|--------------|-----------------------|
| CODE | LED-PL ACCESSORIES-1M |
| APPLICATION | Interior suspended |
| SIZE OF UNIT | 1m |
| INSTALLATION | Suspended mount |
| FINISH | White & steel |
| MATERIALS | Stainless steel cable |

FEATURES

- Panel light fixture for suspended mounting -
Stainless steel cable 1set of 4 pcs 1M



LED MODULES

LUMME-M5630



FEATURES

- Design for led strip in caravan & shop fit
- AU plug +1.2M wire, M/connect Socket
- Power supply sold separately



| | |
|-------------------|-------------------------|
| CODE | LUMME-M5630 |
| APPLICATION | Interior and Exterior |
| WATTAGE | 1.2W |
| WORKING VOLTAGE | DC12V |
| SIZE OF UNIT | 65mm x 15mm x 1mm |
| LED TYPE | SMD5050 |
| COLOR TEMPERATURE | 6000K |
| LUMEN | 130LM |
| DRIVER | C-tick Approved adapter |
| CRI | >70 |
| IP | IP65 |

LED MODULES

LUMME-M5631



FEATURES


- 3M tape on back of each module
- Power supply sold separately



| | |
|-------------------|---------------------|
| CODE | LUMME-M5631 |
| APPLICATION | Interior & Exterior |
| WATTAGE | 2.8W |
| WORKING VOLTAGE | DC12V |
| SIZE OF UNIT | 60mm x 30mm x 15mm |
| LED TYPE | SMD Cree 3535 |
| COLOR TEMPERATURE | 6000K |
| LUMEN | 280LM |
| MATERIALS | ABS |
| CRI | >70Ra |
| IP | IP67 |

LED MODULES

LUMME-M5632

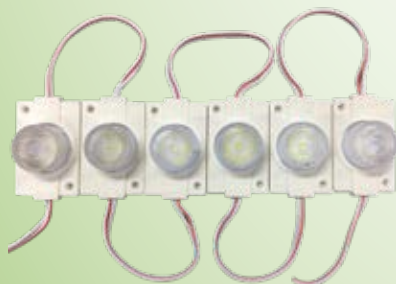

FEATURES

- 3M tape on back of each module
- Power supply sold separately



| | |
|-------------------|---------------------|
| CODE | LUMME-M5632 |
| APPLICATION | Interior & Exterior |
| WATTAGE | 1.5W |
| WORKING VOLTAGE | DC12V |
| SIZE OF UNIT | 43mm x 36mm x 18mm |
| LED TYPE | SMD Epistar 3030 |
| COLOR TEMPERATURE | 6000K |
| LUMEN | 150LM |
| MATERIALS | ABS |
| CRI | >70Ra |
| IP | IP67 |



LED MODULES

LUMME-M5641



FEATURES

- Waterproof
- 3M tape on back of each module
- Power supply sold separately



| | |
|-------------------|---------------------|
| CODE | LUMME-M5641 |
| APPLICATION | Interior & Exterior |
| WATTAGE | 3W |
| WORKING VOLTAGE | DC12V |
| SIZE OF UNIT | 96mm x 18mm x 1.1mm |
| LED TYPE | SMD Epistar 3030 |
| COLOR TEMPERATURE | 6000K |
| LUMEN | 330LM |
| MATERIALS | ABS |
| CRI | >70Ra |
| IP | IP65 |

LED MODULES

LUMME-M5642



FEATURES

- Waterproof
- 3M tape on back of each module
- Power supply sold separately



| | |
|-------------------|--------------------------|
| CODE | LUMME-M5642 |
| APPLICATION | Interior & Exterior |
| WATTAGE | 5W |
| WORKING VOLTAGE | DC12V |
| SIZE OF UNIT | 83.5mm x 43.5mm x 21.3mm |
| LED TYPE | SMD Epistar 2835 |
| COLOR TEMPERATURE | 6000K |
| LUMEN | 550LM |
| MATERIALS | ABS |
| CRI | >70Ra |
| IP | IP65 |

LED POWER SUPPLIES

| | |
|--------|------------------------------------|
| CODE | LUMME-ELG-150-12V-3Y |
| INPUT | 100VAC to 305VAC, 142VDC to 431VDC |
| OUTPUT | DC12V |



| | |
|--------|-----------------------------------|
| CODE | LUMME-HLG-320H-12V |
| INPUT | 90VAC to 305VAC, 127VDC to 431VDC |
| OUTPUT | DC12V |



| | |
|--------|------------------------------------|
| CODE | LUMME-ELG-200-12V-3Y |
| INPUT | 100VAC to 305VAC, 142VDC to 431VDC |
| OUTPUT | DC12V |





HI BAY LIGHTS

HB03-150-T



| | |
|-------------------|--|
| CODE | LUMME-HB03-150-T (I Part approved) |
| APPLICATION | Interior & Exterior |
| WATTAGE | 150W |
| WORKING VOLTAGE | AC240-270 |
| SIZE OF UNIT | 350mm x 350mm x 159mm |
| INSTALLATION | Recess |
| LED TYPE | Samsung |
| COLOR TEMPERATURE | 6000K |
| LUMEN | 20000LM |
| FINISH | Black body & RED/Black/white or other color trim |
| MATERIALS | Aluminum |
| DRIVER | MW |
| CRI | 80Ra |
| PLUG | 1.5m wire with 3Pin plug |
| IP | IP65 |

FEATURES

- LED Type Nichia SMD
- Life time 50,000 Hours
- Dimmer Option



HI BAY LIGHTS

HB03-200-T



| | |
|-------------------|--|
| CODE | LUMME-HB03-200-T (I Part approved) |
| APPLICATION | Interior & Exterior |
| WATTAGE | 200W |
| WORKING VOLTAGE | AC240-270 |
| SIZE OF UNIT | 350mm x 350mm x 159mm |
| INSTALLATION | Recess |
| LED TYPE | Samsung |
| COLOR TEMPERATURE | 6000K |
| LUMEN | 20000LM |
| FINISH | Black body & RED/Black/white or other color trim |
| MATERIALS | Aluminum |
| DRIVER | MW |
| CRI | 80Ra |
| PLUG | 1.5m wire with 3Pin plug |
| IP | IP65 |

FEATURES

- Daylight Sensor
- LED Type Nichia SMD
- Life time 50,000 Hours
- Dimmer Option





HI BAY LIGHTS

HBL150W-02



FEATURES

- LED Type Nichia SMD
- Life time 50,000 Hours



| | |
|-------------------|--|
| CODE | LUMME-HBL150W-02 (I Part Approved) |
| APPLICATION | Interior & Exterior |
| WATTAGE | 200W |
| WORKING VOLTAGE | AC240-270 |
| SIZE OF UNIT | 300mm x 300mm x 189mm |
| INSTALLATION | Suspended / recessed |
| LED TYPE | Philips smd 3030 LED |
| COLOR TEMPERATURE | 6000K |
| LUMEN | 24000LM |
| FINISH | Black body & RED/Black/white or other color trim |
| MATERIALS | Aluminum |
| DRIVER | MW |
| CRI | 80Ra |
| PLUG | 1.5m wire with 3Pin plug |
| IP | IP65 |

HI BAY SENSOR

LUMME-MS01



LUMME-MS01-Sensor, sensor kit for UFO Hibay, MS01 supplies a simple and effective solution for daylight harvesting. connecting to 1-10V interface and using photocell to measure ambient lux level and automatically calculate how much artificial light is needed, and then convert the amount of light to 1-10V dimmable control gears (ballasts or LED drivers). 1-10v dimmable control gears adjust the lighting output according to the signal from the daylight sensor.



EXIT LIGHTS

LUMME-EXIT LIGHT-R



FEATURES

- Ni-CD 3.6V 600/800mah battery
- 1.5/3 hour battery duration time



| | |
|-------------------|------------------------------|
| CODE | Lumme-EXIT LIGHT-R |
| APPLICATION | Emergency Acrylic EXIT light |
| WATTAGE | 3W |
| WORKING VOLTAGE | AC 240V,50/60HZ |
| SIZE OF UNIT | 370mm x 200mm x 23mm |
| INSTALLATION | Recess Double Size |
| LED TYPE | SMD |
| COLOR TEMPERATURE | 6000K |
| LUMEN | 520LM |
| MATERIALS | Acrylic plate |
| IP | IP30 |

EXIT LIGHTS

LUMME-EXIT LIGHT-HD



FEATURES

- Ni-CD 3.6V 600/800mah battery
- 1.5/3 hour battery duration time



| | |
|-------------------|------------------------------|
| CODE | Lumme-EXIT LIGHT-HD |
| APPLICATION | Emergency Acrylic EXIT light |
| WATTAGE | 3W |
| WORKING VOLTAGE | AC 240V,50/60HZ |
| SIZE OF UNIT | 370mm x 200mm x 23mm |
| INSTALLATION | Hanger Wall, Ceiling |
| LED TYPE | SMD |
| COLOR TEMPERATURE | 6000K |
| LUMEN | 520LM |
| MATERIALS | Acrylic plate |
| IP | IP30 |

EXIT LIGHTS

LUMME-EXIT LIGHT-RD



FEATURES

- Ni-CD 3.6V 600/800mah battery
- 1.5/3 hour battery duration time



| | |
|-------------------|------------------------------|
| CODE | Lumme-EXIT LIGHT-RD |
| APPLICATION | Emergency Acrylic EXIT light |
| WATTAGE | 3W |
| WORKING VOLTAGE | AC 240V,50/60HZ |
| SIZE OF UNIT | 370mm x 200mm x 23mm |
| INSTALLATION | Recess Double Size |
| LED TYPE | SMD |
| COLOR TEMPERATURE | 6000K |
| LUMEN | 520LM |
| MATERIALS | Acrylic plate |
| IP | IP30 |



GARDEN LIGHTS

LUMME-F113A-5W-3K/4K



FEATURES

- 1M length VDE Rubber cable
2 x 0.75mm with waterproof connector
- Life time 30000 Hours



| | |
|-------------------|-------------------------|
| CODE | LUMME-F113A-5W-3K/4K |
| APPLICATION | Exterior |
| WATTAGE | 5W |
| WORKING VOLTAGE | AC/DC12V |
| SIZE OF UNIT | 56.5mm x 85.5mm x 240mm |
| INSTALLATION | Surface |
| LED TYPE | COB Sharp |
| COLOR TEMPERATURE | 3000K - 6000K |
| LUMEN | 520LM |
| FINISH | Black |
| MATERIALS | Aluminum + PC |
| DRIVER | Ctick Approved |
| CRI | >80 |
| IP | IP67 |


GARDEN LIGHTS

LUMME-F113A-DRIVER + CABLE



FEATURES


- Water proof connector for garden lighting



| | |
|-----------------|----------------------------|
| CODE | LUMME-F113A-DRIVER + CABLE |
| APPLICATION | Exterior |
| WATTAGE | 30W |
| WORKING VOLTAGE | DC12V, 50/60Hz |
| INSTALLATION | Surface |
| FINISH | Black |
| DRIVER | SAA Approved |
| IP | IP67 |

GARDEN LIGHTS

LUMME-DECK LIGHT-0.6W (PC)



FEATURES

- Attached parts
- 1DC 12V constant voltage drive power supply
- 22AWG wire with connectible water proof plug
- T Shape power cord with connectible water proof plug
- Life time 30000 hours



| | |
|-------------------|----------------------------|
| CODE | LUMME-DECK LIGHT-0.6W (PC) |
| APPLICATION | Exterior |
| WATTAGE | 0.6W |
| WORKING VOLTAGE | AC/DC12V |
| SIZE OF UNIT | 24mm x 38mm |
| INSTALLATION | Recess |
| LED TYPE | 1LED2538 |
| COLOR TEMPERATURE | 3000K/6000K |
| LUMEN | 30LM |
| FINISH | Chrome |
| MATERIALS | Aluminum Surface |
| CRI | >80 |
| DRIVER | SAA Approved |
| IP | IP67 |



LUMME
LED LIGHTING

**OFFERING BEAUTIFUL
LIGHTING SOLUTIONS
FOR HOMES
AND COMMERCIAL
PROPERTIES**