



DECOREAGLE INSTALLATION GUIDELINES

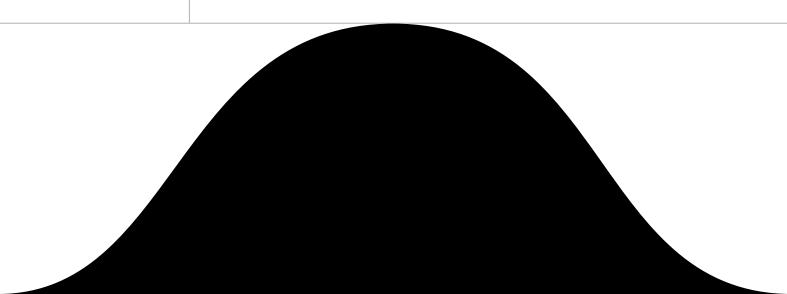

CONTENTS

PRE INSTALLATION	<u> </u>
BLIND SLOT	
3D	<u>5</u>
2D	<u>6</u>
DSB FIXING	
3D —	<u>7</u>
2D —	<u>8</u>
BJ2 FIXING	
3D	<u>9</u>
2D —	1C
	<u></u>
GET IN TOUCH	11

PRE INSTALLATION

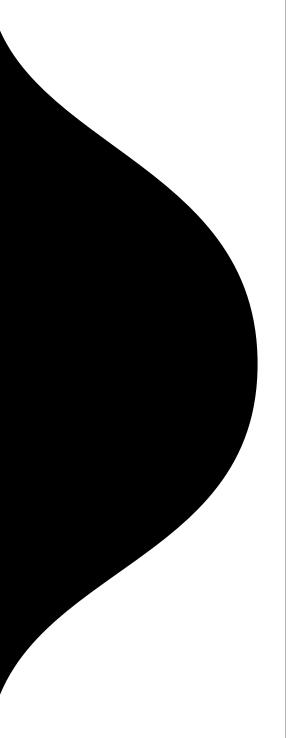

ACCLIMATISATION

Panels need to acclimatise to the environment before installation. Please contact your local Decor Systems representative for more information.

DECOR SYSTEMS CARE & MAINTENANCE

INTRODUCTION

This panels system is a highly durable modular wall and ceiling panelling system that is factory finished. Substrates include MDF, plywood and fibre cement.

CARE AND MAINTENANCE

General Regular Cleaning

This is best carried out with a sponge or soft cloth and any household cleaning detergents. Abrasive cleaning agents must not be used.

Polishing

The product is suitable for polishing with a soft cloth if required.

Graffiti Removal


Pressure pack (ie. Paint) damage is usually easily removed by wiping with mineral turpentine saturated rag within 48 hours of application.

Felt tipped marker damage should be removed using methylated spirits- again, within 48 hours.

Mechanical Damage

Should the panels be physically scored, chipped or scraped in any way please consult Decor Systems for the best method of repair/replacement.

Scratch damage can usually be repaired simply by the application of the topcoat colour (available from the manufacturer) using a fine camel hairbrush.

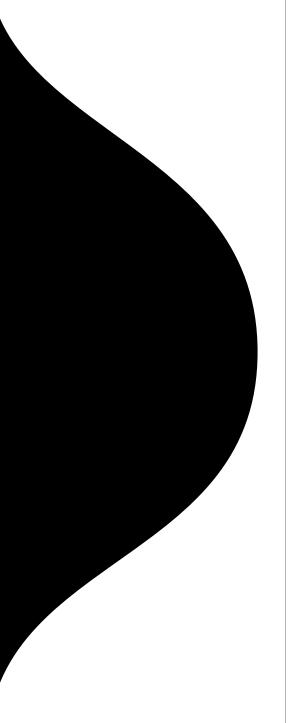

DISCLAIMER: ANY ADVICE, RECOMMENDATIONS, INFORMATION, ASSISTANCE OR SERVICE PROVIDED BY DECOR SYSTEMS IN RELATION TO GOODS MANUFACTURED BY IT OR THEIR USE AND APPLICATION IS GIVEN IN GOOD FAITH AND BELIEVED BY DECOR SYSTEMS TO BE APPROPRIATE AND RELIABLE. SINCE THE USE AND APPLICATION OF THIS PRODUCT IS BEYOND OUR CONTROL WE CANNOT BE HELD RESPONSIBLE FOR PRODUCT FIELD PERFORMANCE. THE INFORMATION PRESENTED ABOVE IS THE RESULT OF OUR CONSIDERABLE EXPERIENCE WITH THIS PRODUCT BUT IS NOT TO BE CONSTRUED AS A PERFORMANCE WARRANTY

- WALL AND CEILING FURRING CHANNEL FRAMING **DECOREAGLE INSTALLATION DETAIL BLIND SLOT FIXING METHOD** - RECOMMENDATION FURRING CHANNELS AT 400MM CENTRES Wall or Ceiling Application HARDWARE: - RECOMMENDATION OF 600MM CENTRES **FURRING** CHANNEL **FRAMING DECOREAGLE CONTINUOUS SLOTTED PANEL BLIND SLOT FIXING METHOD** BLACK SCREW **FIXING INTO** Disclaimer: **REBATE** All specifications shown in these documents are intended as a guide only & should not be considered as conclusive. Fixing types & sizes used to install these products must be considered in conjunction with It is the users responsibility to ensure the use of this document coincides with their own judgement and is appropriate for the application. TIMBER Decor Systems cannot be held responsible for any consequences PANEL arising from the improper use of this material (whether negligence or otherwise). THESE DESIGNS, DRAWINGS & SPECIFICATIONS & **DECORSORB** COPYRIGHT THEREOF ARE THE PROPERTY OF DECOR SYSTEMS DECOR SYSTEMS AUSTRALIA & MUST NOT BE USED, RETAINED OR COPIED WITHOUT THE WRITTEN **BLIND SLOT 3D** AUTHORITY OF DECOR SYSTEMS AUSTRALIA.

DECOREAGLE INSTALLATION DETAIL BLIND SLOT FIXING METHOD


Wall or Ceiling Application

FRAMING:

- WALL AND CEILING FURRING CHANNEL FRAMING BY OTHERS
- RECOMMENDATION FURRING CHANNELS AT 400MM CENTRES

HARDWARE:

- RECOMMENDATION OF 600MM CENTRES

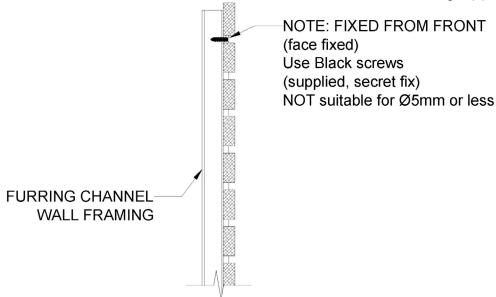


FURRING CHANNEL
CEILING FRAMING


NOTE: FIXED FROM FRONT—
(face fixed)
Use Black screws
(supplied, secret fix)
NOT suitable for Ø5mm or less

SECRET SCREW FIX
TO CEILING FRAMING

SECRET SCREW FIX TO WALL FRAMING



END TO END BUTT JOIN

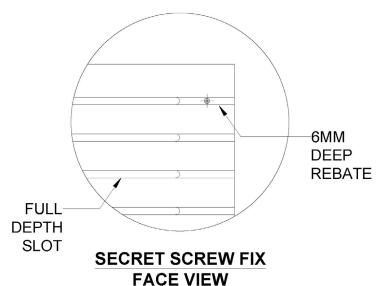

Disclaimer:

All specifications shown in these documents are intended as a guide only & should not be considered as conclusive. Fixing types & sizes used to install these products must be considered in conjunction with site conditions.

It is the users responsibility to ensure the use of this document coincides with their own judgement and is appropriate for the application. Decor Systems cannot be held responsible for any consequences arising from the improper use of this material (whether negligence or otherwise).

THESE DESIGNS, DRAWINGS & SPECIFICATIONS & COPYRIGHT THEREOF ARE THE PROPERTY OF DECOR SYSTEMS AUSTRALIA & MUST NOT BE USED, RETAINED OR COPIED WITHOUT THE WRITTEN AUTHORITY OF DECOR SYSTEMS AUSTRALIA.



BLIND SLOT 2D

FRAMING: - WALL AND CEILING FURRING CHANNEL FRAMING DECOREAGLE INSTALLATION DETAIL **DSB FIXING METHOD** - RECOMMENDATION FURRING CHANNELS AT 400MM CENTRES Wall or Ceiling Application HARDWARE: - RECOMMENDATION OF 600MM CENTRES **FURRING DECOREAGLE CHANNEL CONTINUOUS SLOTTED PANEL FRAMING DSB FIXING METHOD BLACK SCREW FIXING INTO SLOT** Disclaimer: All specifications shown in these documents are intended as a guide only & should not be considered as conclusive. Fixing types & sizes used to install these products must be considered in conjunction with TIMBER site conditions. **PANEL** It is the users responsibility to ensure the use of this document coincides with their own judgement and is appropiate for the application. Decor Systems cannot be held responsible for any consequences DSB arising from the improper use of this material (whether negligence or otherwise). THESE DESIGNS, DRAWINGS & SPECIFICATIONS & **DECORSORB** COPYRIGHT THEREOF ARE THE PROPERTY OF DECOR SYSTEMS DECOR SYSTEMS AUSTRALIA & MUST NOT BE USED, RETAINED OR COPIED WITHOUT THE WRITTEN **DSB FIXING 3D** AUTHORITY OF DECOR SYSTEMS AUSTRALIA.

DECOREAGLE INSTALLATION DETAIL DSB FIXING METHOD


Wall or Ceiling Application

FRAMING:


- WALL AND CEILING FURRING CHANNEL FRAMING BY OTHERS
- RECOMMENDATION FURRING CHANNELS AT 400MM CENTRES

HARDWARE:


- RECOMMENDATION OF 600MM CENTRES

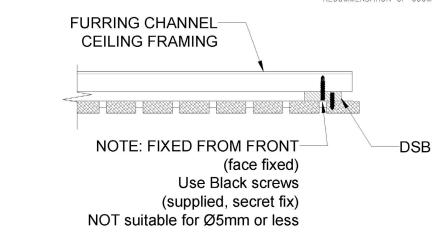


SECRET SCREW FIX TO CEILING FRAMING

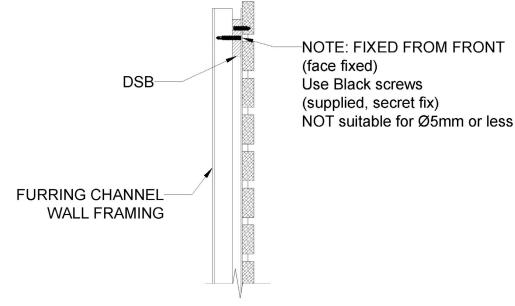

SECRET SCREW FIX TO WALL FRAMING



END TO END BUTT JOIN

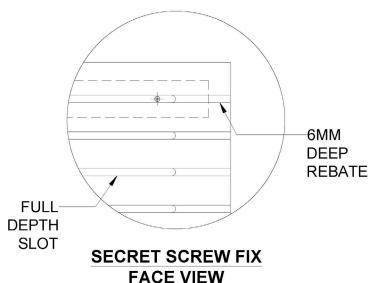

Disclaimer:

All specifications shown in these documents are intended as a guide only & should not be considered as conclusive. Fixing types & sizes used to install these products must be considered in conjunction with site conditions.

It is the users responsibility to ensure the use of this document coincides with their own judgement and is appropriate for the application. Decor Systems cannot be held responsible for any consequences arising from the improper use of this material (whether negligence or otherwise).

THESE DESIGNS, DRAWINGS & SPECIFICATIONS & COPYRIGHT THEREOF ARE THE PROPERTY OF DECOR SYSTEMS AUSTRALIA & MUST NOT BE USED, RETAINED OR COPIED WITHOUT THE WRITTEN AUTHORITY OF DECOR SYSTEMS AUSTRALIA.




DSB FIXING 2D


FRAMING: **DECOREAGLE INSTALLATION DETAIL** - WALL AND CEILING FURRING CHANNEL FRAMING **BJ2 FIXING METHOD** - RECOMMENDATION FURRING CHANNELS AT 400MM CENTRES Wall Application Only - RECOMMENDATION BJ2 SPLIT BATTEN AT 600MM CENTRES HARDWARE: - RECOMMENDATION OF 600MM CENTRES **FURRING CHANNEL FRAMING** DECOREAGLE CONTINUOUS SLOTTED PANEL **BJ2 FIXING METHOD** BJ2 **SPLIT BATTEN** Disclaimer: All specifications shown in these documents are intended as a guide only & should not be considered as conclusive. Fixing types & sizes used to install these products must be considered in conjunction with site conditions. It is the users responsibility to ensure the use of this document coincides with their own judgement and is appropriate for the application. TIMBER PANEL Decor Systems cannot be held responsible for any consequences LIFT & HANG OR arising from the improper use of this material (whether negligence or otherwise). SLIDE INTO PLACE BJ2 TO **DECORSORB REAR OF** THESE DESIGNS, DRAWINGS & SPECIFICATIONS & COPYRIGHT THEREOF ARE THE PROPERTY OF DECOR SYSTEMS **PANEL** DECOR SYSTEMS AUSTRALIA & MUST NOT BE USED, RETAINED OR COPIED WITHOUT THE WRITTEN **BJ2 FIXING 3D** AUTHORITY OF DECOR SYSTEMS AUSTRALIA.

DECOREAGLE INSTALLATION DETAIL BJ2 FIXING METHOD


Wall Application Only

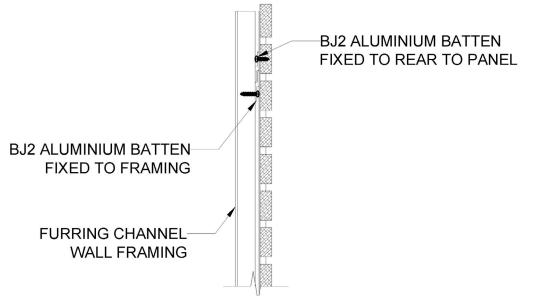

SECRET BJ2 FIX



END TO END BUTT JOINT

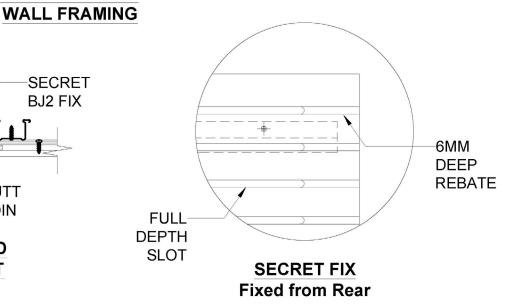

FRAMING:

- WALL AND CEILING FURRING CHANNEL FRAMING BY OTHERS
- RECOMMENDATION FURRING CHANNELS AT 400MM CENTRES
- RECOMMENDATION BJ2 SPLIT BATTEN AT 600MM CENTRES

HARDWARE:

- RECOMMENDATION OF 600MM CENTRES

Disclaimer:

All specifications shown in these documents are intended as a guide only & should not be considered as conclusive. Fixing types & sizes used to install these products must be considered in conjunction with site conditions.

It is the users responsibility to ensure the use of this document coincides with their own judgement and is appropriate for the application. Decor Systems cannot be held responsible for any consequences arising from the improper use of this material (whether negligence or otherwise).

THESE DESIGNS, DRAWINGS & SPECIFICATIONS & COPYRIGHT THEREOF ARE THE PROPERTY OF DECOR SYSTEMS AUSTRALIA & MUST NOT BE USED, RETAINED OR COPIED WITHOUT THE WRITTEN AUTHORITY OF DECOR SYSTEMS AUSTRALIA.



BJ2 FIXING 2D

GET IN TOUCH



1800 835 035 letstalk@decorsystems.com.au



