

Neoflex™ 800 Series
REPTile

Neoflex™
RESILIENT FLOORING


REPHOUSE
www.rephouse.com



Bold Performance.

Neoflex™ 800 Series REPTiles are dual-durometer rubber tiles, 1m x 1m in size, available from 6 - 12 mm thick. Available in any Neoflex 800 Series color, Neoflex™ 800 Series REPTiles are a terrific choice for indoor commercial areas, such as offices, libraries, cafes, walkways and lift lobbies.


The top surface is made of a dense mixed coloured synthetic EPDM rubber top layer that is laminated to a recycled rubber layer below. The modular construction allows for bespoke environmental graphics, logos and designs to be pre-fabricated and inlaid into the tiles under exacting conditions.

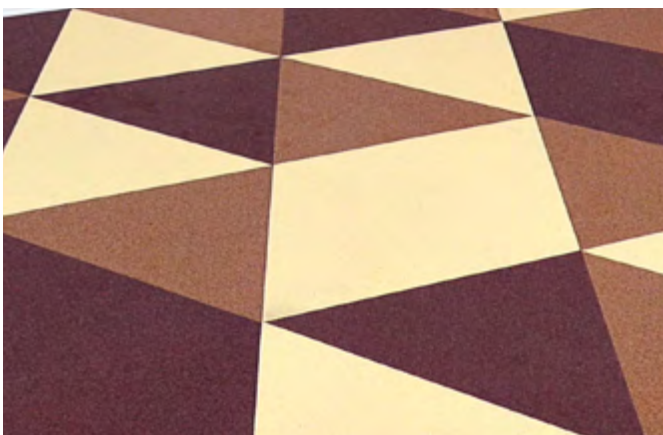

www.rephouse.com



Specifications.

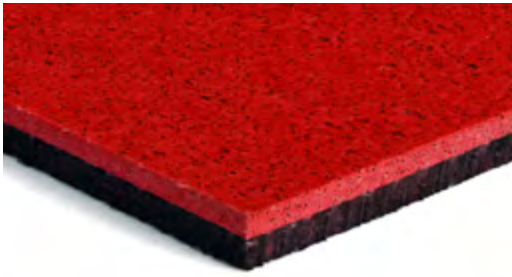

Property	Standard	Result
Thickness		6 - 12 mm
Size		1000 mm x 1000 mm
Shore Hardness	ASTM D 2240	60°
Resilience	DIN 18032-2	40%
Tear Strength Top Layer	ASTM D 624	1.25 MPa
Tear Strength Base Layer	ASTM D 624	0.70 MPa
Taber Abrasion	ASTM C 504	0.66 gr
Remaining Indentation	DIN 53960	0.05 mm
Flammability	EN 13501-1	C _{fl} -s1
Coefficient of Friction	ASTM D 2047-97	Dry: 1.03 Wet: 0.97

All in one, easily installed format.

Neoflex™ 800 Series REPTiles are supplied in 1m x 1m tiles, that are easy to install.




without graphics




with graphics




Standard Colors.



801




802




803




804




805




806




807




808



809




810




811




812



813



814



815




816




817



818



819



820

Standard Colors

For real samples, contact us!