

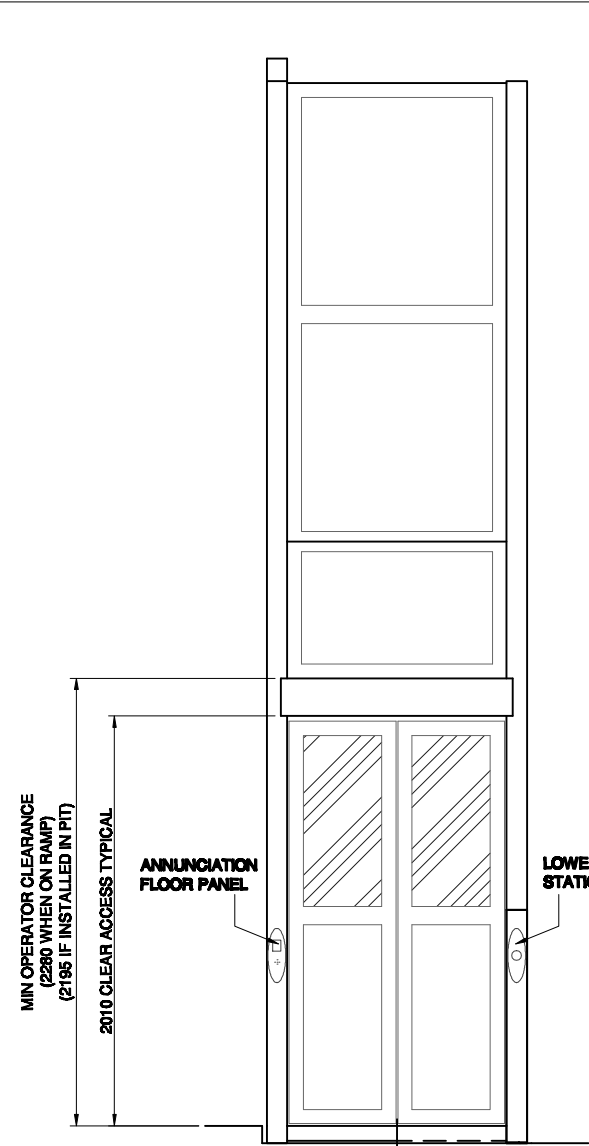



IF AVAILABLE THE PIT AND APERTURE THROUGH THE UPPER FLOOR SHOULD BE FORMED AS PER THE ABOVE DRAWING. WHEN THE LIFT ENCLOSURE IS LOCATED, THE CEILING APERTURE ABOVE MUST BE DIRECTLY ALIGNED.

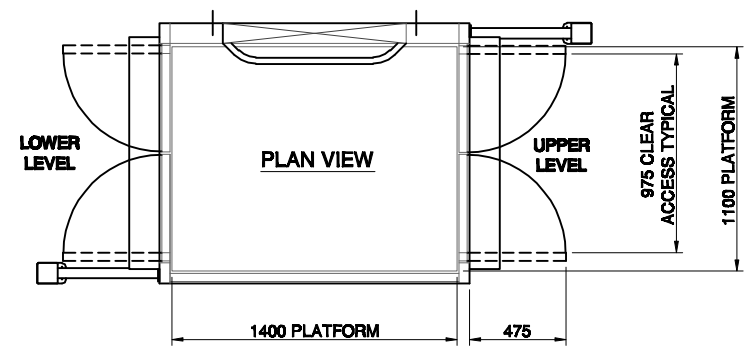

FRONT ELEVATION

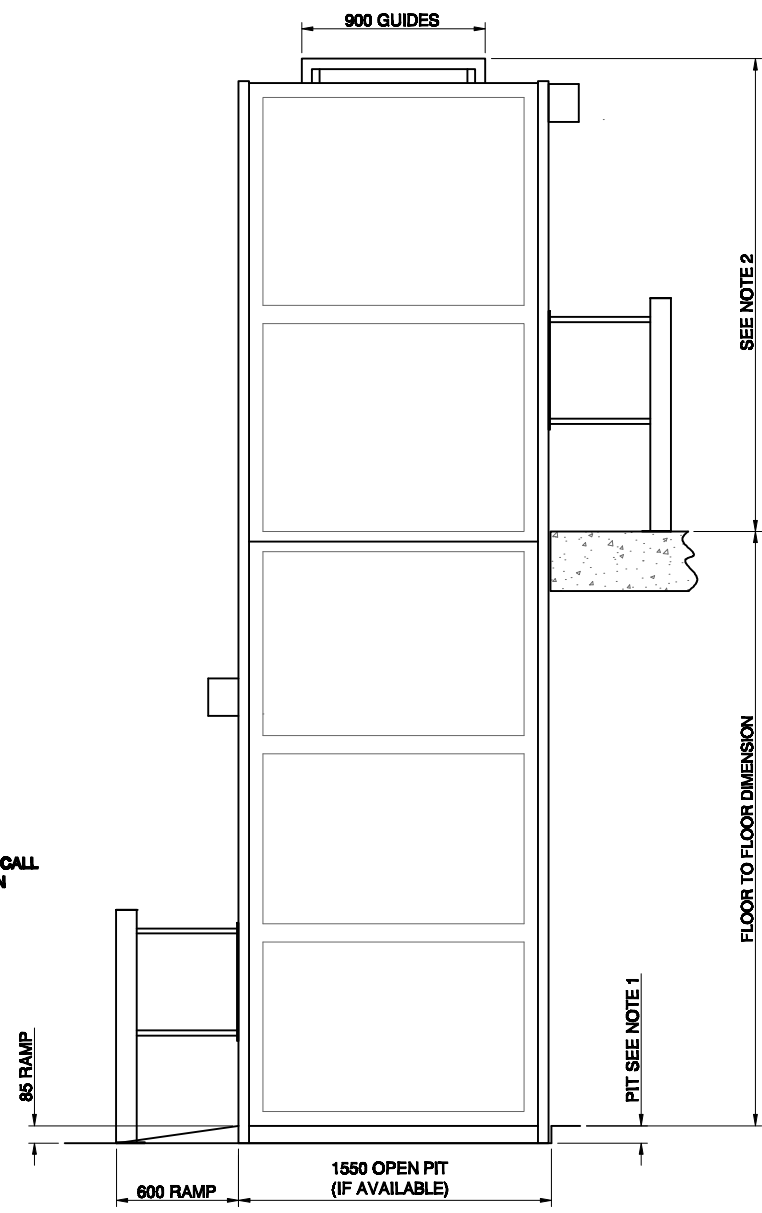

SIDE ELEVATION

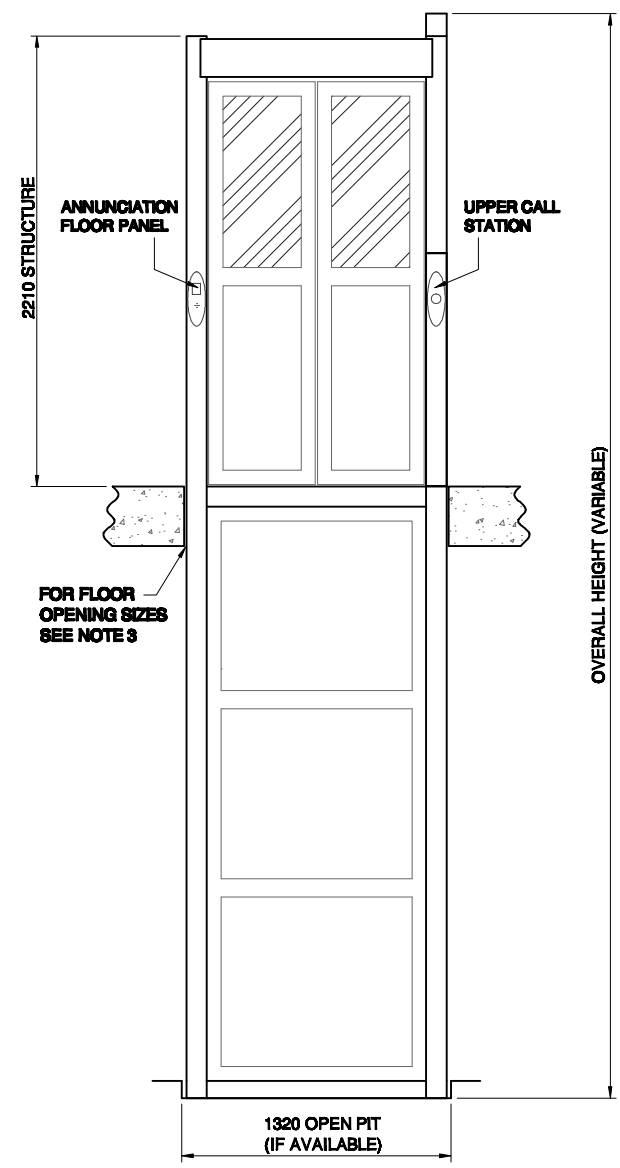

REAR ELEVATION

NOTES

- 1 -- TO PROVIDE A SMOOTH TRANSITION BETWEEN FLOOR AND PLATFORM LEVELS, AN 85mm DEEP PIT SHALL BE REQUIRED. IF A PIT IS NOT AVAILABLE AN 85mm HIGH RAMP MAY BE PROVIDED.
- 2 -- THE MAXIMUM HEADROOM REQUIRED IS A FUNCTION OF THE BASIC FLOOR TO FLOOR DIMENSION. FOR ADDITIONAL INFORMATION CONTACT PHOENIX LIFTING SYSTEMS LTD.
- 3 -- THE APERTURE THROUGH THE FLOOR (IF APPLICABLE) SHALL BE IDENTICAL SIZE TO PIT DIMENSIONS AND SHALL BE DIRECTLY ALIGNED.
- 4 -- THE DOOR ENTRY / EXIT POINTS MAY BE AMENDED TO EITHER A SAME SIDE OR ADJACENT ENTRY LAYOUT
- 5 -- THIS DATA SHEET IS INTENDED FOR INFORMATION PURPOSES ONLY. PHOENIX LIFTING SYSTEMS LTD RESERVE THE RIGHT TO AMEND ANY DESIGN ASPECTS WITHOUT PRIOR NOTICE.

C	25.6.08	NOTE AND PUSH POSTS AMENDED
B	24.6.08	INFORMATION FORMALISED
A	23.10.07	NEW DRAWING
Iss	Date	Revision note
Date	Checked by	Date
Filename - 0230.70013C		Scale - NTS
		Designed by - PD

Title
**PLATFORM LIFT
 LARGE PLATFORM WITH
 POWERED CENTRE OPENING
 DOORS
 (6mtr MAX TRAVEL)**

Dwg No	0230.70013	Issue	C
--------	-------------------	-------	----------