




IMPORTANT NOTE
Lifting eye / beam must be provided for lifting the guides into place. The eye / beam must be rated with a SWL of 500kg

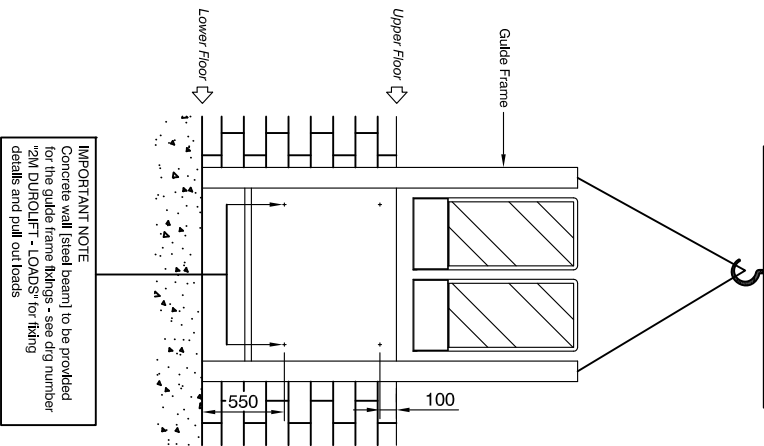

GUIDE FRAME FIXING DETAIL

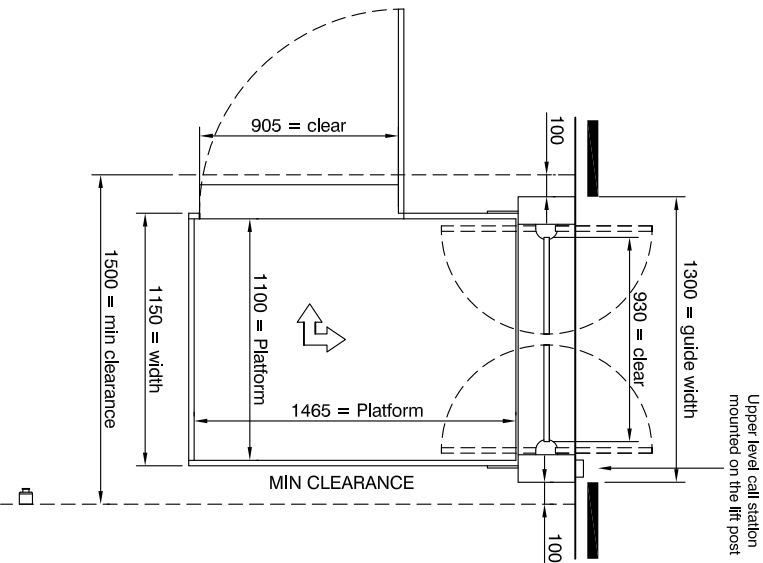

PLAN VIEW

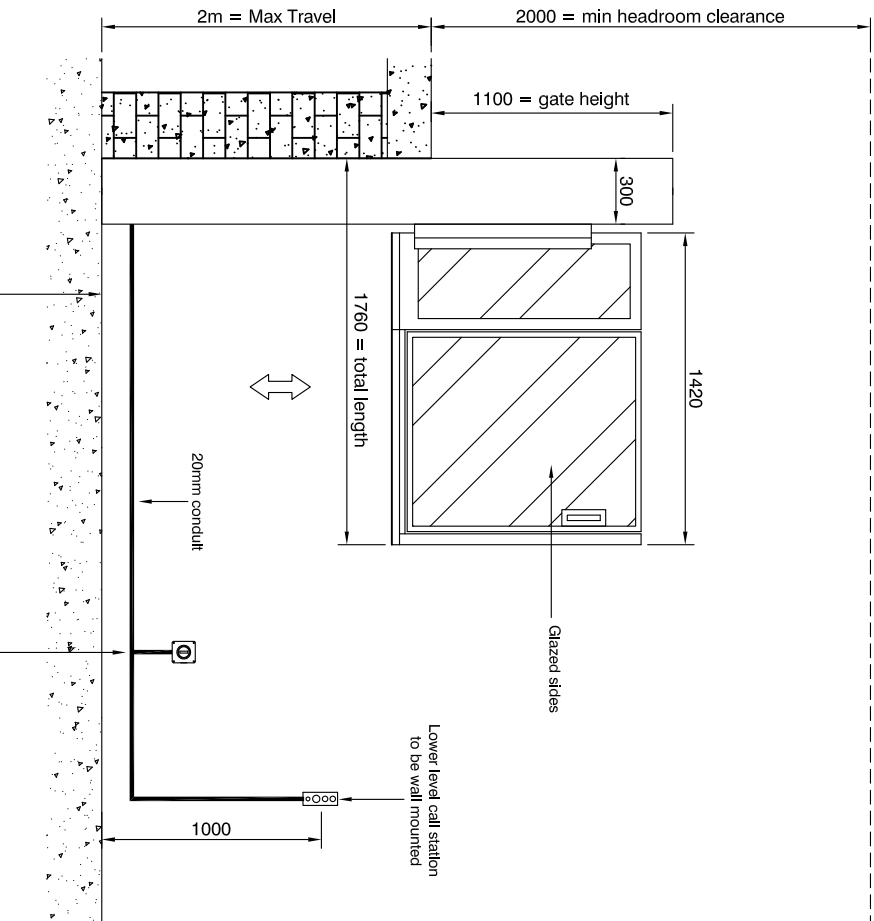

SIDE ELEVATION

Vertical Lift Platform Specification

- Load: 340kg / 2 persons
- Drive: Direct driven screw and nut
- Speed: 0.6m / sec
- Travel: Min 0.6m / Max 2m
- Stops: 2
- Motor: 1.1kw
- Power: 415v 3ph 50Hz 10A
- Colour: RAL 7031 as standard (alternative RAL colours available)

Building work required

- 1 - Provide power supply
- 2 - Provide upper floor adequate for fixing the guides
- 3 - Provide level surface on lower and upper level

<p>Unit 34, 49/51 Mitchell Road Bloomfield NSW 1500 Tel: 1300 884960 Fax: +61 2 88805048 Email: info@platformlift.com.au Website: www.platformlift.com.au</p>		TITLE	2M DURROLIFT - L/H ADJACENT		
		DWG NO.	2M DURROLIFT - L/H ADJ		
SCALE	NTS	DATE	27/05/2011	DRAWN	CH
		REV	B		