



WOVEN IMAGE®

DESIGN DEPARTMENT - PRODUCT SPECIFICATION SHEET ISSUE DATE: 15.10.18

DESIGN NAME	Balance 1300
DESIGNER:	Woven Image
ORIGIN:	Australia
COLOURS:	10
QUANTITY:	4 per Box
WEAVE:	Non woven
COMPOSITION:	100% PET, (60% Recycled PET) adhesive back.
DIMENSIONS:	325mm (+/- 2mm) x 1300mm (+/- 2mm)
WEIGHT:	5.07 kg per Box
THICKNESS:	24mm +/- 7%
COVERAGE:	1.69 sqm per box

PERFORMANCE

COLOUR FASTNESS TO LIGHT:	ISO 105-B02-1994 Rating: 6-7
FIRE TEST:	ISO 9705: Group 1 ASTM E84 Unadhered: Class 2 or B
FABRIC CARE:	Blot excess spills from material quickly. Wipe with a damp cloth. If stain persists, apply small quantities of carpet or upholstery shampoo solution with a damp cloth. Blot well with a clean cloth after each application of the solution. Warning, avoid excessive amounts of water. Ensure adequate ventilation if the product is likely to be subject to excessive moisture.
SOUND ABSORPTION:	AS ISO 354 – 2006 NRC Value: 0.65 (with no air gap) NRC Value: 0.75 (with 20mm air gap) NRC Value: 0.85 (with 50mm air gap)



VOC EMISSIONS:

ASTM D5116 Rate: < 0.02 mg/m²/hr (7 days)



ENVIRONMENTAL:

EchoPanel® achieves GreenTag Certification
GreenRate: Level A

INSTALLATION:

Surface Preparation

Prior to installation, ensure the surface area to which the tiles are going to be fixed is smooth, clean and free from dust or any other contaminants that may impede the installation.


Tile Preparation

Balance 1300 has a directional finish in its manufacturing. It is recommended that the tile be installed with the grain facing in one direction; and are installed with desired grain orientation.

Fixing

Balance 1300 has an adhesive backing. Peel off the backing and stick on to substrate. Pressure should be used when applying to any substrate.

USE:

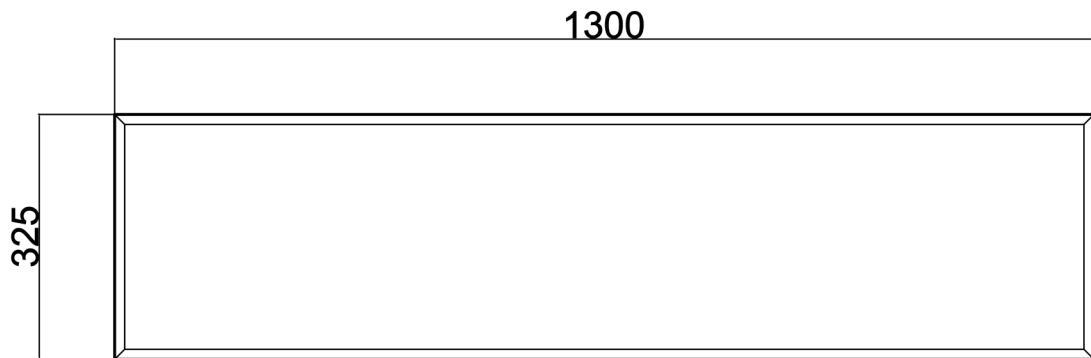



WOVEN IMAGE®

DESIGN DEPARTMENT - PRODUCT SPECIFICATION SHEET ISSUE DATE: 15.10.18

DESIGN NAME	Balance 650
DESIGNER:	Woven Image
ORIGIN:	Australia
COLOURS:	10
QUANTITY:	8 per Box
WEAVE:	Non woven
COMPOSITION:	100% PET, (60% Recycled PET) adhesive back.
DIMENSIONS:	325mm (+/- 2mm) x 650mm (+/- 2mm)
WEIGHT:	5.07 kg per Box
THICKNESS:	24mm +/- 7%
COVERAGE:	1.69 sqm per box

PERFORMANCE

COLOUR FASTNESS TO LIGHT:	ISO 105-B02-1994 Rating: 6-7
FIRE TEST:	ISO 9705: Group 1 ASTM E84Unadhered: Class 2 or B
FABRIC CARE:	Blot excess spills from material quickly. Wipe with a damp cloth. If stain persists, apply small quantities of carpet or upholstery shampoo solution with a damp cloth. Blot well with a clean cloth after each application of the solution. Warning, avoid excessive amounts of water. Ensure adequate ventilation if the product is likely to be subject to excessive moisture.
SOUND ABSORPTION:	AS ISO 354 – 2006 NRC Value: 0.65 (with no air gap) NRC Value: 0.75 (with 20mm air gap) NRC Value: 0.85 (with 50mm air gap)



VOC EMISSIONS:

ASTM D5116 Rate: < 0.02 mg/m²/hr (7 days)



ENVIRONMENTAL:

EchoPanel® achieves GreenTag Certification
GreenRate: Level A

INSTALLATION:

Surface Preparation

Prior to installation, ensure the surface area to which the tiles are going to be fixed is smooth, clean and free from dust or any other contaminants that may impede the installation.


Tile Preparation

Balance 650 has a directional finish in its manufacturing. It is recommended that the tile be installed with the grain facing in one direction; and are installed with desired grain orientation.

Fixing

Balance 650 has an adhesive backing. Peel off the backing and stick on to substrate. Pressure should be used when applying to any substrate.

USE:

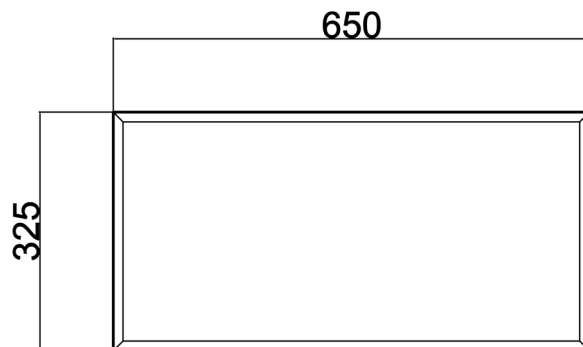



WOVEN IMAGE®

DESIGN DEPARTMENT - PRODUCT SPECIFICATION SHEET ISSUE DATE: 15.10.18

DESIGN NAME	Balance 325
DESIGNER:	Woven Image
ORIGIN:	Australia
COLOURS:	10
QUANTITY:	16 per Box
WEAVE:	Non woven
COMPOSITION:	100% PET, (60% Recycled PET) adhesive back.
DIMENSIONS:	325mm (+/- 2mm) x 325mm (+/- 2mm)
WEIGHT:	5.07 kg per Box
THICKNESS:	24mm +/- 7%
COVERAGE:	1.69 sqm per box

PERFORMANCE

COLOUR FASTNESS TO LIGHT:	ISO 105-B02-1994 Rating: 6-7
FIRE TEST:	ISO 9705: Group 1 ASTM E8 4Unadhered: Class 2 or B
FABRIC CARE:	Blot excess spills from material quickly. Wipe with a damp cloth. If stain persists, apply small quantities of carpet or upholstery shampoo solution with a damp cloth. Blot well with a clean cloth after each application of the solution. Warning, avoid excessive amounts of water. Ensure adequate ventilation if the product is likely to be subject to excessive moisture.
SOUND ABSORPTION:	AS ISO 354 – 2006 NRC Value: 0.65 (with no air gap) NRC Value: 0.75 (with 20mm air gap) NRC Value: 0.85 (with 50mm air gap)



VOC EMISSIONS:

ASTM D5116 Rate: < 0.02 mg/m²/hr (7 days)



ENVIRONMENTAL:

EchoPanel® achieves GreenTag Certification
GreenRate: Level A

INSTALLATION:

Surface Preparation

Prior to installation, ensure the surface area to which the tiles are going to be fixed is smooth, clean and free from dust or any other contaminants that may impede the installation.

Tile Preparation

Balance 325 has a directional finish in its manufacturing. It is recommended that the tile be installed with the grain facing in one direction; and are installed with desired grain orientation.

Fixing

Balance 325 has an adhesive backing. Peel off the backing and stick on to substrate. Pressure should be used when applying to any substrate.

USE:

