



IMPORTANT NOTE
Lifting eye / beam must be provided for lifting the guides into place. The eye / beam must be rated with a SWL of 500kg

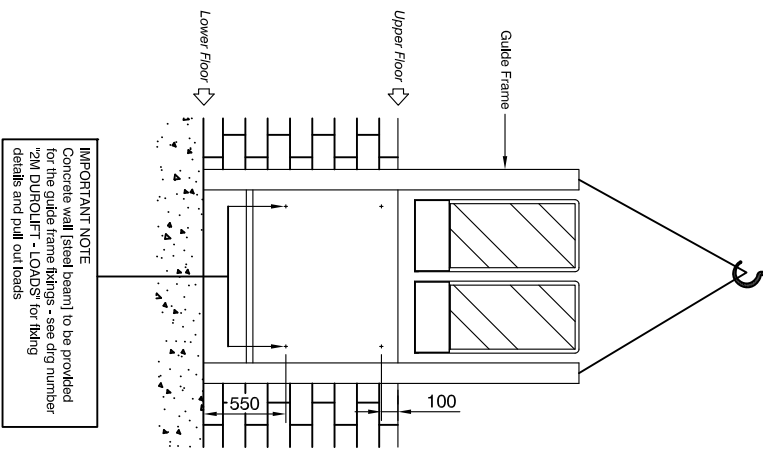

GUIDE FRAME FIXING DETAIL

Vertical Lift Platform Specification


- Load: 340kg / 2 persons
- Drive: Direct driven screw and nut
- Speed: 0.6m / sec
- Travel: Min 0.6m / Max 2m
- Stops: 2
- Motor: 1.1kw
- Power: 415v 3ph 50Hz 10A
- Colour: RAL 7031 as standard (alternative RAL colours available)

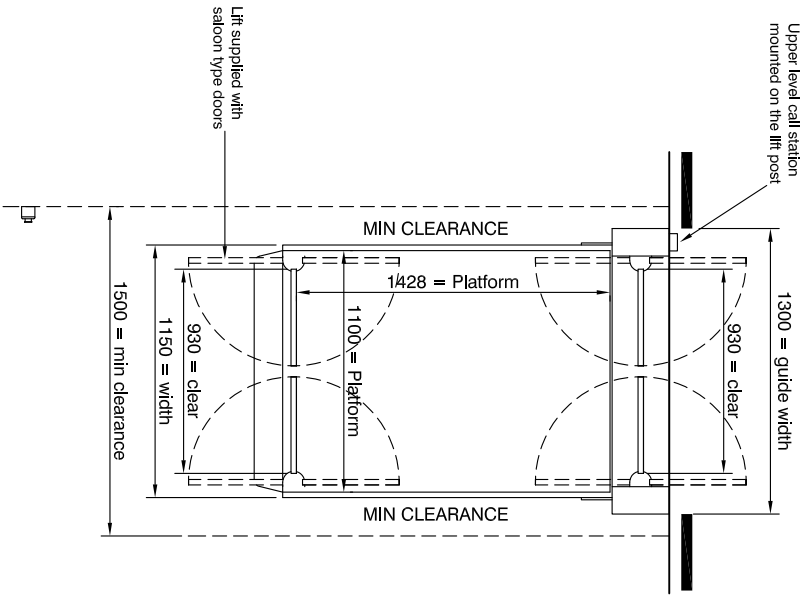

PLAN ELEVATION

Building work required

- 1 - Provide power supply
- 2 - Provide upper floor adequate for fixing the guides
- 3 - Provide level surface on lower and upper level

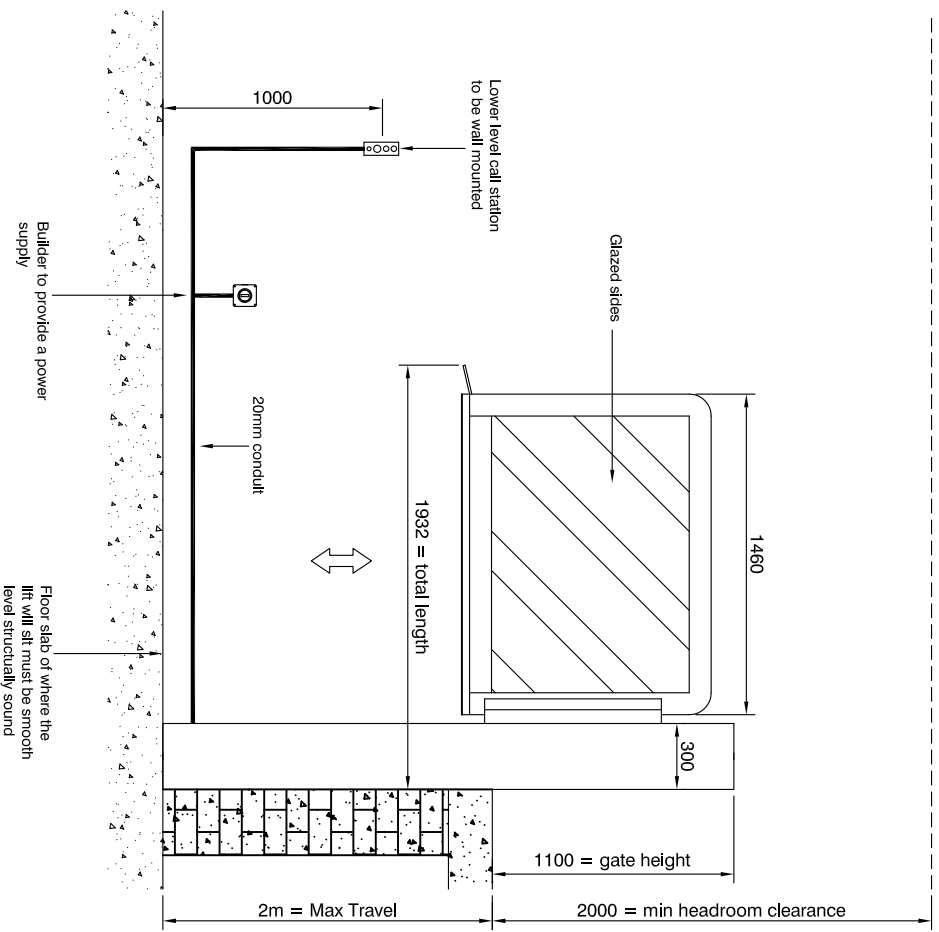

SIDE ELEVATION

		TITLE 2M DUROLIFT - THRU	
Unit 34, 49/51 Mitchell Road Bundoora NSW 2100 Tel 1300 884960 Fax +61 2 88805048 Email info@platformlift.com.au website - www.platformlift.com.au		DWG NO. 2M DUROLIFT - THRU	REV B
SCALE	NTS	DATE	27/05/2011
		DRAWN	CH