


DESIGN NAME	EchoPanel® Longitude
DESIGNER:	Woven Image
ORIGIN:	Australia
COLOURS:	31
WEAVE:	Non woven
COMPOSITION:	100% PET (60% recycled)
PANEL DIMENSIONS:	2750mm (+/- 2mm) x 1100mm (+/- 2mm)
WEIGHT:	7.1kg per panel (+/-10%)
THICKNESS:	12mm(+/-7%)




PERFORMANCE AS PER ECHOPANEL® 12MM

COLOUR FASTNESS TO LIGHT:	ISO 105-B02-1994 Rating: 6-7
FIRE TEST:	AS 1530.3 ISO 9705: Group 1 GB8624 B1 BS EN 13501.1: Classification B-s1, d0
FABRIC CARE:	Blot excess spills from material quickly. Wipe with a damp cloth. If stain persists, apply small quantities of carpet or upholstery shampoo solution with a damp cloth. Blot well with a clean cloth after each application of the solution. Warning, avoid excessive amounts of water. Ensure adequate ventilation if the product is likely to be subject to excessive moisture.
SOUND ABSORPTION:	AS ISO 354 – 2006 NRC Value: 0.45 (with no air gap) NRC Value: 0.60 (with 20mm air gap) NRC Value: 0.75 (with 50mm air gap)
VOC EMISSIONS:	ASTM D5116 Rate: < 0.02 mg/m ² /hr (7 days)
ENVIRONMENTAL:	EchoPanel® achieves GreenTag Certification GreenRate: Level A, Heath Rate Platinum.

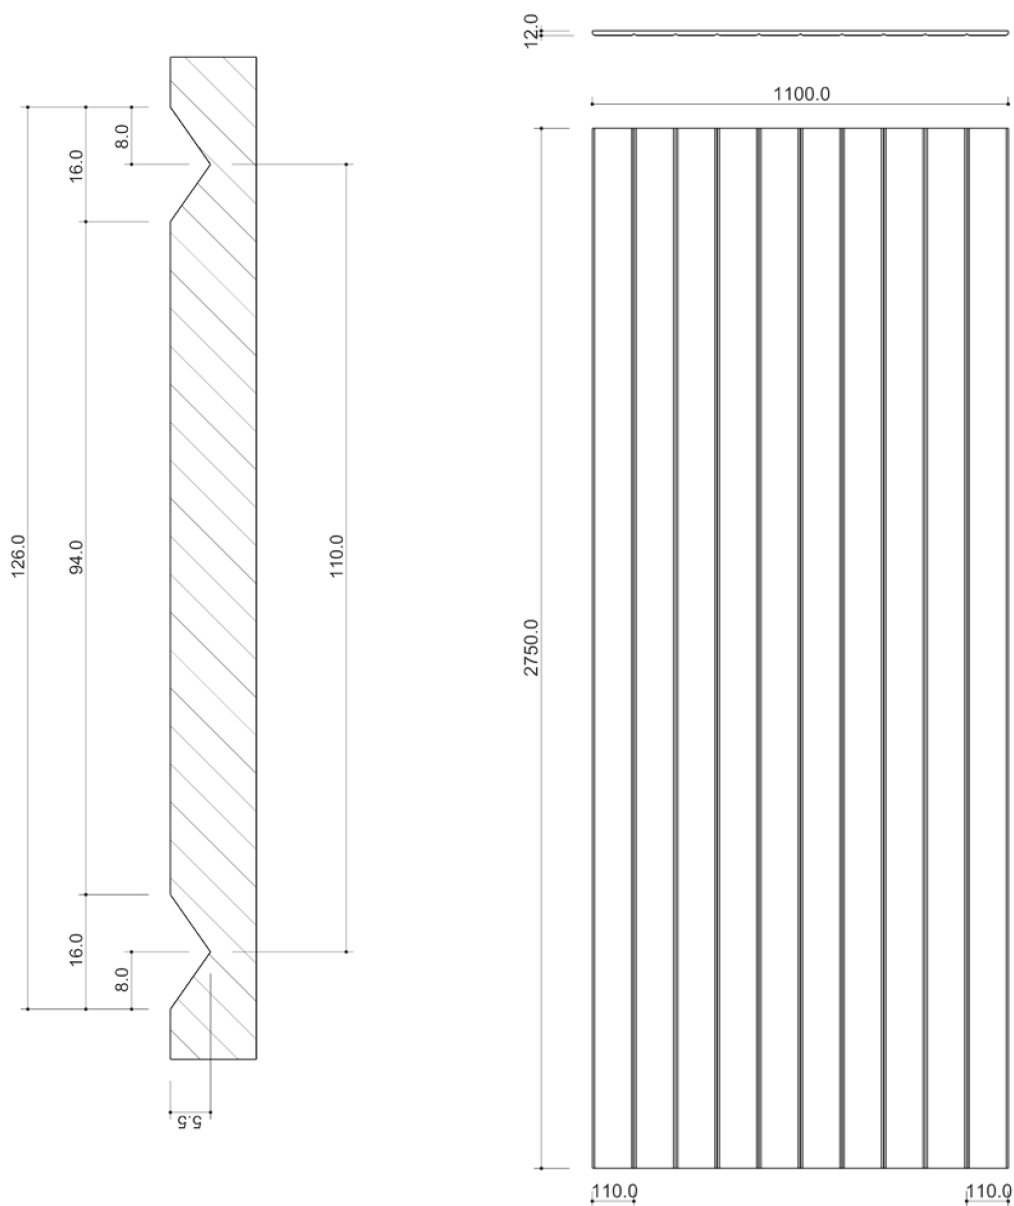

DESIGN NAME	EchoPanel® Meridian
DESIGNER:	Woven Image
ORIGIN:	Australia
COLOURS:	31
WEAVE:	Non woven
COMPOSITION:	100% PET (60% recycled)
PANEL DIMENSIONS:	2750mm (+/- 2mm) x 1100mm (+/- 2mm)
WEIGHT:	7.1kg per panel (+/-10%)
THICKNESS:	12mm(+/-7%)

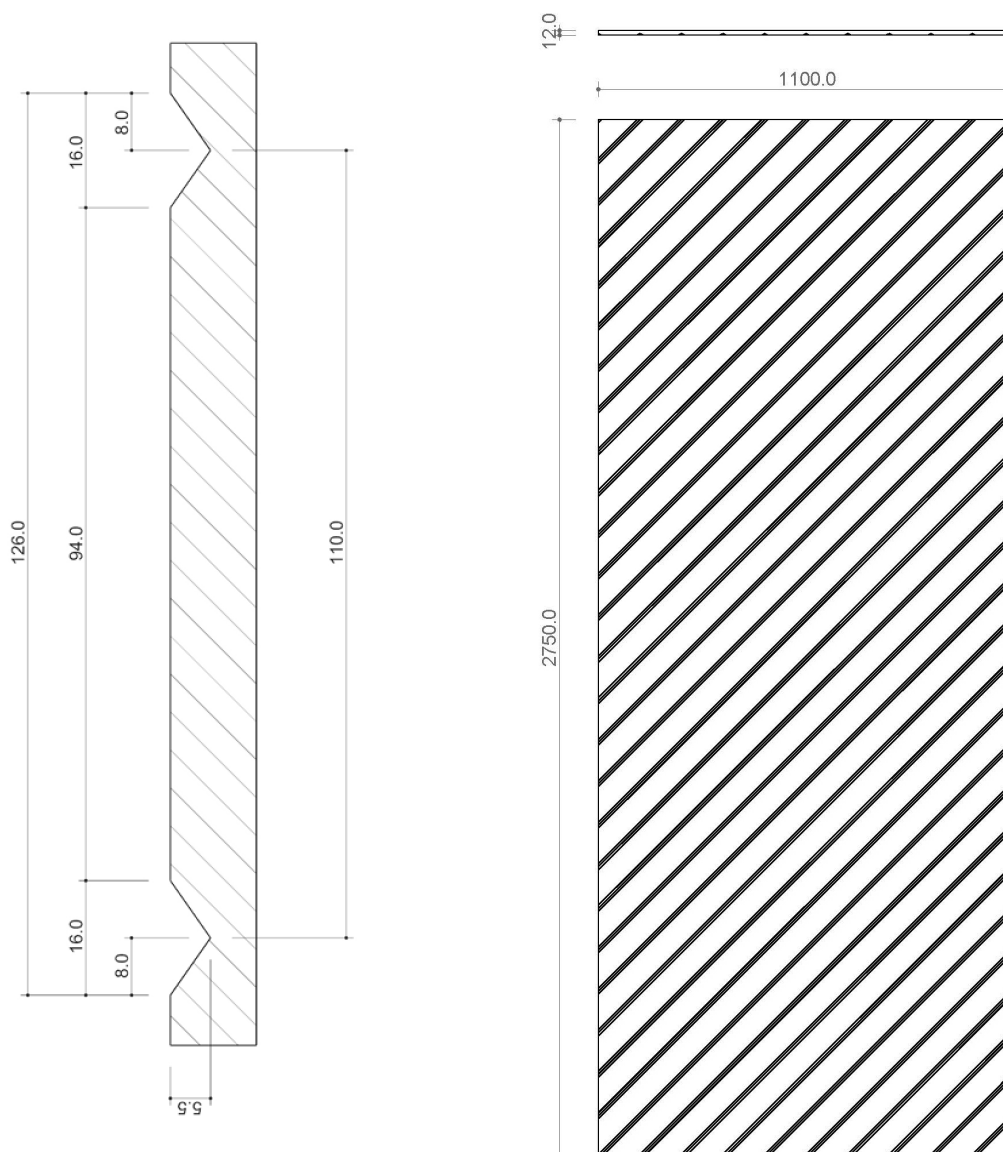

PERFORMANCE AS PER ECHOPANEL® 12MM

COLOUR FASTNESS TO LIGHT:	ISO 105-B02-1994 Rating: 6-7
FIRE TEST:	AS 1530.3 ISO 9705: Group 1 GB8624 B1 BS EN 13501.1: Classification B-s1, d0
FABRIC CARE:	Blot excess spills from material quickly. Wipe with a damp cloth. If stain persists, apply small quantities of carpet or upholstery shampoo solution with a damp cloth. Blot well with a clean cloth after each application of the solution. Warning, avoid excessive amounts of water. Ensure adequate ventilation if the product is likely to be subject to excessive moisture.
SOUND ABSORPTION:	AS ISO 354 – 2006 NRC Value: 0.45 (with no air gap) NRC Value: 0.60 (with 20mm air gap) NRC Value: 0.75 (with 50mm air gap)
VOC EMISSIONS:	ASTM D5116 Rate: < 0.02 mg/m ² /hr (7 days)
ENVIRONMENTAL:	EchoPanel® achieves GreenTag Certification GreenRate: Level A, Heath Rate Platinum.






WOVEN IMAGE®

DESIGN DEPARTMENT - PRODUCT SPECIFICATION SHEET

ISSUE DATE: 16.09.19

DESIGN NAME	EchoPanel® Latitude
DESIGNER:	Woven Image
ORIGIN:	Australia
COLOURS:	31
WEAVE:	Non woven
COMPOSITION:	100% PET (60% recycled)
PANEL DIMENSIONS:	2750mm (+/- 2mm) x 1100mm (+/- 2mm)
WEIGHT:	7.1kg per panel (+/-10%)
THICKNESS:	12mm (+/- 7%)

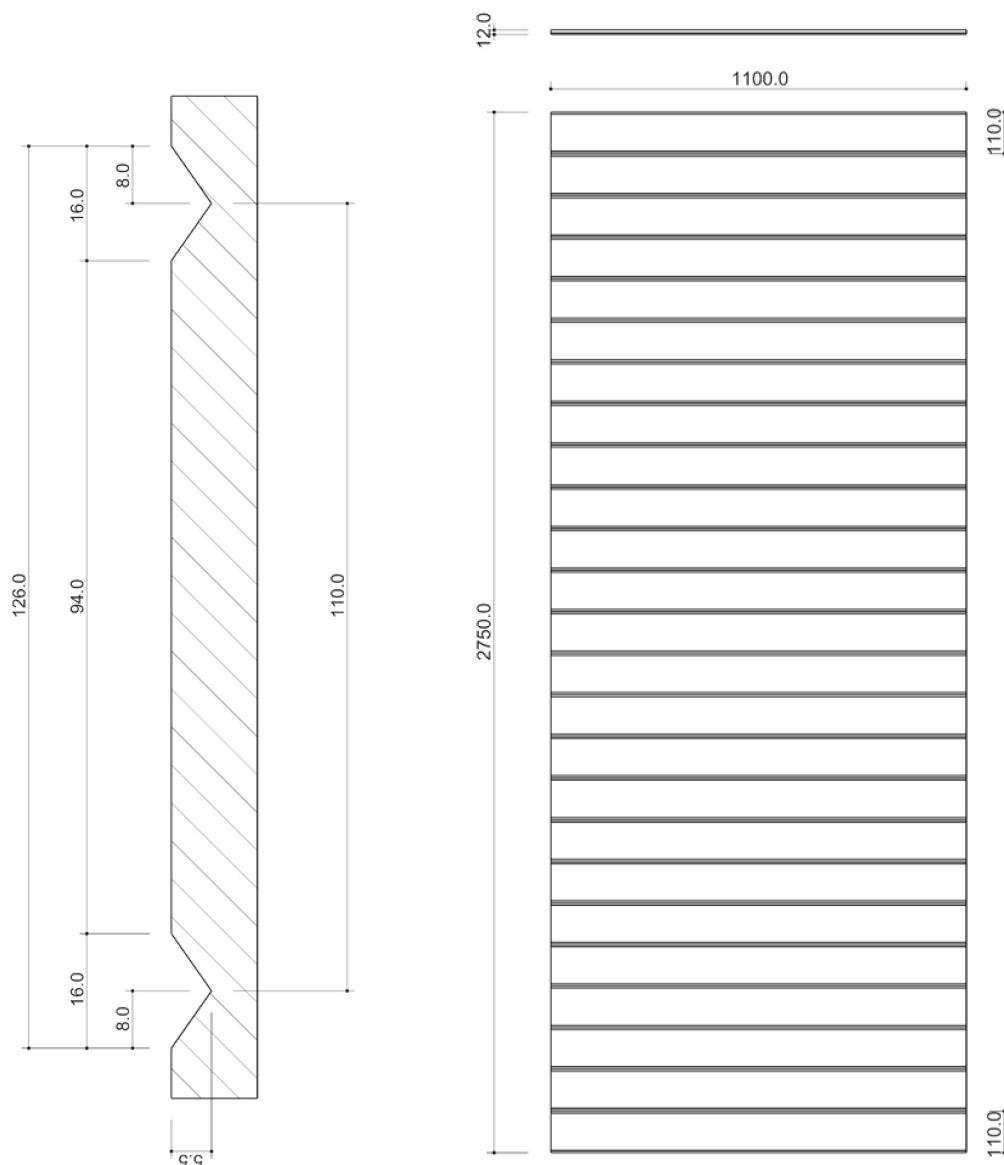

PERFORMANCE AS PER ECHOPANEL® 12MM

COLOUR FASTNESS TO LIGHT:	ISO 105-B02-1994 Rating: 6-7
FIRE TEST:	AS 1530.3 ISO 9705: Group 1 GB8624 B1 BS EN 13501.1: Classification B-s1, d0
FABRIC CARE:	Blot excess spills from material quickly. Wipe with a damp cloth. If stain persists, apply small quantities of carpet or upholstery shampoo solution with a damp cloth. Blot well with a clean cloth after each application of the solution. Warning, avoid excessive amounts of water. Ensure adequate ventilation if the product is likely to be subject to excessive moisture.
SOUND ABSORPTION:	AS ISO 354 – 2006 NRC Value: 0.45 (with no air gap) NRC Value: 0.60 (with 20mm air gap) NRC Value: 0.75 (with 50mm air gap)
VOC EMISSIONS:	ASTM D5116 Rate: < 0.02 mg/m ² /hr (7 days)
ENVIRONMENTAL:	EchoPanel® achieves GreenTag Certification GreenRate: Level A, Heath Rate Platinum.

