



Double Hung Window


The Select Range

The Carinya Select Double Hung Window is a distinctive combination of design and durability not previously available in the residential category.

Besides a modern designer look, the Carinya Select double hung window is packed with a multitude of performance features, many of which are simply not available in competing products:

- ✦ With a generous 92mm frame width this double hung is perfect for large openings up to 2.2 metres tall and 1 metre wide.
- ✦ The 92mm frame width allows for integrated screening within the width of the frame for a clean designer finish.
- ✦ Cleaning is a breeze. If required, both top and bottom sashes (or panels) can be removed thanks to special take out clips and a unique heavy duty sash balance system.
- ✦ The Carinya attention to detail includes bump stops to prevent frame damage, end caps to conceal sharp corners, as well as internal and external weather flaps that hide drainage slots and minimise insect intrusion.
- ✦ Full perimeter weather piles reduce air infiltration and improve acoustic performance.

The entire Carinya Collection has been fully tested to meet or exceed Australian Standards AS2047, AS1170, AS1191 and AS3959.

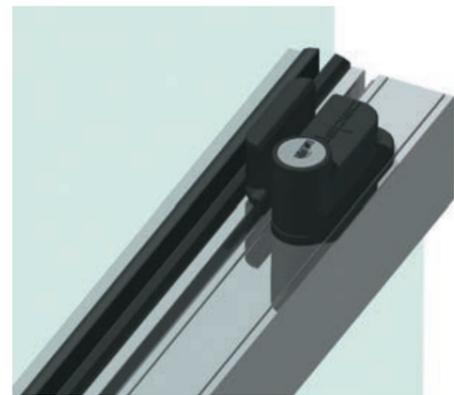

Alspec double hung latch with optional colours and keying options.



Easy take out clips on side jambs for removal of sash.

STREAMLINED HARDWARE

The Carinya Select Double Hung Window has been designed with matching stylish hardware, with the option for a lockable or non-lockable handle.

All Carinya double hung window sashes feature corner blocks in all four corners of the sashes. These blocks make the sash more rigid, reducing twist and movement. This reduction in movement increases the performance of the window by reducing opportunities for air, water and dust infiltration.

The balance system for the Carinya Select window is designed and manufactured for large and heavy windows. The balance features a unique "block and tackle" design that caters for heavy weights and will provide smooth operation of even large windows. As the balances are engineered for specific sizes and weights of windows, they require no adjusting during or after installation so as to provide long service for many years to come.

The innovative design of these balances means that they travel up and down with the windows and so they are not visible at any time. This design also means that both top and bottom sashes can be easily removed to allow easy cleaning of the window from inside the house.

Applications

- New residential construction.
- Window replacement and renovation.
- Low-rise building.

Specifications

- Maximum Sash Height: 1090mm
- Maximum Sash Width: 1000mm
- Maximum Single Glazed Thickness: 10.5mm
- Maximum Double Glazed Thickness: 18mm
- Maximum Sash Weight: 20kg
- *subject to site conditions

Options

- Choice of screening options with superior mesh solutions.
- Security or flyscreens securely fitted within the frame width.
- Integrated sidelights, highlights and lowlights.

Configurations

Your Carinya Dealer can offer the typical standard configurations below, as well as custom options to suit your requirements:

