

DESIGN DEPARTMENT - PRODUCT SPECIFICATION SHEET DATE: 18.6.19

DESIGN NAME:

DESIGNER:

ORIGIN:

COLOURS:

ASSEMBLED DIMENSION:

PANEL THICKNESS:

WEIGHT:


KIT CONTENTS:


Woven Image
Australia/China
10 x EchoPanel® 24mm
2350mm (+/- 2mm) x 2350mm (+/-2mm) x 215mm (+/- 2mm)
24mm +/- 7%
14kg per kit

EchoPanel® Element


8 x Cut EchoPanel® Blades (100% PET 60% Recycled) 16 x 24mm Ceiling Clips (ABS plastic) 1 x Installation guide

2350

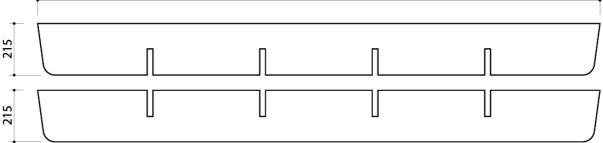




EXPLODED VIEW



ASSEMBLED VIEW





PERFORMANCE

COLOUR FASTNESS TO LIGHT:	ISO 105-B02-1994 Rating: 6-7
FIRE TEST:	ISO 9705: Group 1 ASTM E84 Unadhered: Class 2 or B BS EN 13501.1: Classification B-s1, d0
FABRIC CARE:	Blot excess spills from material quickly. Wipe with a damp cloth. If stain persists, apply small quantities of carpet or upholstery shampoo solution with a damp cloth. Blot well with a clean cloth after each application of the solution. Warning, avoid excessive amounts of water. Ensure adequate ventilation if the product is likely to be subject to excessive moisture.
SOUND ABSORPTION:	Weighted sound absorption coefficient as defined by ISO 11654 standard (direct fix): 0.40 Sound Absorption Average as defined by ASTM C423 (direct fix): 0.37 Noise Reduction Coefficient (direct fix): 0.40
VOC EMMISSIONS:	ASTM D5116 Rate: < 0.02 mg/m²/hr (7 days)
ENVIRONMENTAL:	EchoPanel [®] achieves GreenTag Certification GreenRate: Level A

OVERALL ASSEMBLY:

