

| SCHÖNOX AB and iFIX® Waterproofing System

| Watertight Shower Assembly



| The Rollable Waterproofing Sealing Adhesive


| SCHÖNOX iFIX® and SCHÖNOX AB – watertight balconies and terraces. |

SCHÖNOX iFIX® and SCHÖNOX AB create the perfect alliance against all weather conditions.

For more instruction details see product data sheet.




Bonding SCHÖNOX AB with SCHÖNOX iFIX®.

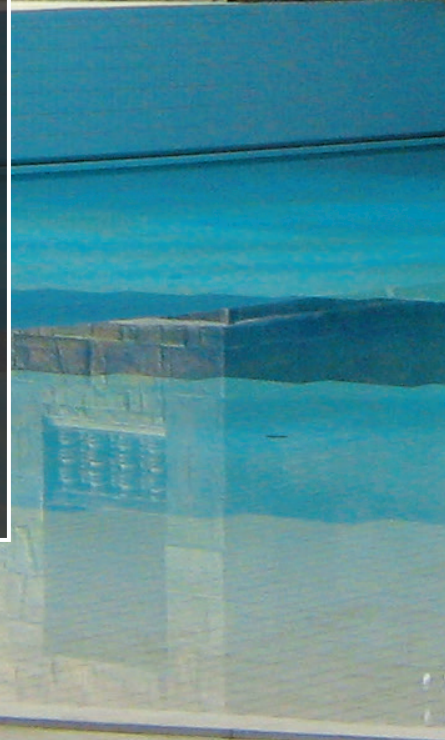

| The Rollable Waterproofing Sealing Adhesive

| Sealing of plumbing with SCHÖNOX iFIX®

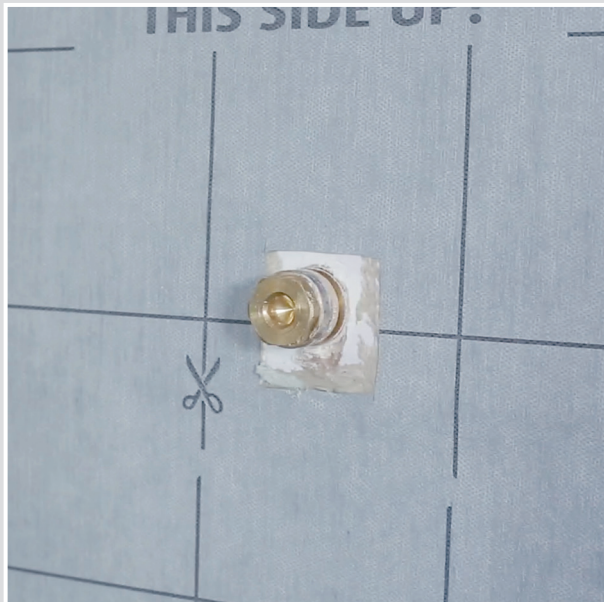

1 Cut a hole in SCHÖNOX AB and fix it with SCHÖNOX iFIX®.



2 Apply SCHÖNOX iFIX® with the SCHÖNOX ROLLER 100 mm around the plumbing. Insert SCHÖNOX ST DEHNZONENMANSCHETTEN and press it on.



PRACTICE TIP

We recommend the different drain sealing cuffs SCHÖNOX ST D depending on the diameter of the pipe.



3 Finally revise details with SCHÖNOX iFIX®.


| Sealing of floor drains with SCHÖNOX iFIX®



1 Apply SCHÖNOX iFIX® with the SCHÖNOX ROLLER 100 mm around the floor drain.



2 Insert the drain sealing cuff and press it on.

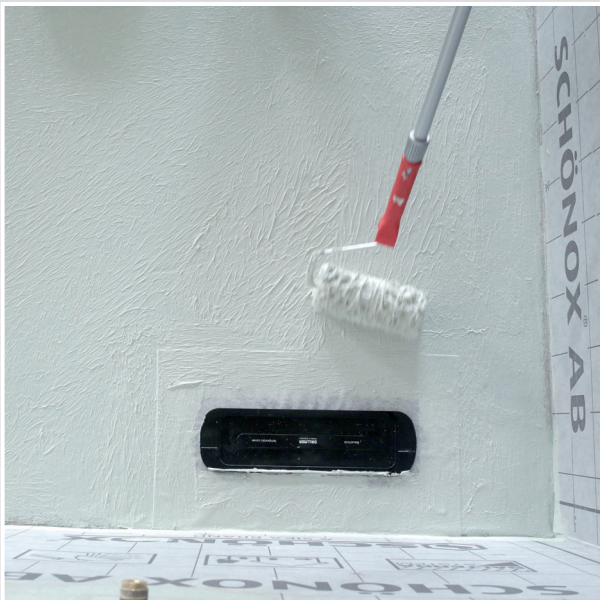

3 Apply SCHÖNOX iFIX® with the SCHÖNOX ROLLER 180 mm and insert SCHÖNOX AB on the sealing cuff with at least 5 cm overlapping.



PRACTICE TIP

Please begin with sealing floor drains before you start sealing the surface with SCHÖNOX iFIX® and SCHÖNOX AB.



When installing floor drains we recommend obtaining further information from the manufacturer.



PRACTICE TIP

| ...and sealing in chemically loaded areas |

Sealing in chemical areas represent a big challenge. The combination of SCHÖNOX iFIX® and SCHÖNOX AB is the right solution for these challenging-application. It is important to glue SCHÖNOX AB with abutting. For this it is recommended to glue SCHÖNOX ST SEALING TAPE in the corner region of wall/wall and wall/floor as well as in the joint area. It is essential to avoid cavities in the joint area. For more instruction details see product data sheet.

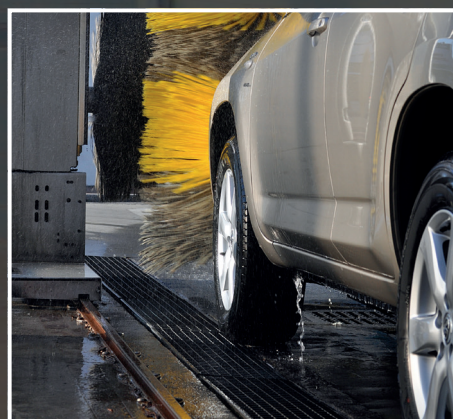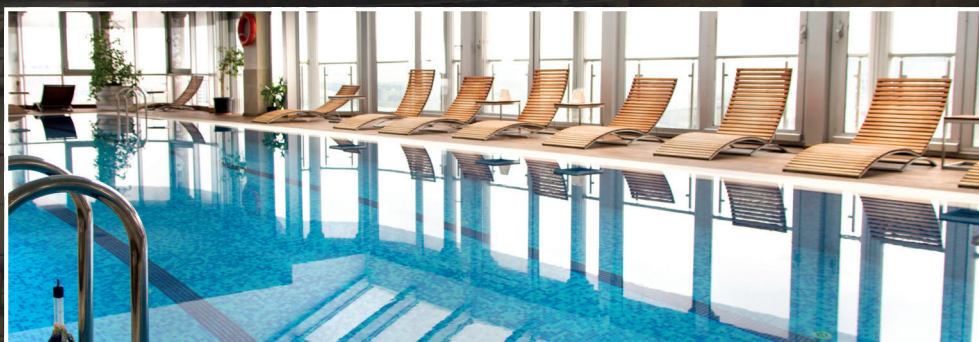

| The Rollable Waterproofing Sealing Adhesive

Contains every component needed to construct a maintenance-free, watertight shower assembly. However small or large areas, SCHÖNOX iFIX® is a good solution for swimming pools, balconies and terraces.

| Surface Sealing with SCHÖNOX iFIX® and SCHÖNOX AB



1 Apply SCHÖNOX iFIX® with the SCHÖNOX iFIX® ROLLER 180 mm in an upright position.



2 Insert the sheet membrane SCHÖNOX AB into the fresh sealing adhesive (overlapping 5 cm).



PRACTICE TIP

For optimal fixing we recommend the SCHÖNOX iFIX® TOOLBOX consisting of SCHÖNOX iFIX® roller 100 and 180 mm, SCHÖNOX iFIX® Tool, protective gloves and cutter knife.



3 Afterwards press SCHÖNOX AB gently to avoid air bubbles beneath. Remove excess material.

| Details with SCHÖNOX iFIX® and SCHÖNOX System Components



1 Apply SCHÖNOX iFIX® with the SCHÖNOX iFIX® ROLLER 100 mm in the corners.



2 Insert the components like SCHÖNOX ST IC INTERIOR CORNER/SCHÖNOX ST EA EXTERIOR CORNER and avoid air bubbles beneath.



3 Proceed in the same way with SCHÖNOX ST SEALING TAPE for wall- and wall-/floor connections.

| Bonding sealing tapes and seal overlapping - all in one! |



SCHÖNOX iFIX® - The Rollable Waterproofing Sealing Adhesive

Product characteristics:

- Self cross-linking, hydraulic rapid hardening
- For interior and exterior use
- Solvent free
- Highly flexible & crack bridging
- Decoupling mate

Applications:


- In residential wet areas (bathrooms and showers)
- On balconies and terraces
- In heavy loaded commercial wet rooms (such as public shower rooms or therapy rooms in hospitals)
- In swimming pools prior to the installation of ceramic tiles. Approved for pool depth of 10 m (in combination of SCHÖNOX AB)

Your advantages:

- One sealing adhesives for all areas
- Health-friendly application, dust-reduced
- Ergonomic application in an upright position
- Saving 40% of your working time
- Saving material & easy to apply with a roller
- Reduced storage and transportation costs due to low material consumption
- Saving material & easy to apply with a roller
- Fully Compatible with Sika® / CTA™ Tile Adhesives
- Suitable for instant tile Installation
- Tested to AS/NZ 4858 Class III
- Up to 5mm crack bridging



Foto: Deutsche Steinzeug

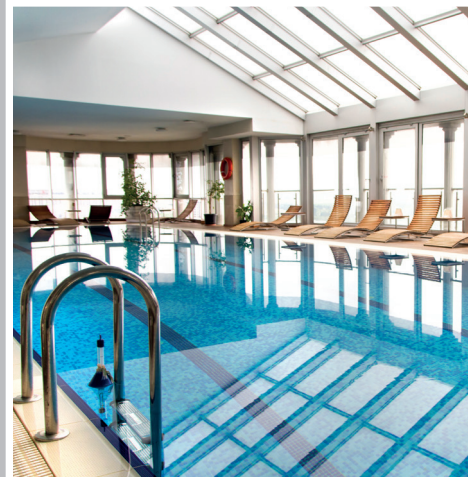

Sika Australia Pty Ltd

55 Elizabeth Street
Wetherill Park NSW 2164
1300 22 33 48
aus.sika.com

