

Composition™ is manufactured by Autex Industries Ltd and Autex Pty Ltd under an ISO 9001 accredited Quality Management System. The product is guaranteed to be free from manufacturing defects and carries a Manufacturer's Guarantee for a period of no less than ten years to meet all of the performance properties stated within this guarantee.

<b>Product Name</b>	Composition™
<b>Description</b>	100% polyester needle punched, thermally bonded wallcovering
<b>Roll Dimensions</b>	1.22m x 25m
<b>Thickness</b>	10-12mm
<b>Weight</b>	Typically 1600gsm

**Composition**  
100% Polyester Fibre from polyethylene terephthalate (PET). Composition™ contains a minimum of 60% recycled polyester fibre.

#### Suitable applications

Pinboards, hook-and-loop receptive surface, acoustic wallcovering. Accepts pins and staples.

#### Colour Fastness to Light

Composition™ is suitable for indoor use only. Colour and light fastness are dependent on use and exposure. Vertiface® has been tested and is guaranteed to perform to the following standards:

##### TSL 9002

Light Fastness Rating: 6-7 (7 = highest)

##### ISO105-B02-1994 (Grey Scale 1-5):

Light Fastness Rating: 3

#### Colour Fastness to Rubbing

AS2001.4.3 | Wet 4-5 | Dry 4-5 (5 = highest)

#### Fire Ratings

##### ISO 9705: 1993

Classification: Group 1-S  
Smoke Production Rate: <5.0m<sup>2</sup>/s  
As required by NZBC C/VM2

##### AS ISO 9705 - 2003

Classification: Group 1  
(SMOGR<sub>ARC</sub>): <100m<sup>2</sup>/s<sup>2</sup>  
As required by BCA C1.10  
Fl 4894 dated 6th June, 2012

##### EN13501-1:2009+A1:2009

B - s1, d0  
Report 189053 dated 7th December, 2009


#### Impact Resistance

Composition™ has been impact resistance tested to EN 13964:2004 and meets the criteria of Class 1A; not adversely affected at impact velocities over 16.5m/s.

#### Acoustic Performance

Composition™ is specifically designed to reduce and control reverberated (echo) noise in building interiors.

Noise Reduction Coefficient 0.40

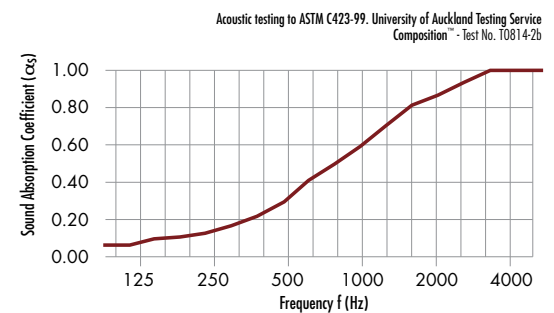

Frequency (Hz)	125	250	500	1000	2000	4000	NRC
Composition®	0.05	0.10	0.25	0.55	0.80	0.95	0.40

#### Toxicity

Polyester is classed as no more toxic than wood under the state of New York Article 15 part 1120. Polyester is pH7.8 (where pH7.0 is neutral), resistant to biological, bacterial or vermin attack.

#### Finish

Non-woven. No pattern repeat but Composition™ has a directional grain. Product may vary from samples and batch to batch due to fibre blending and lay-up which is an inherent feature of this product.

#### Physical description / properties

Boiling Point:	N/A
Melting Point:	230°C
Vapour Pressure:	N/A
Specific Gravity:	Polyester 1.38
Flash point:	N/A
Explosive limits:	N/A
Solubility in water:	Not soluble
Alkalinity:	pH 7.8
Relative Vapour Density:	N/A

#### Care and Maintenance

Maintain in accordance with the Care and Maintenance Guide available for this product.

To ensure your Composition™ Warranty can be issued, please complete the following:

- Post Installation Audit
- Job Sign Off Completed

Comments: \_\_\_\_\_

\_\_\_\_\_

\_\_\_\_\_

\_\_\_\_\_

\_\_\_\_\_

\_\_\_\_\_

Please complete and attach the information below and keep in a safe place.  
 Incomplete or missing information may void your warranty.

Architect: \_\_\_\_\_

Project Manager: \_\_\_\_\_

Application Type:

- Hospitality
- Education
- Commercial
- Health Care
- Retail
- Other: \_\_\_\_\_

Installation Address: \_\_\_\_\_

Installed by: \_\_\_\_\_

Contact Email: \_\_\_\_\_

Contact Number: \_\_\_\_\_ Install Date: \_\_\_\_\_

Product(s) Installed	Quantity
_____	_____
_____	_____
_____	_____
_____	_____
_____	_____

Location(s): \_\_\_\_\_

\_\_\_\_\_

Please attach at least one roll label from each type of product installed.

Products purchased from: \_\_\_\_\_

Date of purchase: \_\_\_\_\_

Please attach the purchase receipt as proof of purchase.



AN ISO 9001 AND ISO 14001 ACCREDITED COMPANY

**Autex Industries Ltd**  
 702-718 Rosebank Rd  
 Private Bag 19988  
 Avondale 1746, Auckland  
 New Zealand  
 Freephone **0800 428 839**  
 Phone **+64 9 828 9179**  
 Fax **+64 9 828 5810**  
[www.autex.co.nz](http://www.autex.co.nz)

**Autex Pty Ltd**  
 166 Barnfield Road  
 PO Box 5099  
 West Heidelberg, Melbourne  
 VIC 3081, Australia  
 Freephone **1800 678 160**  
 Phone **+61 3 9457 6700**  
 Fax **+61 3 9457 1020**  
[www.autex.com.au](http://www.autex.com.au)

**Autex Acoustics Ltd**  
 Unit 1 Alchemy Industrial Est.  
 Platinum Court, Alchemy Way  
 Liverpool, L33 7XN  
 United Kingdom  
 Phone **+44 151 294 3236**  
 Fax **+44 151 546 0863**  
[www.autexacoustics.co.uk](http://www.autexacoustics.co.uk)

**Autex Acoustics LLC**  
 California  
 USA  
 Phone **+1 805 407 9256**  
 Fax **+1 805 457 8932**  
[www.autexacoustics.com](http://www.autexacoustics.com)