



WOVEN IMAGE®

DESIGN DEPARTMENT - PRODUCT SPECIFICATION SHEET ISSUE DATE: 9.9.20

DESIGN NAME: Zen

DESIGNER: Woven Image

ORIGIN: Australia

COLOURS: 10

DESCRIPTION: Non woven panel, embossed texture one side. 5 degree bevelled edge on all four sides.

COMPOSITION: 100% PET (60% recycled)

PANEL DIMENSIONS: 2800mm (+/- 2mm) x 1130mm (+/- 2mm)

WEIGHT: One panel: 2475g/m² (approx. 7.83kg/panel) +/-10%
Box of 5 panels: approx. 46kgs
Packed pallet of 25 panels: approx. 260kgs

THICKNESS: 9mm +/- 7%

PERFORMANCE

COLOUR FASTNESS TO LIGHT: ISO 105-B02-1994 Rating: 6

COLOUR FASTNESS TO RUBBING: ISO 105-X12 Rating: Wet: 4/5, Dry: 5

FIRE TEST: ISO 9705: Group 3
BS EN 13501.1 Classification: D-s3, d0

FABRIC CARE: See wovenimage.com

SOUND ABSORPTION: AS ISO 354 – 2006

	Direct	20mm air gap	50mm air gap
NRC	0.30	0.50	0.65
αw	0.20 (H)	0.45 (MH)	0.70

Achieves an NRC 0.70 – 0.75 and αw 0.75 with a 15mm and 25mm acoustic infill respectively. (minimum order and lead times may apply)

FORMALDEHYDE: ISO 14184.1-2011: Nil Detected


VOC EMISSIONS: ASTM D5116 Rate: 0.023 mg/m²/hr (7 days)



ENVIRONMENTAL:



To assist in accurate pattern matching on a continuous wall, ZEN has been trimmed on all four sides with a unique 5 degree bevel as shown below. Dimensions shown in millimetres.

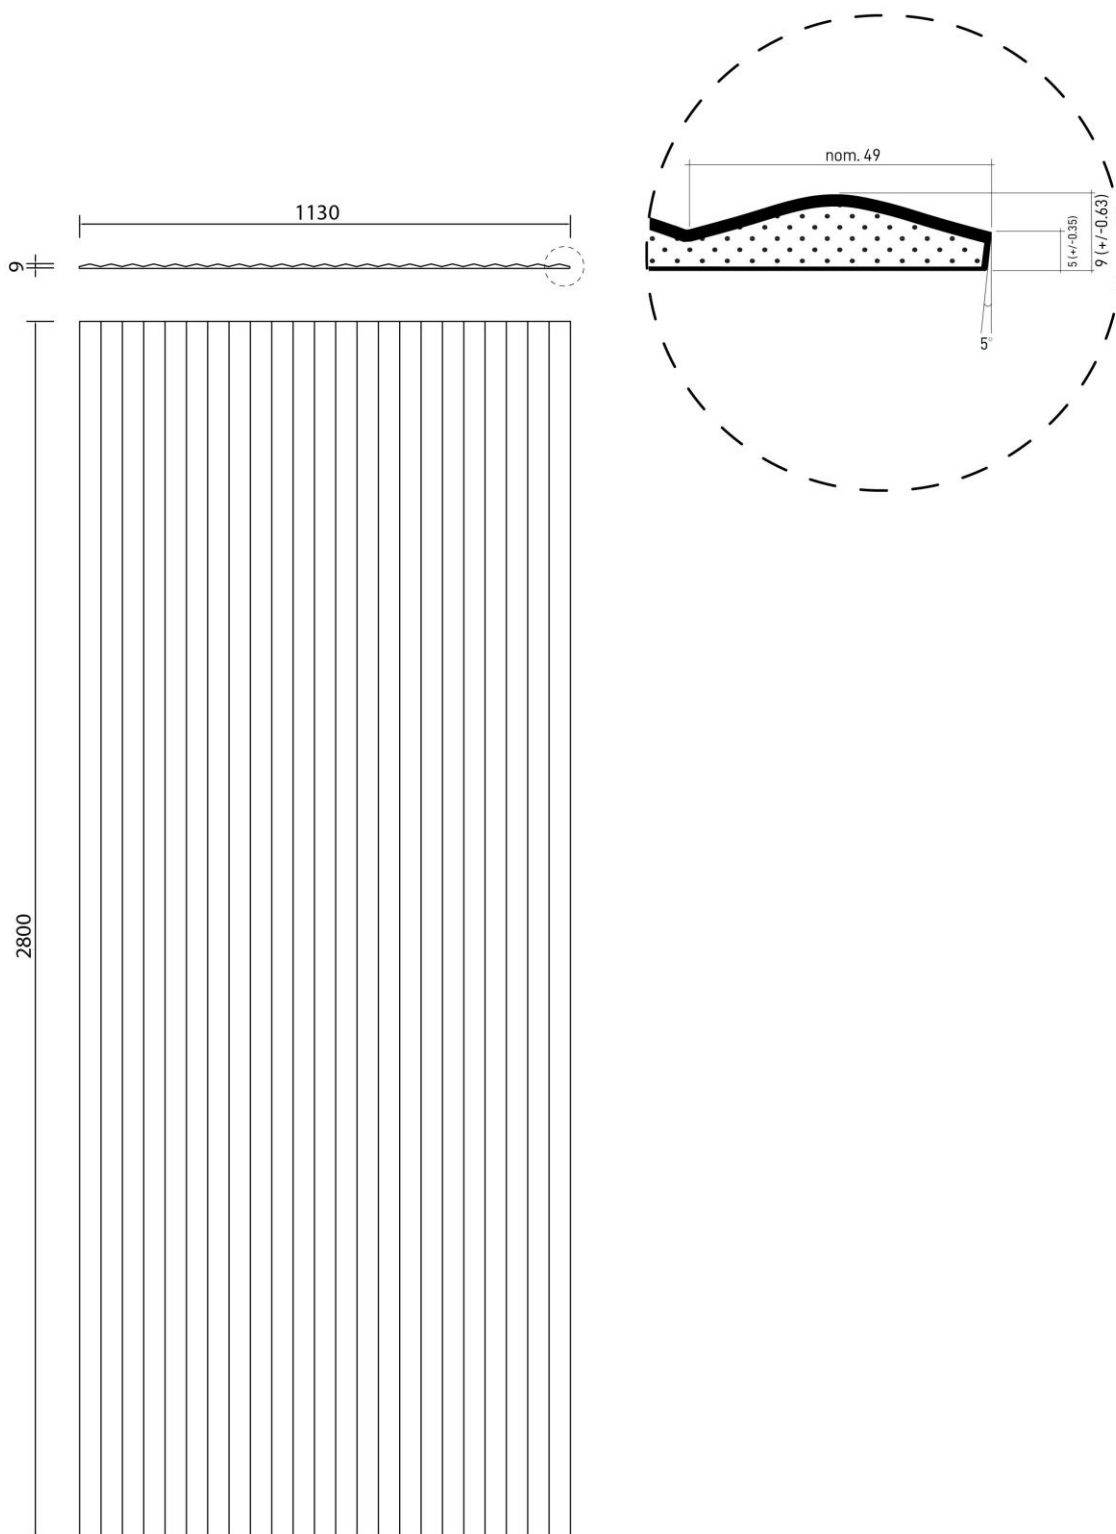



WOVEN IMAGE®

DESIGN DEPARTMENT - PRODUCT SPECIFICATION SHEET ISSUE DATE: 9.9.20

DESIGN NAME: Gem

DESIGNER: Woven Image

ORIGIN: Australia

COLOURS: 9

DESCRIPTION: Non-woven panel, embossed texture one side. Straight cut edges.

COMPOSITION: 100% PET (60% recycled)

PANEL DIMENSIONS: 2800mm (+/- 3mm) x 1130mm (+/- 3mm)

WEIGHT: One panel: 2475g/m² (approx. 7.83kg/panel) +/-10%
Box of 5 panels: approx. 46kgs
Packed pallet of 25 panels: approx. 260kgs

THICKNESS: 9mm +/- 7%

PERFORMANCE

COLOUR FASTNESS TO LIGHT: ISO 105-B02-1994 Rating: 6

COLOUR FASTNESS TO RUBBING: ISO 105-X12 Rating: Wet: 4/5, Dry: 5

FIRE TEST: ISO 9705: Group 3
BS EN 13501.1 Classification: D-s3, d0

FABRIC CARE: See wovenimage.com

SOUND ABSORPTION: AS ISO 354 – 2006

	Direct	20mm air gap	50mm air gap
NRC	0.25	0.50	0.65
αw	0.20 (H)	0.45 (MH)	0.70

Achieves an NRC 0.70 – 0.75 and αw 0.75 with a 15mm and 25mm acoustic infill respectively. (minimum order and lead times may apply)

FORMALDEHYDE: ISO 14184.1-2011: Nil Detected

VOC EMISSIONS: ASTM D5116 Rate: 0.023 mg/m²/hr (7 days)



ENVIRONMENTAL:





WOVEN IMAGE®

DESIGN DEPARTMENT - PRODUCT SPECIFICATION SHEET

ISSUE DATE: 9.9.20

DESIGN NAME: Ion

DESIGNER: Woven Image

ORIGIN: Australia

COLOURS: 7

DESCRIPTION: Non woven panel, embossed texture one side. Straight cut edge on all four sides.

COMPOSITION: 100% PET (60% recycled)

PANEL DIMENSIONS: 2800mm (+/- 3mm) x 1130mm (+/- 3mm)

WEIGHT: One panel: 2475g/m² (approx. 7.83kg/panel) +/-10%
Box of 5 panels: approx. 46kgs
Packed pallet of 25 panels: approx. 260kgs

THICKNESS: 9mm +/- 7%

PERFORMANCE

COLOUR FASTNESS TO LIGHT: ISO 105-B02-1994 Rating: 6

COLOUR FASTNESS TO RUBBING: ISO 105-X12 Rating: Wet: 4/5, Dry: 5

FIRE TEST: ISO 9705: Group 3
BS EN 13501.1 Classification: D-s3, d0

FABRIC CARE: See wovenimage.com

SOUND ABSORPTION: AS ISO 354 – 2006

	Direct	20mm air gap	50mm air gap
NRC	0.25	0.50	0.65
αw	0.20 (H)	0.45 (MH)	0.70

Achieves an NRC 0.70 – 0.75 and αw 0.75 with a 15mm and 25mm acoustic infill respectively. (minimum order and lead times may apply)

FORMALDEHYDE: ISO 14184.1-2011: Nil Detected


VOC EMISSIONS: ASTM D5116 Rate: 0.023 mg/m²/hr (7 days)



ENVIRONMENTAL:



To assist in accurate pattern matching on a continuous wall, Ion has been trimmed on all four sides with a straight cut edge. Dimensions shown in millimetres.

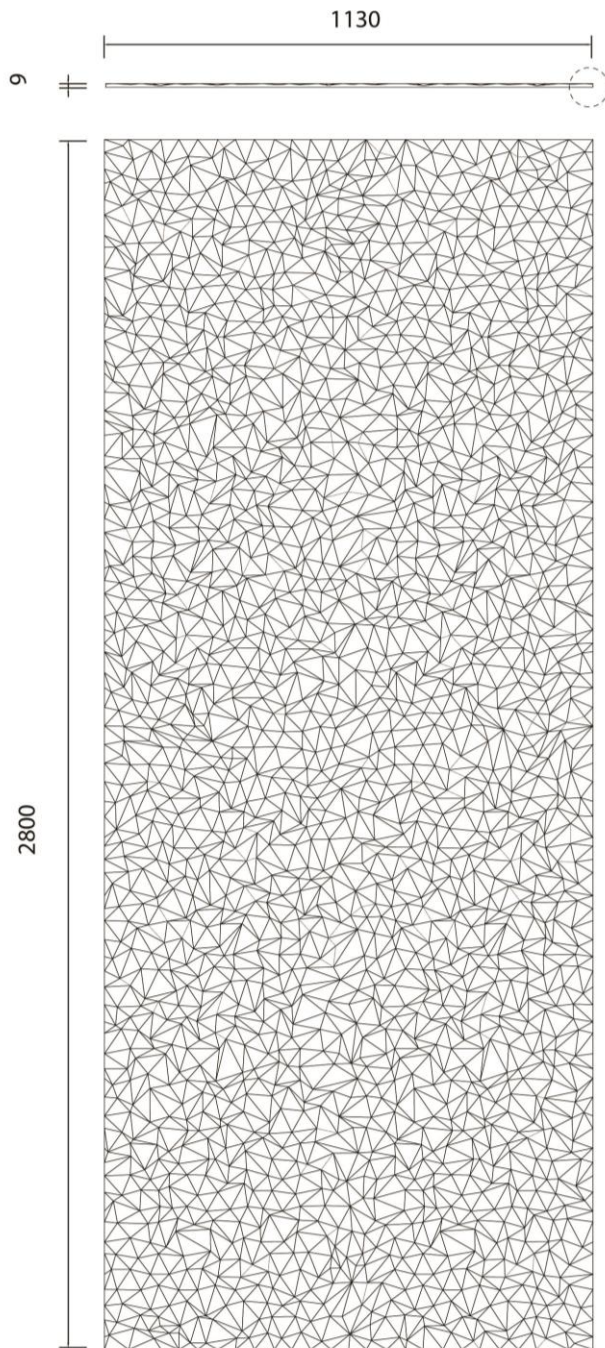

To assist in accurate pattern matching on a continuous wall, Gem has been trimmed on all four sides using a straight knife. Dimensions shown in millimetres.

