

Inspiring Great Spaces™



COMMERCIAL FLOORING



Australian Made

AUSTRALIS™


HOMOGENEOUS VINYL SHEET

AUSTRALIS™


(2.00m x 1.83m x 16m sheet)



P3* X* R10* SLIP RESISTANCE

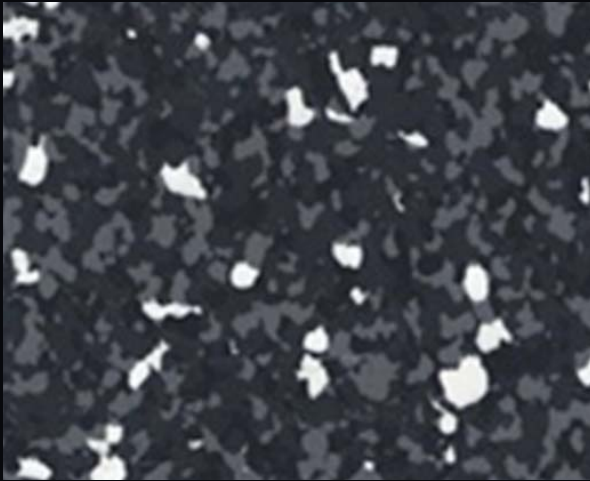

NEWCASTLE COAL

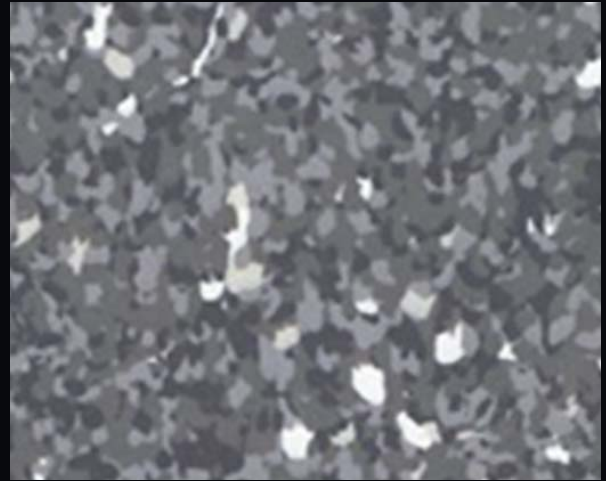

HERVEY GREY




COORONG GREY



DUBBO GREY



GARDINER WHITE

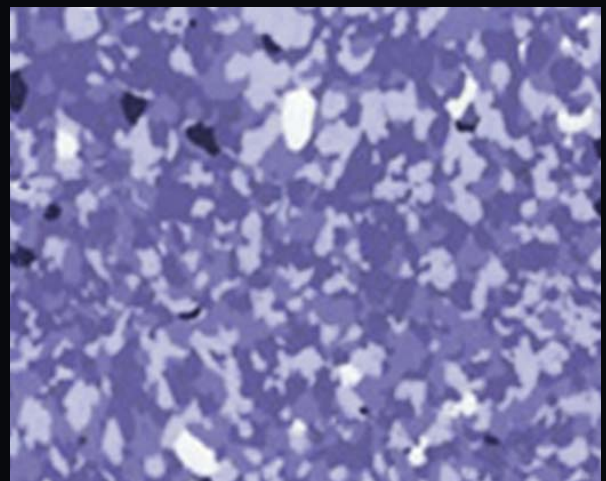

ANDAMOOKA PURPLE

Variations may occur between photographic images, samples and batches in terms of colour, shade, pattern or similar. Dimensions are nominal.

AUSTRALIS™

(2.00mm x 1.83m x 16m sheet)



P3*


X*

R10*

SLIP RESISTANCE



STOCKTON BEACH

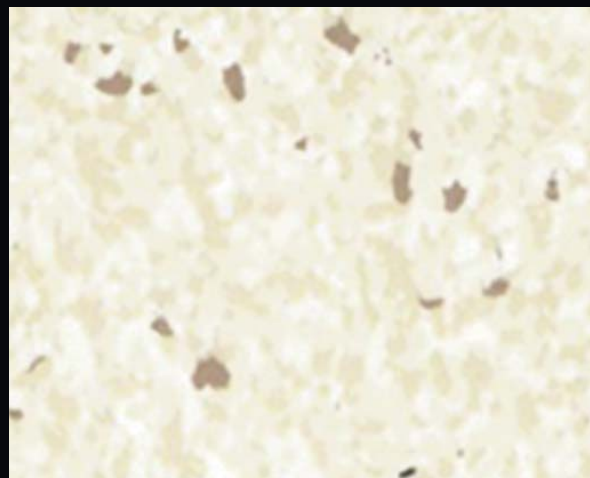


FRASER SAND




GOULBURN BEIGE



LITHGOW BEIGE

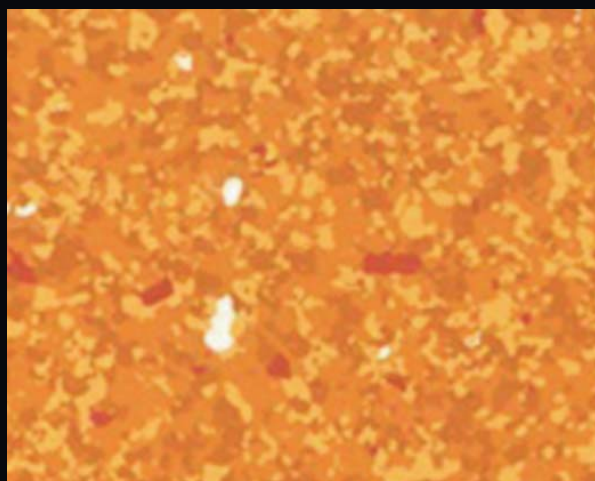

KALBARRI SUNSET

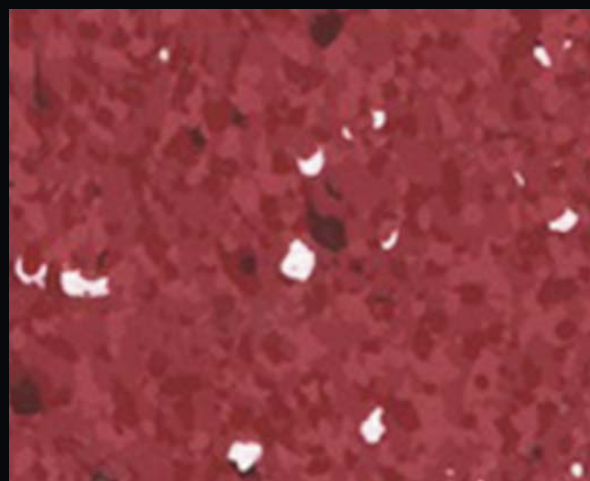


RED HILL

AUSTRALIS™

(2.00mm x 1.83m x 16m sheet)




P3* X* R10* SLIP RESISTANCE

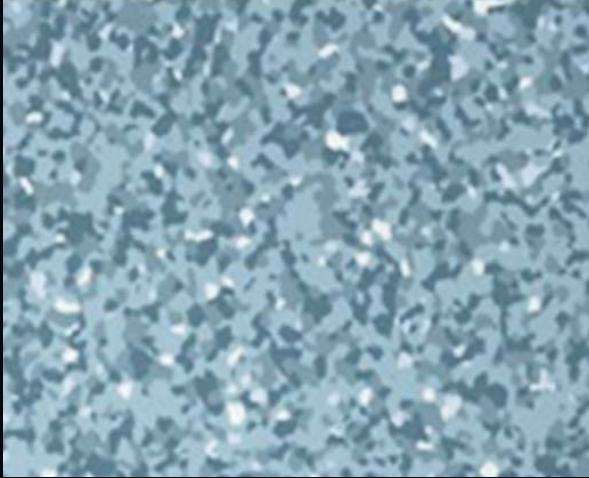


GREEN ISLAND



KING ISLAND BLUE

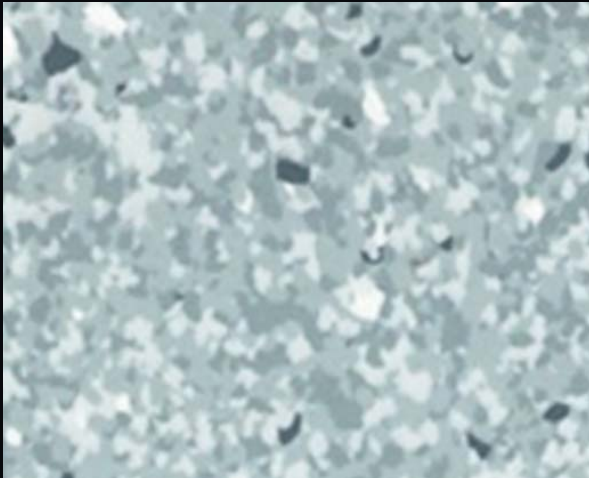


MACQUARIE GREEN

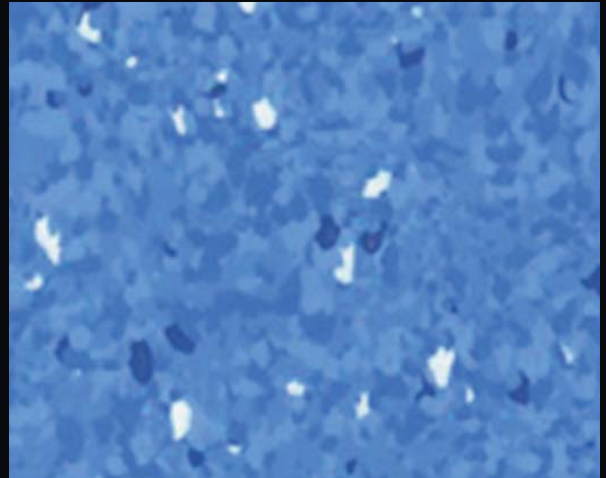

GAMBIER BLUE



WANNON GREEN

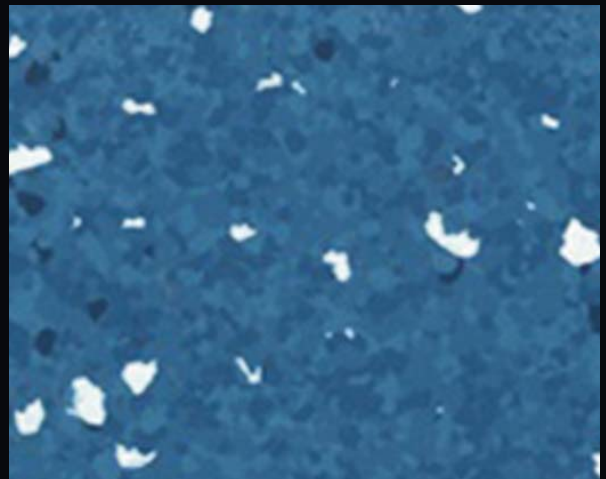

TORRES AZZURE

Variations may occur between photographic images, samples and batches in terms of colour, shade, pattern or similar. Dimensions are nominal.

AUSTRALIS™

COMMERCIAL FLOORING – HOMOGENEOUS VINYL SHEET



Australian made AUSTRALIS is a homogeneous sheet vinyl floor with a contemporary colour palette and bold tone on tone visual, which combines excellent durability and maintenance characteristics. Styled to blend light and shade in a multi chip visual, AUSTRALIS is especially suitable for facilities subject to high daily use.

PRACTICAL

- Broad range of soothing tone on tone neutrals and subtle accents to complement any interior.
- Low maintenance, protective polyurethane reduces initial and ongoing maintenance and increases scuff resistance.
- No need to apply polish.
- Flexible for ease of installation.

DURABLE



- Homogeneous construction for excellent dent and gouge resistance.
- Embossed surface texture and multi-colour chip visual assist maintenance and help hide soiling and wear patterns.

APPLICATIONS

General traffic areas of:

- Education
- Office
- Health care
- Light industrial
- Retail
- Hospitality


TECHNICAL DATA

Type of floor covering	EN ISO 10581	Homogeneous Sheet Vinyl
Manufactured		Australia
Product Identification	EN ISO 10581.4.1	Type I
Wear Resistance	EN660-2	Group T
Polyurethane Reinforced		Yes PUR
Roll Width	ISO 24341	1.83m
Roll Length	ISO 24341	16m
Overall Thickness	ISO 24346	2.0mm
Coverage		29.28m ²
Product Weight	ISO 23997	3.0Kg/m ²
Residual Indentation	ISO 24343-1	≤ 0.1mm (PASS)
Flexibility	ISO 24344, Method A	20mm mandrel, no cracking (PASS)
Castor Chair	ISO 4918	25 000 cycles (PASS)
Colour fastness	ISO 105-B02 (Method 3a)	≥ 6 (PASS)
TVOC Emissions	EN 13419-1	<50µg/m ² /hr (PASS) (GBCA limit < 500µg/m ² /hr)
Slip Resistance	AS4586:2013 (2004) Wet Pendulum Oil Wet *Third party tested, for detail refer to individual Test Reports	P3(X)* R10*
Fire Resistance	ISO 9239-1 (Floors) Critical Radiant Flux Smoke Development Rate AS/NZS 3837 (Walls) Cone Calorimeter Average specific extinction area	>7kW/m ² <750% Group 3 < 250m ² /kg
Classification (Use Area)	EN ISO 10874	Commercial: 34  Industrial: 43 

Visit www.armstrongflooring.com.au or contact Customer Service 1800 632 624 for technical data, installation, cleaning and maintenance instructions.

Please note: Recommendations are for guidance only, refer to relevant local, state, and federal construction codes and standards for requirements.

Contact:



Armstrong World Industries (Australia) Pty Ltd
29 – 39 Mills Road, Braeside, 3195 Victoria Australia

For further information and samples:
Australia Freecall 1800 632 624
Email customer_services@armstrong.com or contact us on the web

www.armstrongflooring.com.au