

# TIMBERLINE TRANSLATIONS

COMMERCIAL FLOORING  
HETEROGENEOUS VINYL SHEET

# TIMBERLINE

2.0mm x 1.83m x 25m



RUSTIC BEECH – COWABUNGA  
4X373490



ACADIAN OAK – WELL VERSED  
4X373740



OAK – BONA FIDE  
4X373600



RUSTIC BEECH – LIFE IS A  
4X373470



ACADIAN OAK – OILED PLANK  
4X373720



OAK – LIKE A ROCK  
4X373590



RUSTIC BEECH – HANG TEN  
4X373480



MAHOGANY – CACAO  
4X373700



OAK – TRIED & TRUE  
4X373550

Variations may occur between photographic images, samples and batches in terms of colour, shade, pattern or similar.

# TIMBERLINE

2.0mm x 1.83m x 25m



OAK – LEVEL HEADED  
4X373580



SURIT  
4X051100



CALDE  
4X031300



OAK – SOLID  
4X373570



LUCI  
4X031600



OBRA  
4X062200



OAK – TOO RIGHT  
4X041400



SOLU  
4X061100



BLANC  
4X032400



# TRANSLATIONS

2.0mm x 1.83m x 25m



ORIGAMI – SPELLBOUND  
4S380540



MAZE – MAKE BELIEVE  
4S380570




TWEED – SOOTHSAYER  
4V380510



ORIGAMI – BEWITCHED  
4S380530



MAZE – HOCUS POCUS  
4S380560

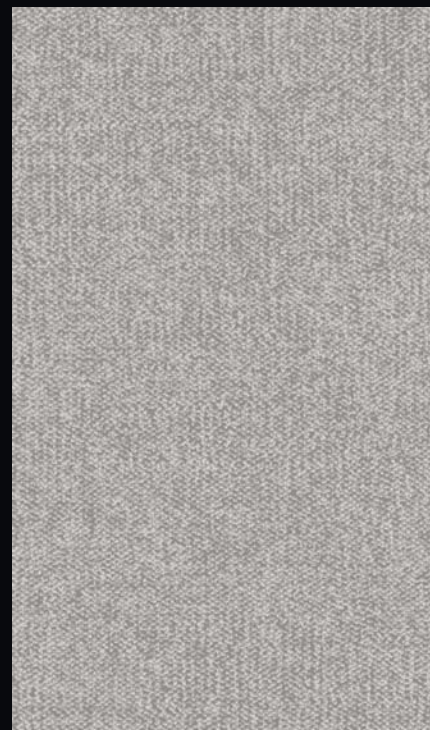

TWEED – SLIGHT OF HAND  
4V380500

Variations may occur between photographic images, samples and batches in terms of colour, shade, pattern or similar.





ACADIAN OAK – WELL VERSED



TRANSLATIONS – MAZE  
TRANSLATIONS – ORIGAMI  
TRANSLATIONS – TWEED




# TIMBERLINE

2.0mm x 1.83m x 25m




LINEARIS – RIGHT-ON  
4X373430

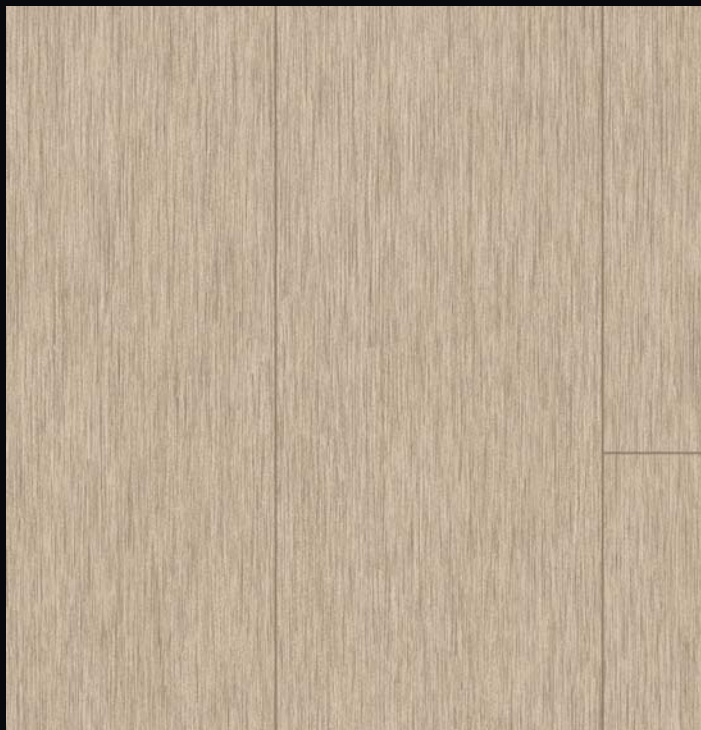

LINEARIS – ELEMENTARY  
4X373420

# TRANSLATIONS

2.0mm x 1.83m x 25m

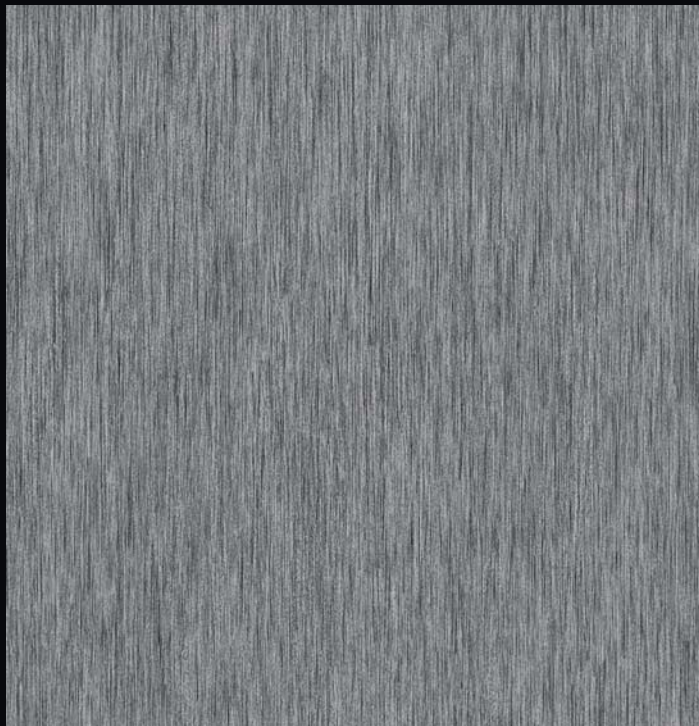

ALCHEMY – OBSIDIAN  
4S380640



ALCHEMY – GINGER  
4S380630

# TRANSLATIONS

2.0mm x 1.83m x 25m



LITHOS STONE – PHYLLITE  
4S343350




LITHOS STONE – STONE ANDESITE  
4S343300




LITHOS STONE – ANTHRACITE  
4S343370



SIDECAR – BAGEL  
4S343520

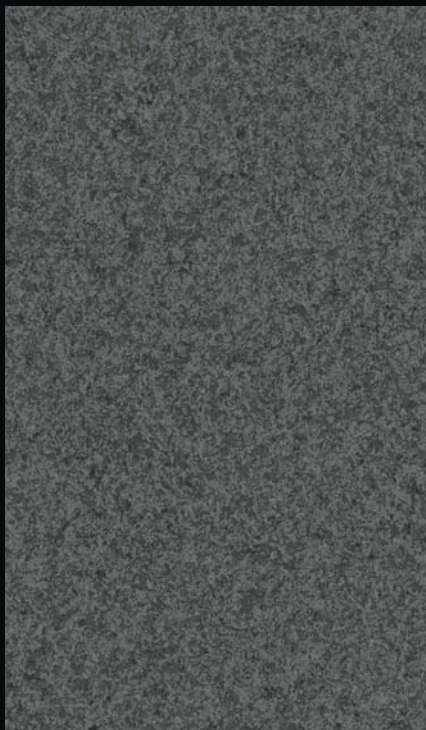

SIDECAR – METER MAID  
4S343510

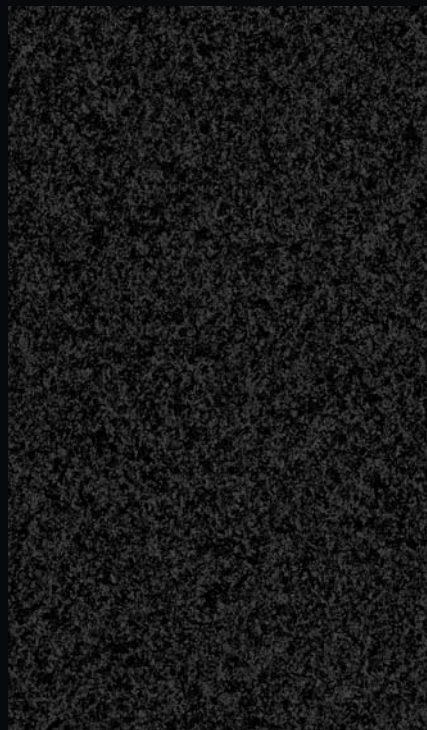

SIDECAR – LAST CALL  
4S343490

Variations may occur between photographic images, samples and batches in terms of colour, shade, pattern or similar.









TIMBERLINE – BLANC





# TIMBERLINE / TRANSLATIONS

## HETEROGENOUS VINYL SHEET




### TECHNICAL DATA

Type of floor covering		Heterogeneous Sheet Vinyl					
Manufacturing standard		EN 649 (EN/ISO 10582)					
Classification		EN 685		Commercial: 33		Industrial 42	
							
Surface treatment		PUR					
Wear resistance		EN 660-1		Group T			
Wear layer thickness		EN 429		0.55mm			
Total thickness		EN 428 (ISO 24346)		2.00mm			
Roll length		EN 426 (ISO 2431)		25m			
Roll width		EN 426 (ISO 2431)		1.83m			
Weight/m²		EN 430 (ISO 23997)		2.8 kg/m²			
m²/Roll		45.75m²					
Residual indentation		EN 433 (ISO 24343-1)		≤ 0.1mm (PASS)			
Effect of castor chair		EN 425 (ISO 4918)		PASS			
Colour fastness		ISO 105-B02 (method 3)		>6 (PASS)			
Impact sound isolation		ISO 140-8		4 dB			
Flexibility		EN 435 (Method A) (ISO 24344)		20mm mandrel, no cracking (PASS)			
Chemical resistance		Good resistance (full tests can be supplied on request)					
Dimensional stability		EN 434 (ISO 23999)		<0.40% (PASS)			
Curling after exposure to heat		EN 434 (ISO 23999)		<8 mm (PASS)			
Seam strength		EN 684 (ISO 16906)		PASS			
Electrical resistance		EN 1081		2 x 10 <sup>10</sup> ohm (not 'anti static')			
Static electrical propensity – Walking test		EN1815		>2kV (not 'anti static')			
Fire resistance		ISO 9239-1					
Critical radiant flux		≥8 kW/m²					
Smoke development rate		< 750% min					
Pattern	Tweed, Origami, *Maze	Lithos Stone, Sidecar	Rustic Beech	Acadian Oak, Linearis, Mahogany	Oak	Surit, Solu, Obra, Luci, Calde, Blanc	
Plank size (within pattern) – nominal	N/A	N/A	Random lengths between 795-329mm x 65mm	1269mm x 180mm	Oak 1264mm x 90mm	Surit 625 x 128.5, Obra 1250 x 90, Luci 625 x 100, Solu, Calde, Blanc 625 x 112.5	
Pattern repeat (mm)	900 x 1250 *(½ Dropped)	900 x 1250 (½ Dropped)	900 x 1250 (½ Dropped)	1800 x 1250	900 x 1250 (½ Dropped)	900 x 1250	
Slip resistance AS/NZS 4586							
Surface embossing	EC-1	EC-2	EC-3	EC-4/EC-6	EC-4	EC-5	
Appendix A: Wet pendulum	P2	P2	P2	P2	P2	P2	
Appendix D: Oil-wet	R10	R10	R10	R10	R10	R10	
Range	34 Patterns – 18 x wood, 3 x stone, 3 x overall, 6 x carpets, 4 x linear.						
Installation	Full Spread adhesive						
Seaming	Heat welded with matching weld rod, chemical seam seal (follow manufacturer's instructions)						
Recommended adhesive	Armstrong Flooring; Full spread SV-200, Coving & Accessories: SC-100 Contact Adhesive or PU100 Seambond at seams						
Applications	Interior commercial areas with high traffic and light industrial areas, e.g. Medical centres, nursing homes, offices, store rooms, production halls, department stores, schools, hospitals. Also suitable for residential applications.						
Manufactured	Korea						
Instructions	Armstrong Flooring Pty Ltd instructions regarding adhesives, installation, cleaning and maintenance should be observed. Please contact Armstrong Flooring for details; armstrongflooring.com.au or 1800 632 624						
<b>NOTE:</b> Surface Embossing – each different surface emboss/texture is tested separately for slip resistance characteristics, refer to third party certificates for details.							

**Please note:** Recommendations are for guidance only, refer to relevant local, state, and federal construction codes and standards for requirements. Variations may occur between photographic images, samples and batches in terms of colour, shade, pattern or similar.



Contact:



**Armstrong World Industries (Australia) Pty Ltd**  
29 – 39 Mills Road, Braeside, 3195 Victoria Australia

For further information and samples:  
Australia Freecall 1800 632 624  
Email [customer\\_services@armstrong.com](mailto:customer_services@armstrong.com) or contact us on the web

**[www.armstrongflooring.com.au](http://www.armstrongflooring.com.au)**