





Quick Ship Australian Stocked Range

NATURAL CREATIONS™ LUXURY VINYL PLANK AND TILE

Armstrong Flooring's NATURAL CREATIONS™ collection of Luxury Vinyl Plank (LVP) and Tile (LVT) captures the essence of earth's woods, stones, metals and original graphic designs in an array of plank sizes. Our commercial LVP/LVT combines the best of durability, technology, and design to give you the look and performance you expect.

NATURAL CREATIONS $^{\!\scriptscriptstyle{\text{\tiny M}}}$ creates flexible, cost effective and flawless design solutions for your environments.

 Bold and powerful designs, fused with premium length planks, Natural Creations™ gives you the freedom and advantage to create timeless interiors. Whether looking to create the impression of a larger room, drawing focus
to a feature or simply wanting the most advanced flooring, the NATURAL
CREATIONS™ range has been carefully selected to offer you the perfect
solution.

Armstrong Flooring's NATURAL CREATIONS™ products are third party certified for low VOC emissions. Select Natural Creations™ LVP/LVT and have the peace of mind you expect from Armstrong Flooring.





ArborArt™ 2.5mm LUXURY VINYL PLANK



FACTORY FLOOR FLAX SEED² – 3L110125



FACTORY FLOOR FLAX SEED¹ – 3L120725



WEATHERED OAK LIGHT² – 3L000026



WEATHERED OAK LIGHT¹ – 3L121025



BARNYARD GREY2 - 3L110225



BARNYARD GREY¹ – 3L120825



FACTORY FLOOR TOASTED SESAME² – 3L120425



BARNSIDE EMBERS² – 3L110325



RITE WOOD MISSION¹ – 3L131525



ROAN OAK DRIFTWOOD GREY¹ – 3L121225



BLACK FOREST TRANQUILLITY¹ – 3L120925



OAK AMERICAN¹ – 3L220525

¹ Available in 152mm x 1219mm planks

² Available in 229mm x 1219mm planks



ArborArt[™] 2.5mm LUXURY VINYL PLANK



PERUVIAN WALNUT — MAYAN GOLD¹ — 3L121125



AMENDOIM – NATURAL¹ – 3L121325



AMENDOIM – CHESTNUT¹ – 3L121425



OAK BLONDE1 - 3L170513



WESTERN OAK3 - 3L164513



RIVER GUM3 - 3L450806



GHOST GUM3 - 3L093606



IRON BARK³ – 3L093607



NORTHERN OAK3 - 3L168911



SOUTHERN OAK3 - 3L160402



SNOW GUM3 - 3L093601



PAPER BARK³ – 3L161111

¹ Available in 152mm x 1219mm planks

³ Available in 184mm x 1219mm planks



Mystix™ 2.5mm LUXURY VINYL PLANK



SILK SCARF PLATINUM² – 3L120625



SILK SCARF BLACK SILVER² – 3L120525



ARIA CHARCOAL¹ – 3L210125



CHROMA STONE TAUPE¹ – 3L131825

Mystix[™] 2.5mm LUXURY VINYL TILE



MOROCCO ANISE⁴ – 3L400078



MOROCCO LICORICE⁴ – 3L400077



MOROCCO CLOVE⁴ - 3L400079

EarthCuts[™] 2.5mm LUXURY VINYL TILE



GRANITE BLACK⁴ – 3L161708



SIERRA SOFT WHITE4 - 3L400539



RAW CRETE COOL STONE4 - 3L400548

¹ Available in 152mm x 1219mm planks ² Available in 229mm x 1219mm planks

⁴ Available in 457mm x 457mm tiles



NATURAL CREATIONS™ with the I-SET™ Installation System

4.0mm ArborArt™ and Mystix™ with the I-Set™ Installation System

Commercial flooring projects today call for quicker completion schedules and high quality performance products that meet any budget.

The NATURAL CREATIONS™ Luxury Vinyl Plank (LVP) collection is now available with the I-Set™ Installation System, a perfect solution for spaces that require quick installations.

The Armstrong Flooring I-SetTM installation system is a revolutionary, non-wet adhesive system which is factory applied to 4.0mm NATURAL CREATIONSTM Luxury Vinyl Plank. This type of installation system has been proven in commercial carpet tile for decades and is now available in resilient flooring from Armstrong Flooring. Look for NATURAL CREATIONSTM with I-SetTM.

- Factory applied no wet adhesive.
- Reduces installation time by almost half (compared to traditional methods).
- No adhesive fumes.
- The space can be occupied immediately.

Visuals, colours, and textures of the ArborArt™ and Mystix™ collections combined with this revolutionary technology provide great designs in an innovative, easy-to-install, durable product. All NATURAL CREATIONS™ collections are easy to maintain and repair. Armstrong Flooring NATURAL CREATIONS™ products are third party certified for low VOC emissions. Select NATURAL CREATIONS™ LVP and have the peace of mind you expect from Armstrong Flooring.

ArborArt™ I-Set™ Range



BARNSIDE EMBERS¹ – 3P115325



BARNYARD GREY¹ – 3P120825



AMENDOIM NATURAL¹ – 3P121325



PERUVIAN WALNUT MAYAN GOLD¹ – 3P121125

Mystix™ I-Set™ Range



SILK SCARF PLATINUM² – 3P120525




SILK SCARF BLACK SILVER² – 3P120625

¹ Available in 152mm x 1219mm planks

² Available in 229mm x 1219mm planks



NATURAL CREATIONS™ 4.0mm with the I-Set Installation System

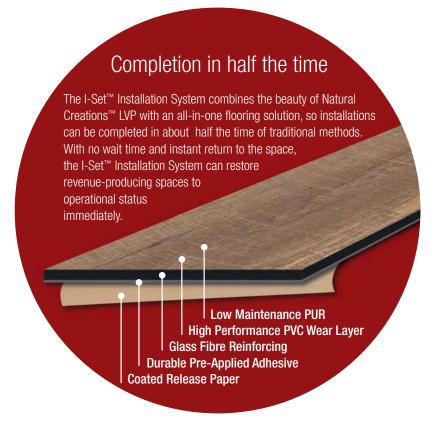



- Innovative
- S Secure
- E Easy-to-install T Technology

NATURAL CREATIONS™ 4.0mm ArborArt™ and Mystix™ with the I-Set™ Installation System

Fast and Easy Installation

Revolutionary All-in-One Flooring Solution



The innovative technology behind this new all-in-one solution maintains adhesion as well as traditional glue down methods. The I-Set™ Installation System resists popping and lifting when subjected to high foot traffic and rolling loads. Quick install products, such as loose lay and click, simply can't match the value of this new system.

NATURAL CREATIONS™ Luxury Vinyl Plank with the I-Set™ Installation System enables products to be installed without the use of additional adhesives (for further information refer to detailed installation instructions at www.armstrongflooring.com.au). The product is fabricated with a durable commercial adhesive during the manufacturing process and shipped with a coated release paper to keep individual flooring products from adhering to each other.

Easy installation saves time and money













Return the area to productive use immediately — no curing necessary. The strength of the adhesive bond will continue to increase with time and traffic.

Key points for I-Set[™] installation

- 1. Read and follow the warnings as to the suitability of the I-Set™ planks for the area you wish to cover.
- 2. Read and follow the installation instructions.
- 3. Acclimatise I-Set[™] tiles to room temperature.
- 4. Ensure floor preparation work is completed as per instructions and complies with the Australian standard 1884-2012.
- 5. Sweep and vacuum the subfloor in preparation for the installation.
- 6. On concrete floors use a damp mop to remove any remaining dust and allow the floor to completely dry.
- 7. Check tile temperature ensuring that the tiles are the same as the floor when installing to minimise any potential movement of the I-Set™ planks.
- 8. Keep the adhesive backing free from dust as you are installing the planks.
- 9. When installed ensure the I-Set™ floor is rolled with a 45kg three wheeled roller in both directions.



Special Order Range

Lead time is approximately 12-14 weeks from placement of order.

Mystix™ 2.5mm LUXURY VINYL PLANK AND TILE

Because the ideal colour or pattern is not always available 'off the shelf' Armstrong Flooring offers an extended range of NATURAL CREATIONS™ Luxury Vinyl Plank and Tile on a Special Order basis.

If you are unable to find just the right colour or pattern from our Stock or Special Order ranges, contact your Armstrong Flooring Representative and we will draw upon our global resources to source suitable alternatives.

Minimum quantities apply depending on pattern. Quantities range from 200-300m².

Lead Time is approximately 12-14 weeks from placement of order. Contact your Armstrong Flooring Representative or Customer Services 1800 632 624, customer_services@armstrongflooring.com for more information.



FLIGHT PATH CHARCOAL1/4



FLIGHT PATH NATURAL4



FLIGHT PATH WARM BROWN⁴



FLIGHT PATH GREY BEIGE1/4



SILK SCARF PLATINUM^{2/5}



SILK SCARF BLACK SILVER^{2/5}



SILK SCARF COPPER BLUSH⁵



KINDERLLOY SMOKED ALUMINUM⁶



KINDERLLOY BLACKENED LEAD⁶



KINDERLLOY BRONZE PATINA6



KINDERLLOY COPPER VERDIGRIS⁶

¹ Available in 152mm x 1219mm planks

² Available in 229mm x 1219mm planks

⁴ Available in 457mm x 457mm tiles ⁵ Available in 457mm x 914mm planks

⁶ Available in 305mm x 610mm planks



Mystix™ 2.5mm LUXURY VINYL TILE

SPECIAL ORDER RANGE

Lead time is approximately 12-14 weeks from placement of order.









STREAM GREY BEIGE4

STREAM CHARCOAL4

STREAM WARM BROWN4









JET NATURAL4

JET WARM BROWN⁴

JET GREY BEIGE⁴

JET CHARCOAL4









CHROMA STONE SPAR1/4

CHROMA STONE LUNA1/4

MOROCCO CARDAMON4

MOROCCO ZANTAR4









ARIA NATURAL⁴

ARIA WARM BROWN⁴

ARIA CHARCOAL4

ARIA GREY BEIGE1/4

¹ Available in 152mm x 1219mm planks

⁴ Available in 457mm x 457mm tiles



Mystix™ 2.5mm LUXURY VINYL PLANK

SPECIAL ORDER RANGE

Lead time is approximately 12-14 weeks from placement of order.



⁷ Available in 152mm x 914mm planks



EarthCuts™ 2.5mm LUXURY VINYL TILE

SPECIAL ORDER RANGE

Lead time is approximately 12-14 weeks from placement of order.



RAW CRETE BLACK KNIGHT⁴



RAW CRETE COOL STONE⁴



RAW CRETE HENNA STONE⁴



RAW CRETE IGNEOUS ROCK4



RAW CRETE PARADISO4



RAW CRETE WARM STONE⁴



METAL CRETE COOL STONE⁴



METAL CRETE WARM STONE⁴



METAL CRETE IGNEOUS ROCK4



METAL CRETE BLACK KNIGHT⁴



METAL CRETE HENNA STONE⁴



METAL CRETE PARADISO4



SIERRA TAUPE⁴



SIERRA CREAM⁴

⁴ Available in 457mm x 457mm tiles

NATURAL CREATIONS™ Quick Ship Australian Stocked Range

PRACTICAL

- Low maintenance polyurethane (PUR) reinforced to aid maintenance.
- Traditional 'glue down' installation for added security in high traffic areas.
- Contemporary wood and metal patterns styled to express the ultimate fashion statement.

DURABLE

 Heavy commercial rating and wear layer for durability in high use areas.

APPLICATIONS

- Retail, Hospitality
- Education
- · Health and aged care
- Residential

TE∩⊦	1V 1 I 1 V 1	ΠΔΤΔ

Type of floor covering	EN ISO 10582	Luxury Vinyl Tile an	d Plank					
Manufactured		China						
Size	ISO 24342	152 x 1219mm*	229 x 1219r	nm**				
m²/carton		3.34	3.34					
Kg/m ²	ISO 23997	4.29	4.29					
Overall Thickness	ISO 24346	2.5mm	2.5mm					
Wear Layer	ISO 24346	0.55mm	0.55mm					
Wear Layer Type	ISO 24340	Type I	Type I					
Wear Resistance	EN660-2	Group T	Group T					
Polyurethane Reinforced		Yes PUR	Yes PUR					
Dimensional Stability	ISO 23999	≤ 0.25% (PASS)						
Residual Indentation	ISO 24343-1	≤ 0.10mm (PASS)						
Castor Chair	ISO 4918	PASS						
Pattern		Amendoim*	Weathered Oak*	Barnside Embers**	Factory Floor Flax Seed*/**	Barnyard Grey*/**	Aria*	Chroma*
*Available in 2.5 x 152 x 1219mm planks **Available in 2.5 x 229 x 1219mm planks		Silk Scarf**	Peruvian Walnut*		Factory Floor Toasted Sesame**	Black Forest*	Flight Path*	
	·					Roan Oak*		
Slip Resistance	AS/NZS 4586							
Surface Embossing		EC-A	EC-C	EC-D	EC-E	EC-F	EC-H	EC-L
Wet Pendulum		P1(Z)	P3(X)	P3(X)	P3(X)	P2(Y)	P3(X)	P3(X)
Oil – Wet		R10	R10	R10	R11	R10	R10	R10
Fire Resistance	ISO 9239-1							
Critical Radiant Flux	>8kW/m2							
Smoke Development Rate	<750%							
				((°D 00)		

4.0mm NATURAL CREATIONS™ with the I-SET™ Installation System

Commercial: 33

PRACTICAL

Classification (Use Area)

• Low maintenance polyurethane (PUR) reinforced to aid maintenance.

EN ISO 10874

- I-Set[™] installation system for ease of installation and fast install (start trading sooner).
- Contemporary wood and metal patterns styled to express the ultimate fashion statement.

DURABLE

Industrial: 42

 Heavy commercial rating and wear layer for durability in high use areas

APPLICATIONS

- · Retail, Hospitality
- Education
- Health and aged care
- Residential

TECHNICAL DATA

Type of floor covering	EN ISO 10582	Luxury Vinyl Tile and	Plank			
Manufactured		China				
Size	ISO 24342	229 x 1219mm	152 x 1219mm	152 x 1219mm	152 x 1219mm	152 x 1219mm
m²/carton		2.23	2.23	2.23	2.23	2.23
Kg/m ²	ISO 23997	7.54	7.54	7.54	7.54	7.54
Overall Thickness	ISO 24346	4.0mm	4.0mm	4.0mm	4.0mm	4.0mm
Wear Layer	ISO 24346	0.55mm	0.55mm	0.55mm	0.55mm	0.55mm
Wear Layer Type	ISO 24340	Type I	Type I	Type I	Type I	Type I
Wear Resistance	EN660-2	Group T	Group T	Group T	Group T	Group T
Polyurethane Reinforced		Yes PUR	Yes PUR	Yes PUR	Yes PUR	Yes PUR
Dimensional Stability	ISO 23999	≤ 0.25% (PASS)				
Residual Indentation	ISO 24343-1	≤ 0.10mm (PASS)				
Castor Chair	ISO 4918	PASS				
Pattern		Silk Scarf	Amendoim	Peruvian Walnut	Barnside Embers	Barnyard Grey
Slip Resistance	AS 4586					
Surface Embossing		EC-A	EC-A	EC-C	EC-D	EC-F
Wet Pendulum		P1(Z)	P1(Z)	P3(X)	P3(X)	P2(Y)
Oil – Wet		R10	R10	R10	R10	R10
Fire Resistance	ISO 9239-1					
Critical Radiant Flux	>8kW/m2					
Smoke Development Rate	<750%					

Classification (Use Area)

EN ISO 10874

Commercial: 33



Industrial: 42



NATURAL CREATIONS™ 2.5mm Special Order Range

Lead time is approximately 12-14 weeks from placement of order

TECHNICAL	DVIV
ILUIINIUAL	DAIA

ILUIINIUAL DAIA					
Type of floor covering	EN ISO 10582	Luxury Vinyl Tile and F	Plank		
Manufactured		China			
Size	ISO 24342	305 x 610mm 457 x 914mm		457 x 457mm	152 x 914mm
m2/carton		3.34	3.34	3.34	3.34
Kg/m2		4.31	4.31	4.31	4.31
Overall Thickness	ISO 24346	2.5mm	2.5mm	2.5mm	2.5mm
Wear Layer	ISO 24346	0.55mm	0.55mm 0.55mm		0.55mm
Wear Layer Type	ISO 24340	Type I Type I		Type I	Type I
Wear Resistance	EN660-2	Group T	Group T Group T		Group T
Polyurethane Reinforced		Yes PUR	Yes PUR	Yes PUR	Yes PUR
Dimensional Stability	ISO 23999	≤ 0.25% (PASS)	≤ 0.25% (PASS)	≤ 0.25% (PASS)	≤ 0.25% (PASS)
Residual Indentation	ISO 24343-1	≤ 0.1mm (PASS)	≤ 0.1mm (PASS)	≤ 0.1mm (PASS)	≤ 0.1mm (PASS)
Castor Chair	ISO 4918	PASS	PASS	PASS	PASS
Fire Resistance	ISO 9239-1				
Critical Radiant Flux		>8kW/m²	>8kW/m²	>8kW/m²	>8kW/m²
Smoke Development Rate		<750%	<750%	<750%	<750%
Classification (Use Area)	EN ISO 10874	Commercial: 33	Indus	strial: 42	
Slip Resistance	AS 4586: 2014 (2013)				
Surface Embossing		EC-A	EC-H	EC-L	EC-N
Wet Pendulum		P1(Z)	P3(X)	P3(X)	P1(Z)
Oil – Wet		R10	R10	R10	R10
Pattern		Kinderlloy	Aria	Delicato	Morocco
		Silk Scarf	Flight Path	Metal Crete	
			Jet	Raw Crete	
			Sideline	Sierra	
			Stream	Chroma	

NOTE: Surface Embossing – each different surface emboss/texture is tested separately for slip resistance characteristics, refer to third party certificates for details.



Available from:						

Armstrong Flooring Pty Ltd

29 – 39 Mills Road, Braeside, 3195 Victoria Australia

For further information and samples:
Australia Freecall 1800 632 624
Email customer_services@armstrongflooring.com or contact us on the web