| PINK BATTS® INSULATION (WALLS AND CEILINGS) |                         |                      |                   |                |                      |                 |
|---|-------------------------|----------------------|-------------------|----------------|----------------------|-----------------|
| Material<br>R-value                         | Nominal<br>Thickness mm | Batt size<br>mm x mm | Batts<br>per pack | m²<br>per pack | Cover per<br>pack m² | Product<br>code |
| R1.5  | 65                      | 1160 x 430           | 24                | 12.0           | 13.6                 | 900166          |
| Wall  | 00                      | 1160 x 580           | 24                | 16.2           | 18.2                 | 900167          |
| R2.0  | 90                      | 1160 x 430           | 24                | 12.0           | 13.6                 | 901217          |
| Wall  | 90                      | 1160 x 580           | 24                | 16.2           | 18.2                 | 901218          |
| B0.0  |                         | 1160 x 430           | 12                | 6.0            | 6.8                  | 900210          |
| R2.0<br>HD Wall                             | 70                      | 1160 x 580           | 12                | 8.1            | 9.1                  | 900211          |
| I IID Wall                                  |                         | 1200 x 600           | 12                | 8.6            | 9.7                  | 900213          |
| D0.5  | 90                      | 1160 x 430           | 12                | 6.0            | 6.8                  | 900253          |
| R2.5<br>HD Wall††                           |                         | 1160 x 580           | 12                | 8.1            | 9.1                  | 900256          |
| I UD Maii I                                 |                         | 1200 x 600           | 12                | 8.6            | 9.7                  | 900214          |
| R2.5  | 130                     | 1160 x 430           | 16                | 8.0            | 9.0                  | 901254          |
| Ceiling                                     | 130                     | 1160 x 580           | 16                | 10.8           | 12.2                 | 901255          |
| R3.0  | 155                     | 1160 x 430           | 16                | 8.0            | 9.0                  | 901304          |
| Ceiling                                     |                         | 1160 x 580           | 16                | 10.8           | 12.2                 | 901305          |
| R3.5  | 175                     | 1160 x 430           | 16                | 8.0            | 9.0                  | 901354          |
| Ceiling                                     |                         | 1160 x 580           | 10                | 6.7            | 7.6                  | 901355          |
| R4.0  | 195                     | 1160 x 430           | 10                | 5.0            | 5.6                  | 901404          |
| Ceiling                                     |                         | 1160 x 580           | 10                | 6.7            | 7.6                  | 901403          |
| R5.0  | 215                     | 1160 x 430           | 8                 | 4.0            | 4.5                  | 901504          |
| Ceiling                                     |                         | 1160 x 580           | 8                 | 5.4            | 6.1                  | 901505          |
| R6.0  | 250                     | 1160 x 430           | 6                 | 3.0            | 3.4                  | 901604          |
| Ceiling                                     | 250                     | 1160 x 580           | 6                 | 4.0            | 4.5                  | 901605          |

†† R2.5 high density wall batts designed specifically to fit 90mm stud walls

| PINK® FLOOR BATTS INSULATION |                         |                      |                   |                |                                  |                 |
|------------------------------|-------------------------|----------------------|-------------------|----------------|----------------------------------|-----------------|
| Material<br>R-value          | Nominal<br>Thickness mm | Batt size<br>mm x mm | Batts<br>per pack | m²<br>per pack | Cover per<br>pack m <sup>2</sup> | Product<br>Code |
| R2.5                         | 90                      | 1160 x 430           | 12                | 6              | 6.8                              | 900260          |

| PINK® SONOBATTS® ACOUSTIC INSULATION |                         |                      |                   |                |                                  |                 |
|--------------------------------------|-------------------------|----------------------|-------------------|----------------|----------------------------------|-----------------|
| Material<br>R-Value                  | Nominal<br>thickness mm | Batt Size<br>mm x mm | Batts<br>per pack | m²<br>per pack | Cover per<br>pack m <sup>2</sup> | Product<br>Code |
|                                      | 50                      | 1160 x 430           | 24                | 12.0           | 13.8                             | 940243          |
| R1.3                                 |                         | 1160 x 580           | 24                | 16.1           | 18.3                             | 940257          |
|                                      |                         | 1200 x 600           | 24                | 17.3           | 19.6                             | 940260          |
| R1.7                                 | 70                      | 1160 x 430           | 16                | 8.0            | 9.2                              | 940244          |
|                                      |                         | 1160 x 580           | 16                | 10.8           | 12.2                             | 940258          |
|                                      |                         | 1200 x 600           | 16                | 11.5           | 13.0                             | 940261          |
| R2.1                                 | 90                      | 1160 x 430           | 12                | 6.0            | 6.9                              | 940245          |
|                                      |                         | 1160 x 580           | 12                | 8.1            | 9.2                              | 940259          |
|                                      |                         | 1200 x 600           | 12                | 8.6            | 9.8                              | 940262          |

| PINK® SONOBATTS® PREMIUM ACOUSTIC INSULATION |                         |                      |                   |                |                      |                 |
|--|-------------------------|----------------------|-------------------|----------------|----------------------|-----------------|
| Material<br>R-Value                          | Nominal<br>Thickness mm | Batt Size<br>mm x mm | Batts<br>per pack | m²<br>per pack | Cover per<br>pack m² | Product<br>Code |
|  | 50                      | 1160 x 430           | 12                | 6.0            | 6.9                  | 940166          |
| R1.5   |                         | 1160 x 580           | 12                | 8.1            | 9.2                  | 940165          |
|  |                         | 1200 x 600           | 12                | 8.6            | 9.8                  | 940164          |
|  | 70                      | 1160 x 430           | 10                | 5.0            | 5.8                  | 940170          |
| R2.1   |                         | 1160 x 580           | 10                | 6.7            | 7.6                  | 940171          |
|  |                         | 1200 x 600           | 10                | 7.2            | 8.1                  | 940192          |
| R2.7   | 90                      | 1160 x 430           | 8                 | 4.0            | 4.5                  | 940193          |
|  |                         | 1160 x 580           | 8                 | 5.4            | 6.1                  | 940194          |
|  |                         | 1200 x 600           | 8                 | 5.8            | 6.6                  | 941403          |
| R3.0   | 100                     | 1160 x 430           | 6                 | 3.0            | 3.4                  | 941104          |
|  |                         | 1160 x 580           | 6                 | 4.0            | 4.7                  | 940283          |
|  |                         | 1200 x 600           | 6                 | 4.3            | 4.9                  | 941106          |

| PINK® ACOUSTI-THERM® INSULATION |                         |                      |                   |                |                                  |                 |  |
|---------------------------------|-------------------------|----------------------|-------------------|----------------|----------------------------------|-----------------|--|
| Material<br>R-value             | Nominal<br>Thickness mm | Batt size<br>mm x mm | Batts<br>per pack | m²<br>per pack | Cover per<br>pack m <sup>2</sup> | Product<br>code |  |
| R1.5                            | 65                      | 1200 x 430           | 12                | 6.2            | 6.8                              | 902160          |  |
|                                 |                         | 1200 x 580           | 12                | 8.4            | 9.3                              | 902161          |  |
| R2.0                            | 75                      | 1200 x 430           | 12                | 6.2            | 6.8                              | 902162          |  |
|                                 |                         | 1200 x 580           | 12                | 8.4            | 9.3                              | 902163          |  |
| R2.5                            | 90                      | 1200 x 430           | 12                | 6.2            | 6.8                              | 902164          |  |
|                                 |                         | 1200 x 580           | 12                | 8.4            | 9.3                              | 902165          |  |

## Pink Batts® from Fletcher Insulation® have been trusted by Australians since 1956.









#### NEED HELP?

For further information contact Fletcher Insulation on:

1300 654 444

info@insulation.com.au www.insulation.com.au

Additional assistance on Total R-values can also be found in the ICANZ Insulation Handbook at www.icanz.org.au

Fletcher Insulation

Fletcher Insulation 600 Woodstock Ave P 02 9677 4444 F 02 9832 3043


Rooty Hill NSW 2766 E info@insulation.com.au

The colour PINK, Pink® and Pink Batts® are registered trademarks of Owens Corning used under licence by Fletcher Insulation.

© Fletcher Insulation 2013 Pty Limited. Fletcher Insulation reserves the right to change product specifications without prior notification. Information in this publication and otherwise supplied to users as to the subject product is based on our general experience and is given in good faith, but because of the many particular factors whicher aroutside our knowledge and control and affect the use of products, no warranty is given or is to be implied with respect to either such information or the product fiself, in particular the suitability of the product for any particular purpose. The purchaser should independently determine the suitability of the product for the intended application. FBS-1 Glasswool Bio-Soluble Insulation® a registered trademark of ICANZ. Unless otherwise stated all other ™ and ® are trademarks or registered trademarks of the Pty Intelled ARN 72 001 175 355.

BR16 Revision 1 Issue Date 27.06.2013 / FI 0223 000113

The future of Insulation

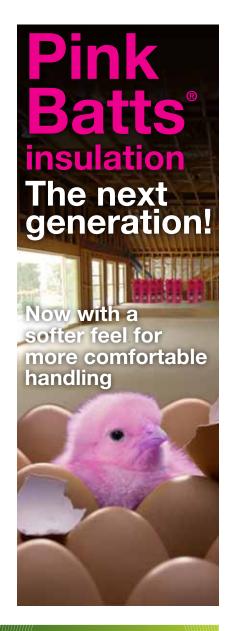




We safely deliver extraordinary value to our customers

### Fletcher Insulation® announces the next generation of Australia's most trusted insulation

Pink Batts® from Fletcher Insulation® have been trusted by Australians since 1956. Pink Batts® insulation reduces heat transfer by up to 60% resulting in great savings on your energy bills, not to mention how comfortable you'll be. In fact Pink Batts® insulation can reduce summer heat in your home by up to 12°C.





position and install.



#### **Next Generation Pink Batts®**

We've further refined the proprietary technology that makes Pink Batts® the market leader to create next generation Pink Batts®.

Pink Batts® insulation now has a softer feel for more comfortable handling. This makes them even easier unpack, handle, cut, position and install.

# NEXT GENERATION FORMULA Now with a softer feel for more comfortable handling

#### Pink® Batts from Fletcher Insulation®

- ✓ Pink your guarantee of quality
- √ Keep you cool in summer and warm in winter
- √ Reduce energy consumption saving you money
- ✓ Save more energy in use than the energy used in manufacture
- ✓ From Fletcher Insulation® The only Australian glasswool manufacturer with GECA (Good Environmental Choice Australia) certification
- ✓ CodeMark certified
- ✓ Low allergen
- √ FBS-1 Glasswool Bio-Soluble Insulation®
- ✓ Non combustible
- Supplied in light, compact packs to minimize Occupational Health & Safety issues during installation
- Australian made
- ✓ Trusted by Australians for over 50 years
- √ Backed by a lifetime warranty
- ✓ Now with a softer feel for more comfortable handling.

Fletcher Insulation® has added this next generation technology to Pink Batts®, Pink® Floor Batts, Pink® SonoBatts®, Pink® SonoBatts® Premium and Pink® Acousti-Therm® insulation. All of these products now benefit from a new softer feel for more comfortable handling.

#### Pink® Floor Batts insulation

High density underfloor insulation system that is easy to install in new build, renovation and retrofit applications. This versatile high density insulation solution provides outstanding thermal performance, reduces heat transfer between suspended floors and reduces heating energy usage.

#### Pink® SonoBatts® acoustic insulation

Delivers excellent acoustic performance for domestic applications. Ideal for insulation in metal and timber stud wall systems and as infill between floors and ceilings.

#### Pink® SonoBatts® Premium acoustic insulation

The premium cavity infill batt for room-to-room noise control. Installed in ceilings, between floor and internal stud walls. These products minimise airborne sound transmission using standard construction methods and timber sizes. Perfect for rooms where extra noise protection is required, such as nurseries and bathroom walls.

#### Pink® Acousti-Therm® insulation

High density glasswool insulation batts with excellent acoustic properties suited to residential wall applications. May also be used to achieve a high R-value in a small wall cavity.



Insist on Pink Batts® from Fletcher Insulation®

Now with a softer feel for more comfortable handling