

## **DESIGN DEPARTMENT - PRODUCT SPECIFICATION SHEET**

DECIONINIANE	Callulan	

DESIGN NAME Cellular

DESIGNER: Woven Image

ORIGIN: Australia

COLOURS: 27


WEAVE: Non woven

COMPOSITION: 100% PET (60% recycled)

DIMENSIONS: 1158mm x 2380mm (+/- 2mm)

WEIGHT: 3.8 kg per panel

THICKNESS: 12mm +/- 7% (Echo Panel)

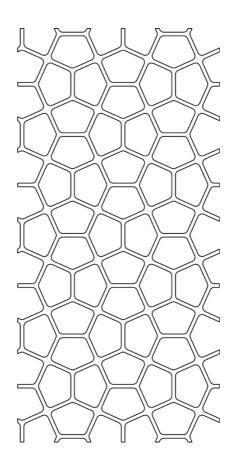

**DATE: 31.1.19** 



PERFORMANCE COLOUR FASTNESS TO LIGHT:	ISO 105-B02-1994 Rating: 6-7
FIRE TEST:	EchoPanel® 12mm achieves: AS 1530.3 ISO 9705: Group 1 GB8624 B1 BS EN 13501.1: Classification B-s1, d0
FABRIC CARE:	See additional care guide. Blot excess spills from material quickly. Wipe with a damp cloth. Warning, avoid excessive amounts of water.
SOUND ABSORPTION:	EchoPanel® 12mm achieves: AS ISO 354 – 2006 NRC Value: 0.35 (with no air gap)
VOC EMMISSIONS:	ASTM D5116 Rate: < 0.02 mg/m²/hr (7 days)
ENVIRONMENTAL:	EchoPanel® achieves GreenTag Certification GreenRate: Level A
INSTALLATION:	Prior to installation, ensure the surface area to which the tiles are going to be fixed is smooth, clean and free from dust or any other contaminants that may impede the installation
USE:	



## **DESIGN DEPARTMENT - PRODUCT SPECIFICATION SHEET**

**DATE: 31.1.19** 

DESIGN NAME Penta

DESIGNER: Woven Image

ORIGIN: Australia

COLOURS: 27

QUANTITY: 10 tiles per box


COMPOSITION: 100% PET (60% recycled)

DIMENSIONS: 185mm (+/- 1mm) x 245mm (+/- 1mm)

25mm corner radius

WEIGHT: 2.28 kg/box of 10

THICKNESS: 12mm +/- 7%

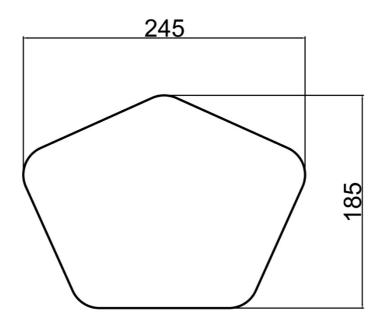

COLOUR FASTNESS TO LIGHT:	ISO 105-B02-1994 Rating: 6-7
FIRE TEST:	EchoPanel® 12mm achieves: AS 1530.3 ISO 9705: Group 1 GB8624 B1 BS EN 13501.1: Classification B-s1, d0
FABRIC CARE:	See additional care guide. Blot excess spills from material quickly. Wipe with a damp cloth. Warning, avoid excessive amounts of water.
SOUND ABSORPTION:	EchoPanel® 12mm achieves: AS ISO 354 – 2006 NRC Value: 0.35 (with no air gap)
VOC EMISSIONS:	ASTM D5116 Rate: < 0.02 mg/m²/hr (7 days)
ENVIRONMENTAL:	EchoPanel® achieves GreenTag Certification GreenRate: Level A
INSTALLATION:	Prior to installation, ensure the surface area to which the tiles are going to be fixed is smooth, clean and free from dust or any other contaminants that may impede the installation
USE:	

**PERFORMANCE**