

Altair® Louvre Windows with the

STRONGHOLD® SYSTEM




breezway®

Stronghold[®] System

Altair[®] Louvre Windows with the Stronghold[®] System

are now the logical inclusion when extra strength and safety is required in commercial or residential buildings.

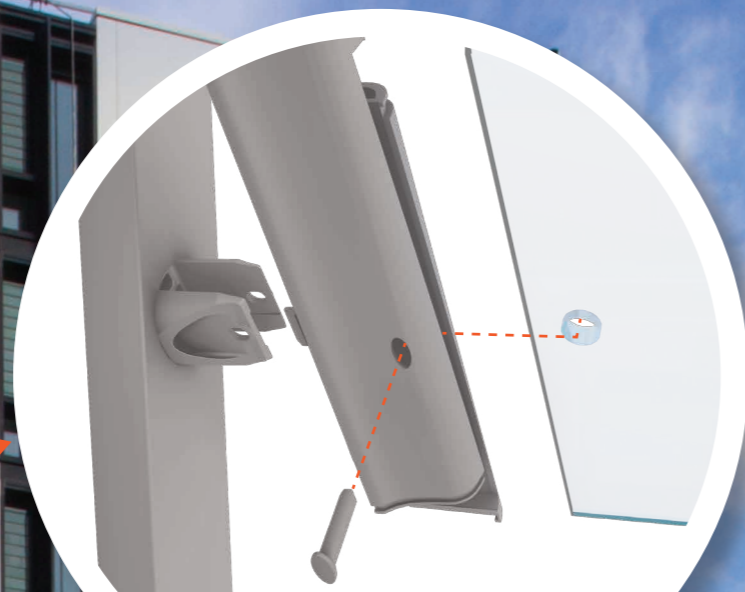

The pin secures the blade to the bearing and clip from inside.

Strong and Secure

Altair Louvre Windows with the Stronghold System have been designed to achieve higher blade retention and provide greater design flexibility in buildings.

Ideal for use more than 2 metres above ground level, Altair Louvres with the Stronghold System gain the benefits of full ventilation whilst providing added safety to the entire window opening.

In multi-story applications, a balcony enclosure or wintergarden can be created to provide extra year round living space. Occupants can enjoy the winter sun in a protected spot or take advantage of fresh breezes.

Testing and Loads

Altair Louvres with the Stronghold System have been tested to AS2047 "Windows in Buildings", and to ICR.005 "Protection of openable windows" to ensure superior performance.

Please Note: The Stronghold System is a window, not a balustrading system.

Altair Louvres with the Stronghold System have passed extensive testing to prove its ability to safely retain blades within the clips even when subjected to heavy loads.

With the louvre open, a pneumatic ram is used to apply loads of up to 163kgs to the edge of the toughened Stronghold glass blade without breakage.

In the closed position, the face of a toughened Stronghold glass blade can sustain loads of up to 75kgs without breakage.

Product Offer

- Available within the Breezway Easyscreen[™], Innoscreen[®] or SL2[®] Window Systems complete with 6mm thick, 152mm or 102mm toughened glass or aluminium blades.
- Altair Component System available with aluminium or toughened glass blades for installation into other framing systems.
- Heat soaked glass blades also available for code compliance.
- Widest choice of customising options.
- Suitable for all handle types or as an Altair Powerlouvre[™] Window System.
- Restricted openings available to satisfy Fall Prevention requirements.
- Enables bay widths of up to 1200mm.


Load test in opened position



Load test in closed position



Load applied to louvre blade in open position

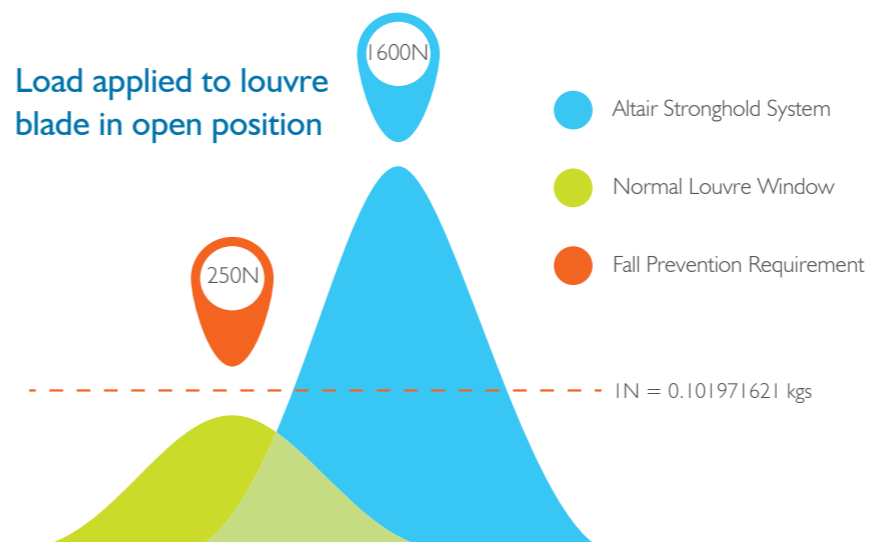

breezway[®]



Visit www.breezway.com.au for more information.

Breezway Head Office

35 Cambridge Street

Coorparoo QLD 4151

ABN 24 081 897 823

Telephone: +61 7 3847 0500

1800 777 758 (from within Australia)

Facsimile: +61 7 3397 8643

Email: designassist@breezway.com.au



Your Breezway Louvre
Window Fabricator:



Copyright and trademarks (Altair®, Stronghold®, Powerlouvre™, Innoscreen® Easyscreen™, SL2®) are owned by the Breezway Group of Companies August 2016.