



INSTALL RHEEM®



SAFETY LOCK REQUIRES TWO-FINGER OPERATION FOR BOILING WATER



READY AND FILTER LIGHTS ADVISE WHEN WATER IS BOILED OR WHEN FILTER REQUIRES REPLACING



QUALITY CHROME PLATED CAST METAL BODY FOR STYLE AND DURABILITY



DRIP-FREE DESIGN FOR CLEANER WORK AREAS



RUBBER TIPPED ACTIVATION LEVERS FEATURE MOMENTARY AND LOCK-ON POSITIONS TO ASSIST WITH FILLING INDIVIDUAL CUPS OR LARGE JUGS

Energy efficient

Users can set the 7 day programmable timer to suit their schedules and save energy when drinks are not required. Timer programming is simple and intuitive. Additionally a sleep mode automatically powers the unit down when it's not in use.



Filter out the taste of chlorine

The Rheem on-tap series is fitted with a filter that removes chlorine, taste and odours for a perfect drink of water or cup of tea. Fine dirt and sediment particles are removed while an advanced phosphate compound reduces costly lime-scale build-up.

The filter is a standard feature of the Rheem on-tap series. The replaceable filter cartridge can be easily removed by a simple twist and pull of the bayonet fitting.

Perfectly chilled

Optional Rheem chillers are available for both the 3 litre and 6 litre models providing up to 175 glasses of chilled water per hour. Flexible, modular design ensures maximum use of under cupboard space. Optional Rheem chillers automatically mirror the timer and auto-shut off programming of the TB.





While under the counter the focus is all about performance and flexibility, above the counter the focus is style, safety and ease of use. The water dispenser for the Rheem on-tap series was designed in close consultation with architects and interior designers to look and feel beautiful, and be safe and simple to use.

INSTALL A RHEEM®








"Breakthrough technology delivers filtered & boiling water from one system & reduces installation costs"

Filtered boiling and drinking water, on-tap



When you need filtered boiling water for tea or coffee and filtered drinking water for a refreshing drink, the Rheem TB on-tap is the ideal fit for any small to medium sized office. The under counter TB cabinet is compact in size, requires only a cold water connection and a standard power point.

All water is filtered and, if desired, chilled water can be provided with the addition of the modular Rheem chiller unit.

- 3 AND 5 LITRE TB MODELS, DELIVER UP TO
 170 CUPS OF BOILING WATER PER HOUR
- FILTER PROVIDES CLEANER DRINKING WATER AND IS EASY TO CHANGE
- BUILT-IN SAFE TRAY ELIMINATES NEED FOR SEPARATE TRAY AND DRAINAGE, ADDING PEACE OF MIND AND REDUCING INSTALLATION COSTS
- 7 DAY PROGRAMMABLE TIMER AND SLEEP MODE SAVES ENERGY AND MEETS BCA REQUIREMENTS
- OPTIONAL CHILLER UNIT IS MODULAR
 IN DESIGN TO MAXIMISE UNDER
 COUNTER SPACE



Accessories on-tap Sink-free Kit

Want to locate the dispenser in the boardroom or break-out room? The Rheem sink-free kit eliminates the need for a sink, allowing bench top mounting. A perfect complement to the tap design, the Rheem sink-free kit includes a drainage grate and tap extension to clear tall jugs and bottles.

Discreet Ventilation Kit

Ventilation is essential when installing a chiller*. The only tell tale sign of the Rheem discreet ventilation kit is the stainless steel grill, low down on the kick plate. Instead of unsightly grills in cupboard doors, the Rheem fan, air intake and stainless steel exhaust grill are


all housed discreetly at kick plate level. The fan draws power from the TB unit and saves energy by running only when required.


*Rheem Discreet Ventilation Kit is a mandatory requirement with the 6L chiller.







Rheem on-tap series installation and specification requirements







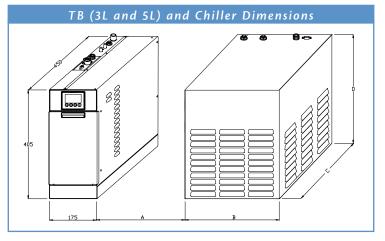

Chiller Dimensions				
Dimension	3 Litre	6 Litre		
A Clearance	50mm MIN	150mm MIN		
B Width	280	300		
C Depth	410	450		
D Height	320	405		

			ТВ		Chiller	
		Filtered Boiling & Drinking Water		Filtered Chilled Water		
Specifications	Model	TB3	TB5	CH3	CH6	
Specification Code		740003	740005	290250	290251	
Capacity	Litres (L)	3	5	3	6	
Initial Delivery	Litres (L)	4	5	3	6	
	Cups ¹	24	31	15	30	
One Hour	L/hr	24	28	25	34	
	Cups ¹ per hr	145	170	125	175	
Approx Weight Empty	kg	12	12	13	16	
Approx Weight Full	kg	18	18	16	22	
Minimum Water Supply Pressure	kPa	200	200	-	-	
Maximum Water Supply Pressure	kPa	1000	1000	-	-	
Input	kW	1.5	1.8	0.28	0.38	
Electrical Connection		Supplied with 10 Amp 3 Pin Plug and Flex		Powered by TB		
Plumbing Connections	Cold Water	½" BSPF	1/2" BSPF	1/4" John Guest		
Dimensions						
Width	mm	175	175	280	300	
Depth	mm	450	450	410	450	
Height	mm	405	405	320	405	

Quality System	TM V
Qu Endo Com	
Lic. QEC	0 9001 14766 Global



WARRANTY #Warranty: 1 year parts and labour

	Rheem on-tap series Combination Models		
Specification Code		Description	
	TB3CH3	3L Boiling and 3L Chilled combination 145/125 cups, includes vent kit 317255	
	TB3CH6	3L Boiling and 6L Chilled combination 145/175 cups, includes vent kit 317255	
	TB5CH3	5L Boiling and 3L Chilled combination 170/125 cups, includes vent kit 317255	
	TRECHE	51 Roiling and 61 Chillad combination 170/175 cupe includes year kit 217255	

Accessories	Part Number	Part Number			
5 Micron Filter Kit	317327	Supplied	Supplied		
Sink-free Kit	317453	Optional	Optional		
Discreet Ventilation Kit	317255	-	_	Optional	Required

Rheem Australia

www.rheem.com.au Sales 132 552 **Service 131 031**

1 Cup size 170ml, glass size for chilled water 200ml. Materials and specifications are subject to change without notice due to ongoing product improvements. *Rheem is a registered Trade Mark of Rheem Australia Pty Ltd.

