


HAWA Purolino 80 Sliding Door Fitting

For Door Weights up to 80 kg





For 1- and 2-leaf sliding doors Area of application:

Suitable for toughened glass and

laminated glass

• Glass thickness: Sliding door: Toughened glass: 8, 10

and 12 mm

Laminated glass: 8 - 13 mm,

Fixed glass panels: Toughened glass / laminated glass: 10 - 12 mm (with silicon up

to 13 mm)

• Max. door weight: 80 kg per door


• Max. door width: 700 mm

• Installation: Glass retention technology and wedge

suspension integrated in running track Increased sound insulation and draught proofing provided by vertical sealing profiles


and retractable door seal


Cut-out dimensions




Note

The cut-out dimensions must be observed. Laminated glass with max. 2 mm offset permitted.









Floor mounted door stop


Wall mounting with angled clip-on cover profile




Ceiling installation with angled clip-on cover profile





Integrated in ceiling with clip-on cover profile




Wall connection











HAWA Purolino 80 Fitting Set

	Cat. No.
For 1-leaf sliding doors, without running track and without floor guide	940.83.000



Note

Order 2 sets for 2 leaf sliding doors. Please order glass fixings for sliding doors separately (see accessories)

Set Components

		For 1 door	Cat. No.
1500	Left running gear With plastic coated ball bearing rollers	1 piece	940.83.012
666	Right running gear With plastic coated ball bearing rollers	1 piece	940.83.013
0 0	Suspension wedge for glass fixing, left	1 piece	940.83.022
	Suspension wedge for glass fixing, right	1 piece	940.83.023
	Track buffer with adjustable retaining spring, left	1 piece	940.83.040
	Track buffer with adjustable retaining spring, right	1 piece	940.83.041

Running and guide tracks

For Wall Mounting

		Material	Finish	Length mm	Cat. No.
	Running track set, wall mounted consisting of:	Aluminium	Silver coloured anodised	2000	940.83.320
	Running tracks, pre-drilled for wall mounting				940.83.620
·	Angled cover profile for ceiling installation and wall mounting				940.83.820
	Running track set, wall mounted consisting of:		Stainless steel coloured		940.83.321
	Running tracks, pre-drilled for wall mounting				940.83.621
	Angled cover profile for ceiling installation and wall mounting				940.83.821
	Running track set, wall mounted consisting of:	Aluminium	Silver coloured anodised	3000	940.83.330
	Running tracks, pre-drilled for wall mounting				940.83.630
	Angled cover profile for ceiling installation and wall mounting		Stainless steel coloured		940.83.830
	Running track set, wall mounted consisting of:				940.83.331
	Running tracks, pre drilled for wall mounting				940.83.631
	Angled cover profile for ceiling installation and wall mounting				940.83.831

Dimensions in mm Dimensional data not binding. We reserve the right to atter specifications without notice.

HAFELE



Running and guide tracks

For Wall Mounting

П	

		Material	Finish	Length mm	Cat. No.
	Running track set, wall mounted consisting of:	Aluminium	Silver coloured anodised	6000	940.83.360
	Running tracks, pre-drilled for wall mounting				940.83.660
•	Angled cover profile for ceiling installation and wall mounting				940.83.860
	Running track set, wall mounted consisting of:		Stainless steel coloured		940.83.361
	Running tracks, pre-drilled for wall mounting				940.83.661
	Angled cover profile for ceiling installation and wall mounting				940.83.861
	Running tracks, pre-drilled for wall mounting	Aluminium	Silver coloured anodised	Manufactured to size	940.83.699
			Stainless steel coloured anodised		940.83.698
	Angled cover profile for ceiling installation and wall mounting	Aluminium	Silver coloured anodised	Manufactured to size	940.83.899
			Stainless steel coloured anodised		940.83.898

Running and guide tracks For Ceiling Installation


		Material	Finish	Length mm	Cat. No.
	Running track set, ceiling mounted consisting of:	Aluminium	Silver coloured anodised	2000	940.83.420
	Running tracks, pre-drilled for ceiling installation				940.83.720
*	Angled cover profile for ceiling installation and wall mounting				940.83.820
	Running track set, wall mounted consisting of:		Stainless steel coloured anodised		940.83.421
	Running tracks, pre-drilled for ceiling installation				940.83.721
	Angled cover profile for ceiling installation and wall mounting				940.83.821
	Running track set, ceiling mounted consisting of:	Aluminium	Silver coloured anodised	3000	940.83.430
	Running tracks, pre-drilled for ceiling installation				940.83.730
	Angled cover profile for ceiling installation and wall mounting				940.83.830
	Running track set, wall mounted consisting of:		Stainless steel coloured anodised		940.83.431
	Running tracks, pre-drilled for ceiling installation				940.83.731
	Angled cover profile for ceiling installation and wall mounting				940.83.831


HXFEL

For Glass Doors

Running and guide tracks

For Ceiling Installation

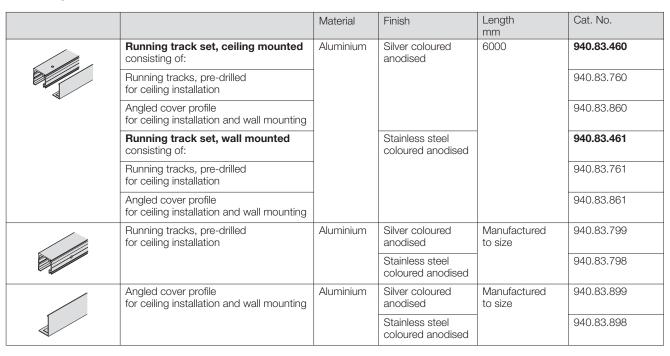



For Integrated Ceiling Installation

		Material	Finish	Length	Cat. No.
	Running track set, integrated ceiling installation consisting of:	Aluminium	Silver coloured anodised	2000	940.83.520
	Running tracks, pre-drilled for ceiling installation				940.83.720
	Angled cover profile for integrated ceiling installation				940.83.920
	Running track set, integrated ceiling installation consisting of:		Stainless steel coloured anodised		940.83.521
	Running tracks, pre-drilled for ceiling installation				940.83.721
	Angled cover profile for integrated ceiling installation				940.83.921
	Running track set, integrated ceiling installation consisting of:	Aluminium	Silver coloured anodised	3000	940.83.530
	Running tracks, pre-drilled for ceiling installation				940.83.730
	Angled cover profile for integrated ceiling installation				940.83.930
	Running track set, integrated ceiling installation consisting of:		Stainless steel coloured anodised		940.83.531
	Running tracks, pre-drilled for ceiling installation				940.83.731
	Angled cover profile for integrated ceiling installation				940.83.931

Motorial Finish

Longth

Cat No

Dimensions in mm Dimensional data not binding. We reserve the right to alter specifications without notice.





Running and guide tracks

For Integrated Ceiling Installation



	Material	Finish	Length mm	Cat. No.
Running track set, integrated ceiling installation consisting of:	Aluminium	Silver coloured anodised	6000	940.83.560
Running tracks, pre-drilled for ceiling installation				940.83.760
Angled cover profile for integrated ceiling installation				940.83.960
Running track set, integrated ceiling installation consisting of:		Stainless steel coloured anodised		940.83.561
Running tracks, pre-drilled for ceiling installation				940.83.761
Angled cover profile for integrated ceiling installation				940.83.961
Running tracks, pre-drilled for ceiling installation	Aluminium	Silver coloured anodised	Manufactured to size	940.83.799
		Stainless steel coloured anodised		940.83.798
Angled cover profile for integrated ceiling installation	Aluminium	Silver coloured anodised	Manufactured to size	940.83.999
		Stainless steel coloured anodised		940.83.998

HAFELE

HAWA Purolino	80 Accessories		
		Material	Finish





		Material	Finish	For glass thickness mm	Length	Cat. No.
0000	Glass fixing parts for one sliding door, toughened glass	-	-	8 10 (2)	-	940.83.024 940.83.025 940.83.026
90.00	Glass fixing parts for one sliding door, laminated glass, with disposable drilling jig	-	-	12 (3) 8 10	-	940.83.027 940.83.028
	2-piece floor guide, adjustable, free of play	Aluminium	Chrome plated matt	12 (3) 8 - 13	-	940.83.029 941.18.032
			Stainless steel coloured anodised			941.18.033
	Floor mounted door stop 57 x 28 x 39 mm (L x W x H)	Aluminium	Chrome plated matt	-	-	940.40.052
710			Stainless steel coloured anodised			940.40.053
1	End caps with threaded pin 1 piece, 65 x 60 mm (W x H)	Metal	Chrome plated matt	-	-	940.83.020
			Stainless steel coloured anodised			940.83.021
	End profile set, wall-fixed	Aluminium	Stainless steel coloured anodised	-	2500	940.83.125
			Silver coloured anodised Stainless steel coloured anodised	-	3500	940.83.135 940.83.136
	Rubber seal for end profile set	Plastic	-	-	2500	940.83.127
					3500	940.83.137
	Wall profile set, wall-fixed, with support profile	Aluminium	Stainless steel coloured anodised anodised	-	2500	940.83.225
* 4			Silver coloured anodised Stainless steel coloured anodised	-	3500	940.83.235 940.83.236
	Wall profile 35 x 21 mm (W x H)	Aluminium	Silver coloured anodised Stainless steel coloured	-	2500	941.24.925 941.24.825
			anodised Silver coloured anodised		3500	941.24.935
			Stainless steel coloured anodised		0000	941.24.835
	Rubber buffer for wall profile set and wall profile, 28 x 21 mm (W x H)	Plastic	-	-	2500	941.24.081
-	prome, 20 x 2 mm (vv x m)				3500	941.24.082
	Centering unit for wall profile	Plastic	Black	-	-	941.24.043
	Centering unit for wall mounting	Plastic	Grey	-	-	941.24.042
-	Planning and installation instructions	-	-	-	-	732.29.097

Retractable door seals	▶ Page 6.11
Pull handles	Page 1.50 - 1.63
Knob handles	Page 10.60 - 10.63
Toplock sliding door lock	▶ Page 7.106 - 7.109

Dimensions in mm Dimensional data not binding. We reserve the right to after specifications without notice.