#LATICRETE® SYSTEM

LATICRETE Product Selection Catalogue 2009

Laticrete System Materials

High strength and weather resistant ceramic tile and stone installation materials

- Tile Adhesive
- Waterproofing Membranes
- Grouts
- Renders
- Epoxy Grouts
- Screeds
- Additives
- Cleaners
- Sealers



Sydney Aquatic Swimming Pool



National Library Canberra



Glebe Pt Rd & Parramatta Rd Sydney



LATICRETE TILE & STONE INSTALLATION MATERIALS

Sales & Technical Advice

VIC: 0407 817 236

NSW: 0418 761 428

QLD: 0418 393 642

Head Office
29 Telford Street
VIRGINIA. QLD. 4014. Australia.
P.O. Box 508
VIRGINIA B. C. QLD. 4014. Australia.
Phone: 07 38651599
Fax: 07 3

VIRGINIA B. C. QLD. 4014. Australia. Phone: 07 38651599 Fax: 07 38652250 Toll Free Phone: 1800 331 012 Toll Free Fax: 1800 808 549

LATICRETE SYSTEM MATERAILS

Tile Adhesives

Waterproofing Membranes

Grouts

Renders

Epoxy Grout

Screeds

Additives

Cleaners

Sealers

Covering a Complete Range of Building Requirements

Industrial

Commercial

Domestic

Facades

Swimming Pools



MANUFACTURER PROFILE

LATICRETE is the world leader in high strength, shock and weather resistant installation systems for ceramic tile, pavers, brick and stone.

For over 50 years, LATICRETE has provided the technology and products to make innovative, permanent installations for ceramic tile and related finishes.

LATICRETE materials are engineered to perform as a system. Fully compatible products for surface preparation, waterproofing, adhesives and grouting ensuresingle source responsibility.

WARRANTY

All LATICRETE materials are guaranteed not to deteriorate or breakdown when used as per instructions printed in LATICRETE literature.

The LATICRETE system is guaranteed not to deteriorate or breakdown for 10 years when used as a total system. This warranty covers Materials and Labour.

TECHNICAL SUPPORT

LATICRETE offers technical support for all tile and stone installations. LATICRETE prepares custom specifications with the correct choice of materials to suit your project.

Call our Toll Free Technical Support HOTLINE 1800 331 012

Index to Laticrete Products

Description	Product	Page	
CEMENT BASED	280 Standard Cement Based Adhesive	4	
ADHESIVES	317 Super Cement Base Adhesive290 Super Floor' n Wall Premium Cement Based Adhesive	4 4	
MULTI PURPOSE	Ultra X8 Polymer & Fiber Enhanced Adhesive		
ADHESIVES	Multi Purpose 253 Flexible Adhesive		
ADRESIVES	Premium Cementitious 335 Flexible AdhesiveLatafix 248 Multi Purpose Adhesive		
	Lataflex Gold (Flexible) Multi Purpose Adhesive	6	
	Lataflex Silver Multi Purpose Adhesive	6	
	Multiflex Multi Purpose Flexible Adhesive	6	
ONE COMPONENT	Multi-Mastic #9 Ceramic Tile Adhesive ·····	7	
ONE-COMPONENT	LataMastic #15 Ceramic Tile Adhesive	7	
ADHESIVES,	Anti-Fracture Adhesive (Flexible 2 Part Rubber)	7	
2 PART ANTIFRACTURE	Laticrete Wet Fix Polymer Fortified Cement	7	
MORTAR GROUT &	101 Rapid Set Latex Admix	8	
ADHESIVE LATEX	Super Flexible 333 Mortar Additive		
	Laticrete 1776 Flexible Grout Fortifier (with Bio Barrier)Latabond Latex Admix	8	
THE & CTONE	4237 Latex Mortar Admix	9	
TILE & STONE	4237 RAPID Latex Mortar Admix	9	
INSTALLATION MATERIALS	Laticrete 73 Tile Setting Liquid	9	
	226 Thick Bed Mortar Mix	10	
	3701 Grout & Mortar Admix		
	86 LatiLevel Self Leveling Underlayment	10	
EPOXY ADHESIVE & GROUTS	SpectraLock Pro Grout 1200 Series		
	LATAPOXY 2000 High Performance Epoxy Grout		
	LATAPOXY 300 Epoxy Adhesive Installation System		
	LATAPOXY 310 Spot Bonding Adhesive	13	
GROUTING MATERIALS	Floor Grout, 500 Series, Sanded Grout for Joints Over 3mm		
SEALERS & CLEANERS	Laticrete #190 Sealer	16	
WATERPROOF			
MEMBRANES	Laticrete 9235 Liquid Applied Waterproof Membrane Laticrete 9237 Liquid Applied Rubber Waterproof Membrane Laticrete 9240 Liquid Applied Rubber Waterproof Membrane Laticrete Hydro Ban Liquid Applied Waterproof Membrane	17 17	
SOUND CONTROL PRODUCTS	AttenuMat-720 Sound Control MatSound Control Matt # 150 Sound Control Membrane		
	Sound Control Underlayment #18	18	

Cement Based Adhesives

Information

Pricing (excl GST)

280 Standard Thin-set



A sanded, thin-set adhesive for installing quarry tiles, pavers, brick and stone. For Interior & exterior use over masonry, concrete surfaces and mortar beds. For improved performance fortify with LATICRETE Latabond.

Coverage:

6 to 8m2 per bag with 6x6mm notch trowel

Packaging:

20kg bag 56 bags per pallet

Colour:

Grey

317 Super Cement Based Adhesive



An economical Super cement based adhesive for installing ceramic tile, quarry tile & natural stone. Mix with water for internal & external applications on masonry substrates. When mixed with Latabond, the adhesive is suitable for tile over tiles, plasterboard, cement sheet and suitable waterproof membranes. For swimming pool use, mix with 3701Grout & Mortar Admix. When mixed with 101 Rapid Latex, meets and exceeds the requirement of a C2TFS1 Classification

Coverage:

6.5 / 7.5 m² per bag with 6x6mm notch trowel

Packaging:

20 kg bags 56 bags per pallet

Colour:

Off White

White (special order)

290 Super Floor 'n Wall Premium Cement



290 is a premium grade Super Cement Based Adhesive for installing ceramic tile, quarry tile & natural stone. Mix with water for internal & external applications on masonry substrates. When mixed with Latabond, the adhesive is suitable for plasterboard, cement sheet and suitable waterproof membrane. For hard to bond substrates like vinyl & Formica, mix with 333 Super Flexible Mortar Additive. For swimming pool use, mix with 3701 Mortar Admix. Meets and exceeds the requirements of a C1TE Classification.

Coverage:

6.5 / 7.5 m² per bag with 6x6mm notch trowel

Packaging:

20 kg bags 56 bags per pallet

Colour:

Grey

Off White

White



Multi-purpose Adhesives

Information

Pricing (excl GST)

Ultra X8 Polymer & Fiber Enhanced



Ultra X8 - The unique fiber reinforcing adds workability, flexibility and reduces shrinkage of the adhesive. This adhesive is up to 40% higher performing than normal cement based adhesives. X8 is suitable for use on cement sheet, suitable waterproof membranes, renders, screeds and masonry surfaces, both internally and externally. Also suitable for plasterboard in internal areas. X8 can be fortified with Laticrete Latex Additives for a wide range of installations. Meets and exceeds the requirements for a C1TE Classification

Coverage:

7 to 8 m² per bag with 6x6mm notch trowel

Packaging:

20 kg bags 56 bags per pallet

Colour:

Off White

White

253 Multipurpose Flexible Tile Adhesive



Is a Flexible polymer fortified multipurpose adhesive for installing porcelain, ceramic, quarry, stone and glass tile over cement sheet, Gyprock, suitable waterproof membranes and masonry surfaces to internally and external installations. High performance when mixed with water. Meets and exceeds the requirements for a C2TE Classification.

Coverage:

7-8m2 per bag with 6x6mm notch trowel

Packaging:

20 kg bags 56 bags per pallet

Colour:

Off White

White

335 Premium Flexible Tile Adhesive



Is a Flexible Premium Cementitious Adhesive is a high performance bagged cementitious powder to be mixed with water to install low absorption ceramic tile, porcelain tile and natural stone using the thin-set method of installation. Exceeds the requirements of AS4992.1&2 classification C2TES1. Excellent for exterior and underwater applications, superior bond to masonry. The ultimate thin-set for porcelain and class tile.

Coverage:

9-10m2 per bag with 6x6mm notch trowel

Packaging:

20 kg bags

56 bags per pallet

Colour:

Off White

White

Latafix 248 Multi Purpose Adhesive



Flexible Multipurpose
Adhesive for installing tile & stone
to concrete, brick, renders,
screeds, plaster board, concrete
block, cement sheet & suitable
waterproof membranes. Suitable
for white marble and glass tiles.
Internal use.

Coverage:

11.5 to 12.5 m² per bag with 6x6mm notch trowel

Packaging:

20 kg bags

56 bags per pallet

Colour:

White



Lataflex Gold (Flexible) Rubber & Polymer



Lataflex Gold is a flexible adhesive that provides excellent coverage when mixed with water. Lataflex has good open time and bucket life as well as setting fast to enable grouting in a shorter time than conventional adhesives. Lataflex will bond to all common substrates as well as tile over tile, suitable for internal and external use. Meets and exceeds the requirements for a C1TES1 Classification

Coverage:

12 to 14 m² per bag with 6x6mm notch trowel

9 to 11 m² per bag with 10 x 10 notch trowel

Packaging:

20 kg bags 56 bags per pallet

Colour:

Light Grey

Lataflex Silver Rubber & Polymer



Lataflex Silver provides an excellent coverage when mixed with water. Lataflex Silver has good open time and bucket life. Lataflex Silver will bond to plaster board, cement sheet and most common building substrates as well as suitable waterproof membranes. Suitable for internal and external use. . Meets and exceeds the requirements for a C1TES1 Classification

Coverage:

11 to 13 m² per bag with 6x6mm notch trowel

8.5 to 10.5 m² per bag with 10 x 10 notch trowel

Packaging:

20 kg bags 56 bags per pallet

Colour:

Light Grey

Multiflex Multi Purpose Flexible Adhesive



An economical flexible rubber based multipurpose for installing ceramic tile, quarry tile and stone. Ideal for installing tile and stone over cement sheet, suitable waterproof membranes, plasterboard, tile over tile and masonry in internal installations. External installations over suitable waterproof membranes and masonry substrates. Meets and exceeds the requirements for a C1TES1 Classification

Coverage:

8 to 10 m² per bag with 10x10mm notch trowel

Packaging:

20 kg bags 56 bags per pallet

Colour:

Light Grey



One-Component Premixed Adhesives

LataMastic #9 Ceramic Tile Adhesive



economical white one pot adhesive for installing ceramic tile in dry areas. It has a long open time and suitable for use on plasterboard, cement sheet, render and concrete. Meets and exceeds the requirement of a D1TE Classification as per

LataMastic #9 is a versatile

AS4992.1 & 2

Information

Approx Coverage:

1 litre per m² with a 6x6mm notch trowel

Packaging:

15 litres 48 per Pallet

Pricing (excl GST)

MultiMastic #15 Ceramic Tile Adhesive



MultiMastic is a white one pot adhesive designed for interior installations of ceramic tile on both wall and floors. Recommended for use over plasterboard, cement sheet, render and concrete. MultiMastic is a special no slump formula that allows the tiler to hang a tile without the

need for spacers. Meets and exceeds the requirements of a D1TE Classification .

Approx Coverage:

1litre per m² with a 6x6mm notch trowel

Packaging:

1litres 12 per Carton

4 litres 3 per Carton

15 litres 32 per Pallet

2 Part Anti-Fracture Adhesive

Anti-Fracture Adhesive (2 Part Rubber)



AFA is a flexible 2 part rubber adhesive for installing tile and stone to a wide variety of substrates. Recommended for internal use only over concrete, screeds, renders, plasterboard, cement sheet, suitably prepared sheet wood flooring, suitable Waterproof membranes and

masonry. Meets and exceeds the requirements of a C2TES2 Classification

Information

Approx Coverage:

20 m² per unit 10x10 notch trowel from a 20 litre unit.

Packaging:

20 litre unit consisting of 1 pail and 2 x 20kg bags

10 litre unit consisting of 1 pail and 1 x 20kg bag

20 Litre Anti Fracture Liquid 10 Litre Anti Fracture Liquid Anti Fracture Powder

Information

Pricing (excl GST)

Pricing (excl GST)

Wet Fix Cement

Laticrete Wet Fix Polymer Fortified Cement



Wetfix is a specially designed polymer fortified cement for use in wet fixing ceramic tile and stone. Wet Fix is used in place of normal Portland cement for dry dusting semi dry screed beds prior to the wet laying of tile and stone. Wet Fix can also be mixed with clean water for making a high performance slurry bond coat

for bonding mortar beds to clean concrete and suitable waterproof membranes. Not suitable for green marble or water sensitive tile or stone, for these applications use Latapoxy 300 or consult Laticrete

Coverage:

10 to 14 m² per 20 kg bag

Packaging:

20 kg bags 56 per pallet

Colour:

Off white

White (special order)



Mortar, Grout & Adhesive Latex

Information

Pricing (excl GST)

101 Rapid Set Latex Admix



101 Rapid Set Latex Admix will mix with any cement based powder to increase performance and shorten the setting time. 101 can be used as an admix to renders, screeds, cement based adhesives and grout. For use in patching concrete and toppings. When mixed with Laticrete #317 or Laticrete 290 Floor 'n Wall adhesive, tiles can be grouted in 3 hours and ready for traffic 4 hours at 23°C room temperature.

Coverage:

1 x 20 litre pail with 4x20 kg bags of cement based Adhesive will cover approx 21-25m² with 6x6 notch trowel

Packaging:

1 litre bottle 12 per Carton

5 litre jugs 3 per Carton

20 litre pail 48 per Pallet

333 Super Flexible Additive



333 Latex liquid additive can be used instead of water to mix with all cement based adhesives to provide super high performance for bonding to hard to bond substrates, such as terrazzo, existing ceramic tile concrete and block work in external areas, vinyl tile, exterior grade ply wood, plasterboard, linoleum, plastic laminates and cut back adhesives in interior areas only.

Coverage:

1x20 litre pail mixes with 4x20kg bags of cement based Adhesive and will cover approx 21-25m² with 6x6 notch trowel

Packaging:

5 litre jugs 3 per Carton

20 litre pail 48 per Pallet

1776 Flexible Grout Fortifier (With Bio Barrier)



1776 is a specially designed for easy to use and easy to clean liquid latex additive for use with all cement based grouts. 1776 is economical and will provide long lasting performance for wall and floor grout.

grout.
"NOW WITH BIO BARRIER"

Packaging:

1 litre bottles 12 per Carton

5 litre jugs 3 per Carton

20 litre pail 48 per Pallet

Latabond Latex Admix



Latabond is a multi purpose latex admix for use in all cement based powders. Latabond is mixed on the job site to make screeds, renders and stucco mixes. Use Latabond in place of water to fortify cement based adhesives & tile grouts. Latabond adds bond strength, compressive strength, reduces water absorption and increases shock resistance to all mortars.

Packaging:

1 litre bottles 12 per carton

5 litre jugs 3 per carton

20 litre pails 48 per pallet



Tile & Stone Installation Materials

Information

Pricing (excl GST)

4237 Latex Mortar Admix



4237 is the original latex additive for tile and stone adhesives. 4237 will mix with Laticrete 211 Crete Filler powder to make a high strength, chemical, shock and vibration resistant adhesive. Suitable for swimming pools, facades, commercial and industrial tile and stone installations. Mix 4237 with 500 Series Laticrete floor grout to make a coloured adhesive for installing glass mosaics.

Coverage:

19 litre pail will mix with 4 bags of 211 powder and cover 25 to 30 m² with a 6x6mm notch trowel

Packaging:

36 per Pallet 7 litre pails 80 per Pallet

19 litre pails

1 litre jugs 12 per Carton

4237 RAPID Latex Mortar Admix



For a fast setting tile & stone adhesive. 4237 R will mix with Laticrete 211 Crete Filler powder to make a high strength, chemical, shock & vibration resistant adhesive. Suitable for commercial & industrial tile and stone installations. 4237 Rapid is ready for foot traffic in 3 hours at room temperature.

Coverage:

19 litre pail will mix with 3.5 bags 211 powder and cover 25 to 30m2 with a 6x6mm notch trowel

Packaging:

19 litre pails 36 per Pallet

211 Crete Filler Powder



A factory blend of high-strength Portland cement and graded sand for use with Laticrete 4237 Latex Mortar Admix & Laticrete 73 Tile Setting Liquid. For use with Laticrete 3701 as a slurry bond coat. Provides high performance, tight quality control & jobsite convenience.

Packaging:

20 kg bags 56 bags per pallet

Colour:

Grey

White

Laticrete 73 Tile Setting Liquid



73 is a contractor grade latex additive for use with Laticrete 211 Crete Filler Powder or 1:1 Portland cement and sand mixtures to make a tile fixing adhesive. 73 can be mixed with sanded colour grouts to make a coloured adhesive for installing glass tiles. 73 adds flexibility and increases bond strength to all cement based adhesives. For use over plasterboard, cement sheet and masonry substrates. 73 can be mixed with Portland cement for use as a bonding agent, suitable for commercial tile & stone installations.

Coverage:

19 litre pail will mix with 3.5 bags 211 powder and cover 25 to 30m² with a 6x6mm notch trowel

Packaging:

19 litre pails 36 per Pallet



Tile & Stone Installation Materials

226 Thick Bed Mortar Mix



226 is a factory blend of highstrength Portland cement and graded sands for use with 3701 Mortar Admix for medium & thick bed applications. Provides high performance & tight quality control. Can also be fortified with Laticrete 101, 333 & Latabond latex admixes. Mix 2 litres of latex admix with 1 x 20 kg bag of 226 for semi dry screeds and 2.6 litres of latex admix with 1 x 20 kg bag for 226 for renders.

Information

Packaging:

20 kg bags 56 bags per pallet

Colour:

Packaging: 1 litre Bottles

5 litre Jugs

20 litre Pails

12 per Carton

3 per Carton

48 per Pallet

Grev

Pricing (excl GST)

3701 Grout & Mortar Admix



3701 Latex admix is designed for use with Laticrete #226 Mortar Mix or Portland cement and sand mixes. 3701 is a multi use latex that will fortify any cement based adhesive or cement based tile grout, 3701 can be mixed with Laticrete 211 Crete Filler powder or neat cement for use as a slurry bond coat. Use 3701 in place of water for screeds & renders. 3701 increases the physical performance of Portland cement mortars.

For a semi dry screeds mix 2 litres of 3701 to 1 x 20 kg bag of Laticrete 226 Mortar Mix. For a render mix 2.6 litres of 3701 to a 1 x 20 kg bag of 226 Mortar Mix. For a slurry bond coat mix 20 litres of 3701 to 2 x 20 kg bags of Laticrete 211 Crete Filler powder. For use to fortify cement based adhesives mix approximately 6 litres of 3701 with a 20 kg bag of cement based adhesive.

Pricing (excl GST)

86 LatiLevel Self Leveling Underlayment

Self Leveling Underlayment

LATICRETE 86 LatiLevel is a cementitious powder that is mixed with water to produce a free-flowing self-leveling underlayment mortar for rapid leveling of interior and exterior sub-floors. Can be poured from feather edge to 20mm in one pour. LATICRETE 86 LatiLevel will produce a smooth and flat surface with excellent durability, which is ready for foot traffic in less than 4 hours at 21°C. The primer will increase bond and strength to substrates.



Information

Coverage:

Will cover approximately 4m2 at 3mm thick.

Packaging:

20 kg bags 56 bags per pallet

Colour:

Grey

Primer:

20 litre pail 48 per Pallet

5 litre jug 3 per Carton



Epoxy Adhesives & Grouts





Available in 40 colors

Information

Packaging:

1/4 Unit carton of pails consist of:

- 4 x 0.2kgsPart A,
- 4 x 0.15kgs Part B.
- 1 x 4kg Part C Powder

1 Unit consist of:

- 1 x 0.818kg Part A,
- 1 x 0.268kg Part B,
- 1 x 4kg Part C Powder.

#4 Unit consist of:

- 4 x 0.818kg Part A,
- 4 x 0.268kg Part B,
- 4 x 4kg Part C powder

Dazzle Carton consist of:

4 canisters which is sufficient for a #1 Unit.



Epoxy Adhesives & Grouts

Information

Pricing (excl GST)

SP100 Vertical Grade Stainless Epoxy Grout



SP100 is a 100% solids non sag easy to use epoxy grout. SP100 is a 3 component mix, Part A, Part B and Part C Filler Powder. Mix a 4 kg bag of Part C Filler Powder with a #1 Liquid. SP100 is suited to

Packaging:

#1 Unit Liquids only

#4 Units Liquids only

Latapoxy Part C Powder

Its non sag properties will not slump and run down vertical joints. SP100 is easy to install and cleans off with cold water. SP100 is suited to bathrooms, shopping malls foyers in domestic ,commercial areas & swimming pools. (For commercial kitchens, meat rooms and bottling plants use Latapoxy 2000 Industrial performance epoxy grout).

Colour:

As per current colour chart

Latapoxy 2000 High Performance Epoxy Grout



Latapoxy 2000 is a 3 part 100% solids epoxy specially formulated for maximum chemical resistance and high temperature resistance. Unaffected by most acids, corrosives and solvents. Recommended for industrial and commercial food processing applications such as

dairies, breweries, meat packing plants CIP rooms and commercial and industrial kitchens. Latapoxy 2000 is a nonpigmented, easy to install and easy to clean formula. Latapoxy 2000 is fast curing, ready for traffic in 10 to 12 hours. Meets and exceeds the requirements of an R2 Classification.

Packaging

#1 Unit liquids only

#4 Unit liquids only

Latapoxy Part C Powder

Colour:

As per current colour chart

Latapoxy 300: Epoxy Adhesive Installation



Latapoxy 300 is a high strength 100% solids epoxy adhesive for chemical resistant installations of industrial & commercial tiles in bottling plants and food processing areas. Latapoxy 300 is suitable for bonding to a wide variety of hard to bond to substrates. Latapoxy 300 will not stain white or light coloured marbles and agglomerates Particularly suited for installing green marble and water sensitive stone and agglomerate stone. Also for installing rubber and wood flooring. Each unit contains resin, hardener & filler powder. Meets and exceeds the requirements of an R2 Classification

Coverage:

Approximately 4m² with 6x6 notch trowel

Packaging:

13 kg unit


Colour:

White



SET IT AND FORGET IT!

LATAPOXY 310 a revolutionary new method of large format tile and stone installation.

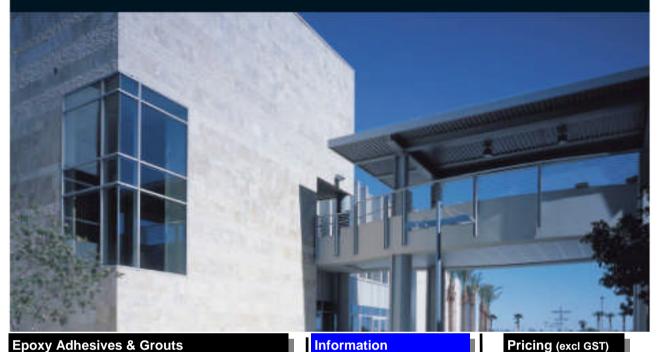

Epoxy Adhesives & Grouts

Latapoxy 310 Spot Bonding Cartridge

Triple your productivity of vertical stone and tile installations and dramatically reduce labor costs with the exclusive dual component LATAPOXY 310 Cordless Mixer. Quickly and easily dispenses LATA-POXY 310 Stone Adhesive onto tile, porcelain and stone veneers. Many more square metres can be installed per day with less effort and greater success with this system. Patented design and gear system allow speed and dosing control for accurate applications every time. No mixing, just insert the dual component cartridge, screw on mixing nozzle and pull the trigger!

<u>Information</u>

Packaging:

A+B Cartridge Normal Set Carton of 15

A+B Cartridge Rapid Set Carton of 15

Cartridge Nozzles Box of 12

310 Cordless Mixer Kit Includes charger and battery.



Latapoxy 310 Spot Bonding Bulk



A 2-component, high strength construction epoxy adhesive for spot bonding large format tile and stone on vertical surfaces, for interior or approved exterior applications. Offers major advantages in terms of speed and productivity over mechanical anchoring, plaster and wire, and the thin-set method of veneer installation. LATAPOXY® 310 Stone Adhesive allows for quick, easy plumb adjustment while stone is in place to compensate for uneven walls and stone thickness variations. LATAPOXY 310 Stone Adhesive is permanent; it will not fail or deteriorate over

Packaging:

1 Litre unit (Carton of 8) A+B Normal Set A+B Rapid Set

10 Litre unit (Each) A+B Normal Set A+B Rapid Set

20 Litre unit (Each) A+B Normal Set A+B Rapid Set

PL100

Product Selection Catalogue



Floor Grout, 500 series, Sanded Grout For joints over 3 mm



A specially formulated blend of high strength Portland cement, graded aggregates, polymer fortifiers and colour fast pigments. Designed to provide a dense and durable grout joint. Economical, permanent and easy to use. For maximum performance fortify with Laticrete 1776 Grout Admix Plus or Laticrete 3701.

(Floor grout can be used in large joints on walls)

Wall Grout, 600 series, Unsanded Grout for Joints under 3 mm



A careful blend of high strength Portland cement, polymer fortifiers and fillers. For grouting narrow joints up to 4mm. Suitable for marble, granite and ceramic tiles. For maximum performance fortify with Laticrete 1776 Grout Admix Plus or Laticrete Flexible Grout Fortifier.

(Wall grout can be used in small joints on floors).

Information


Pricing (excl GST)

		FLOOR		WALL	
COLOUR	CODE	10kg	8x2kg	10kg	8x2kg
Silk	03				
Marble Beige	17				
Sauterne	18				
Midnight Black	22				
Antique White	23				
Natural Grey	24				
Hemp	27				
Sand Beige	30				
Sandstone	34				
Mocha	35				
Platinum	42				
Bright White	44				
Raven	45				
Sterling Silver	78				
Almond	85				
Silver Shadow	88				
Smoke Grey	89				
Light Pewter	90				



PL100

Recent Projects

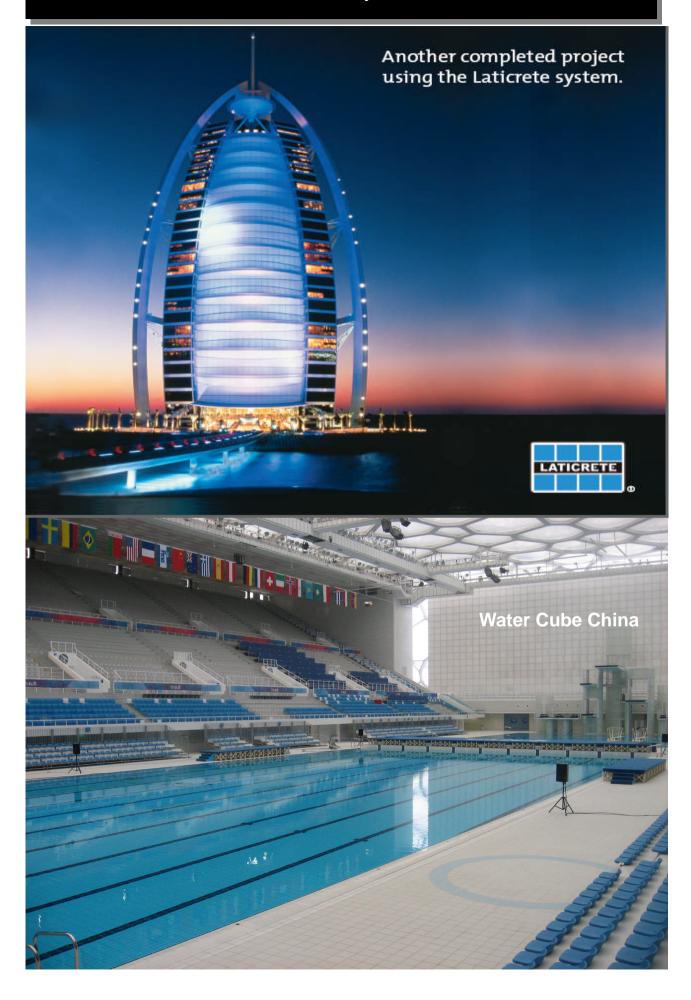

Sealers & Cleaners

Information

Pricing (excl GST)

Laticrete 190 Sealer



190 is a clear penetrating sealer for porous masonry, marble, limestone, sandstone, terracotta, cement grout joints and masonry surfaces. 190 is easy to apply and will provide a deep permanent seal for your projects. Suitable for internal and external use.

Packaging:

500ml bottles 18 per Carton

1 litre jugs 12 per Carton

5 litre jugs 3 per Carton

20 litre pail 48 per Pallet

TC 50



Is an acidic based cleaner with powerful detergents for the initial cleaning of ceramic tiles. TC 50 will remove grout haze, dirt and building debris from old and new tiles. Please read instructions before application.

Packaging:

500ml bottles 18 per Carton

1 litre jugs 12 per Carton

5 litre jugs 3 per Carton

20 litre pail 48 per Pallet

Epistrip



Epistrip is a simple and effective chemical for the removal of excess epoxy from tiles, flooring or other Surfaces.

Packaging:

1 litre bottle 12 per Carton

5 litre Jug 3 per Carton

LATICRETE

Waterproof Membranes

Information

Pricing (excl GST)

Laticrete 9235 Liquid Waterproof Membrane



9235 is an extra heavy duty thin load bearing membrane suitable for use under ceramic tile and stone in swimming pools, on facades, industrial and commercial tile installations as well as bathrooms and balconies. 9235 is liquid applied with a brush or roller, 9235 has a non woven reinforcing fabric when with cold water when fresh and is compatible with all Laticrete tile and stone

installation materials. 9235 is a certified crack suppression material used for the isolation of non structural cracks in substrates prior to installing tile or stone.

Packaging/Coverage

Full Unit 23 litres liquid & 25 m² fabric + 3.75m2 fabric.

23 litre pail 36 per Pallet

Reinforcing Fabric 1mx25m roll (comes in 2 types forming and non forming)

Reinforcing Fabric 150 mmx25m roll (comes in 2 types forming & non forming)

purchased as a full unit. 9235 cleans up

Laticrete 9237 Liquid Waterproof



9237 liquid applied waterproof membrane is a 2 coat medium to heavy duty membrane used for a wide variety of projects from Domestic bathrooms to Commercial installations. 9237 is an economical and fast to apply membrane. Use 9237 reinforcing fabric in all joints and corners, apply 2 coats of membrane to all other areas. Laticrete recommend using full reinforcing fabric for timber floors.

Packaging:

19 litre Pail 36 per Pallet

Reinforcing Fabric 1mx25m roll (comes in two types, forming and non-forming)

Reinforcing Fabric 150mmx25m roll (comes in two types, forming and non-forming)

Laticrete 9240 Liquid Waterproof Membrane



LATICRETE 9240 Waterproofing Membrane with Bio Barrier is an easy to use liquid waterproofing designed for use under thin & thick bed installations of ceramic tile and stone in wet areas such as bathrooms, spas and kitchens. Protects substrates behind the tiles from water damage and inhibits stain causing

mold and mildew growth with Bio Barrier anti-microbial protection. Use reinforcing fabric on all joints and corners, apply 2 coats of membrane to all other areas. Full reinforcing fabric required in some areas. For internal and external use.

Packaging:

19 litres Pail 36 per Pallet

7.6 litres Pails 80 per Pallet

4 litre pails 3 per Carton

Reinforcing Fabric 1mx25m roll (comes in 2 types forming and non forming)

Reinforcing Fabric 150 mmx25m roll (comes in 2 types forming & non forming)

Hydro Ban Liquid Applied Membrane



Hydro Ban is a thin, load bearing waterproofing/crack isolation membrane that DOES NOT require the use of fabric in the field, coves or corners. LATICRETE Hydro Ban is a single component self curing liquid rubber polymer that forms a flexible, seamless waterproofing membrane. LATICRETE Hydro Ban bonds

directly to a wide variety of substrates. Perfect for façade and swimming pool use.

Packaging:

19 litres Pails 36 per Pallet

7.6 litre Pails 80 per Pallet

3.8 litre Pails 4 per Carton



Sound Control Products

Information

Pricing (excl GST)

Laticrete AttenuMat-720 Sound Control

LATICRETE AttenuMat-720 Sound Control Underlayment is a composite of recycled rubber particles and other selected sound attenuating granules to form a high density acoustical control mat in available in varying thickness to aid in sound transmission reduction in tiled and other types of internal floor installations.



Packaging:

1.2m x 10m x 5mm thick rolls 16 rolls to the pallet

Laticrete # 150 Sound Control Membrane

LATICRETE 150 Sound

Control Membrane is a high performance self adhesive acoustical underlayment system that muffles impact noise and reduces sound transmission through ceramic tiles, stone and other hard surfacing materials.



Packaging:

13.5m²/roll 30 rolls to the pallet

Primer:

20 litre Pail 48 per Pallet

5 litre Jug 3 per Carton

Sound Control Underlayment # 18

STANDARD CONFIGURATION FLOOR/CEILING ASSEMBLY (WITH SUSPENDED CEILING/INSULATION)



SCU # 18 is a thin load bearing acoustical underlayment which reduces the transmission of sound through hard flooring. SCU # 18 consists of two factory proportioned components which are job mixed to form a permanent sound dampening compound. Non hazardous and non flammable. This compound is easily applied by trowel and cures rapidly

Coverage:

12m² at 12mm thick


Packaging:

3x16.5 litre Part A Liquid

5x20kg Part B Powder



PL100



For superior service and technical support, please call your nearest state office.



A Laticrete innovation brings the first plastic bags to the tile adhesive industry. Another success in a long line of firsts.

FLAT CRETESYSTEM

Flinders Street Station, Platforms, Melbourne Royal Brisbane Hospital, Hydrotherapy Pool, Brisbane **Crown Casino, Paving & Swimming Pools, Melbourne** Star Casino, Paving , Bathrooms& Swimming Pools, Sydney Queens Street Mail, Granite Paving, Brisbane Coca Cola, Lae, Papua New Guinea Mareeba Shire, Street Scape Tiling, Mareeba, Old Latrobe University, Stone Façade, Melbourne Monash University, Tiled Façade, Melbourne **Robertson Barracks, Swimming Pools, Darwin Liverpool Aquatic Centre, Swimming Pools, Sydney Pyrmont Bay Footpaths, Granite Paying, Sydney Smithfield Shopping Centre, Floor Tiling, Cairns** Trinity Swimming Pools, Cairns **Observatory Tower, Apartments, Sydney Warringah Mall, Waterproofing & Paving, Sydney** Docklands Stadium, Commercial Kitchens, Melbourne National Library Podium, Canberra. **Sydney Aquatic Centre. Parliament House Swimming Pool. David Jones, Elizabeth St Store.**

Laticrete PTY LTD

Head Office.
29 Telford Street
Virginia. QLD. 4014, Australia.
P.O. Box 508
Virginia. QLD. 4014, Australia.
Toll Free Phone: 1800 331 012
Phone: 07 3865 1599
Toll Free Fax: 1800 808 549
Fax: 07 3865 2250

Email: laticreteoz@laticrete.com.au **Internet:** www.laticrete.com.au

Sales & Technical Advice VIC: 0407 817 236 NSW: 0418 761 428 QLD: 0418 393 642



External Stone Pavement



Swimming Pools



Andrew Boy Charlton being tiled



LATICRETE TILE & STONE INSTALLATION MATERIALS