



Create Seamless Shadowline the Easy Way with the new

INTRIM 800 SERIES SHADOWLINE SYSTEM

Eliminate the inconvenience of a P50 angle and save time with the 800 Series door jamb & skirting continuous shadowline profiles



INTRIM 800 SERIES SHADOWLINE SYSTEM

The Intrim 800 Series Shadowline System consists of the following profiles.

- DJ800 FJ Pine Shadowline Door Jamb to suit both 70mm and 90mm stud widths. Available in 30mm and 40mm thickness
- SK800 Shadowline Skirting Board to suit 10mm and 13mm plasterboard thickness.

FAQ's

1. At what stage of my project is the Intrim 800 Series Shadowline door jamb and skirting installed?

They are both installed prior to the plasterboard installation. Door jambs are assembled by forming mitre joints where the head join the stiles as opposed to the traditional half joint.

The door jamb is then installed and packed plumb and level. It is critical that the jamb material is centrally located over the framing material and runs parallel with the framing material so that the PVC (PLTB 630) plaster extrusion fits neatly against the door jamb material.

Skirting is installed to fit tightly between the door jambs (see detail A and C).

The plasterboard sheets are then installed tight against the back face of the 800 Series door jamb and on top of 800 Series skirting.

The PVC (PLTB 630) stop bead is then installed to surround the door jambs. All joints between the bottom edge of plasterboard sheeting and top edge of shadowline skirting are to be plaster set and must also include reinforcing joint tape when setting. Also plaster set all PVC stop beads surrounding the door jambs.

2. What material is the Intrim 800 Series Skirting available in?

The Intrim 800 Series Skirting is available in both MR MDF and Fingerjointed Pine. Use 12mm thick MR MDF or Fingerjointed Pine for 10mm plasterboard and 15mm thick Fingerjointed pine for 13mm plasterboard.

The overall height of the skirting available is 65mm, 90mm, 135mm, 140mm, 185mm, 190mm, 230mm, 240mm, 285mm and 290mm. The top of the shadowline groove finishes 35mm lower than the overall height of the skirting, eg. 140mm high skirting less 35mm = 105mm finished height to the top of the 10mm shadowline groove.

3. Is the Intrim 800 Series Door Jamb available in different section sizes to suit different width wall framing and plasterboard thicknesses?

Yes. We are able to manufacture these to suit any application.

4. Is Shadowline 800 Series skirting suitable for carpet and timber flooring applications?

Yes. The one piece SK800 profile is suitable for carpet finish and the 2 piece profile is used in timber flooring applications. Please call 1800 867 476 for details on the two piece skirting for timber flooring or tile applications.




View a video of SK800 installation

INTRIM 800 SERIES SHADOWLINE SYSTEM

Detail A. Intrim Shadowline 800 Series Door Jamb


A cross sectional top/plan view Typical door jamb intersection with 10mm plasterboard & 70mm wall framing. © copyright



Detail B. Intrim Shadowline 800 Series Skirting

A cross sectional side/end view Typical skirting intersection with 10mm plasterboard & 70mm wall framing.

© copyright

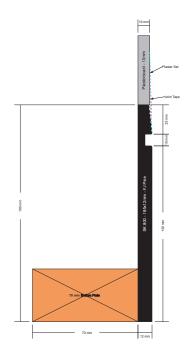

PATENT APP: 2014100509








INTRIM 800 SERIES SHADOWLINE SYSTEM

Detail C. Intrim Shadowline 800 Series Door Jamb


A cross sectional top/plan view Typical door jamb intersection with 13mm plasterboard & 90mm wall framing. © copyright



Detail D. Intrim Shadowline 800 Series Skirting

A cross sectional side/end view Typical skirting intersection with 13mm plasterboard & 90mm wall framing.

© copyright



PATENT APP: 2014100509





A division of:



Est. 23 years

P 02 4677 8000

F 02 4677 3890

E intrim@tmpgroup.com.au

W www.tmpgroup.com.au