

Product Data Sheet



Type/Item No: RLED48SLT

Features:

High Output LED 48w LED adjustable shoplight, the main body is manufactured from die cast aluminium with ultra pure aluminium extrusion heat sink.


Supplied as standard with semi frosted glass.

The LED driver is remote mounted and supplied with the downlight. Using new generation CREE Led. Supplied in white powder coated paint finish. Ideally designed as replacement for the 70w or 150w metal halide shoplight. Ribbed diecast heat sink assembly fitted to the back designed as an active cooling system

Rated life 40000hrs

Adjustable Angle 60Deg

Supplied complete with LED driver and 3 pin flex & plug base

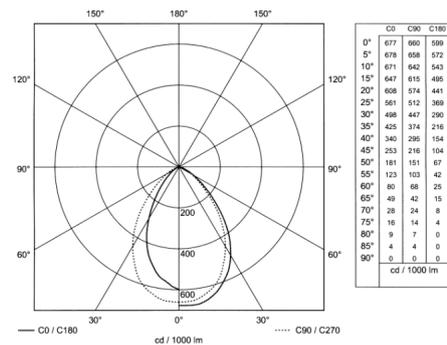

Class: 1 **IP:** 40 **Colour:** White Trim

Lamp:

132 piece Samsung (48w LED)


Gear:

COMPLIANCES:

Magnetic Emission EN55015
 Harmonic EN61000-3-2
 Flicker EN61000-3-3
 Immunity EN61547
 Safety EN61347-1
 Tested to IEC 61347-2-13(LED control gear)

SAA approval SAA120672EA

LED Lamp Output	
Luminous Flux	4200lm
Luminous Efficacy	84lm/w
Input Power	50w
Colour Temperature	4000K
CRI	>81
Operating Temperature	-20c to +40c
Power factor	PF>0.9

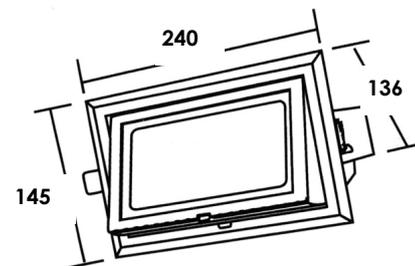

Cut Out 227 x 130mm

Dimensions:

As Shown

