



ENGINEERED TO BE BETTER

BATTERY POWER SENSOR TAP - WALL MOUNTED

The Australian designed and manufactured, *AutoAqua* S38 Wall - Std Battery Power Sensor Tap is suitable for a range of hand washing applications, particularly in public commercial areas that experience high traffic and therefore high usage, meaning conservation of water is of paramount importance. The 6-star WELS rating ensures hygienic bathroom environments for users, delivered economically and in an environmentally sensitive fashion.

The robust construction is complemented with an array of features ensuring consistent performance. The ability to self-range to its environment, the hygienic self-flush performed every 24 hours, the extra long life battery module, coupled with its sleek design are just some of what sets apart the *AutoAqua* S38 Wall - Std Battery Power Sensor Tap from similar models in the market.


FEATURES

- Operating range self-initialisation
- 4 5 year standard battery life in normal operating conditions
- Spray type flow controller for economical water usage
- Auto Hygienic Self Flush every 24 hours
- Dual stage water filters to avoid solenoid blockages
- Optional remote control for adjustment from factory settings



Order Code: 100-0193

TYPICAL DIMENSIONS

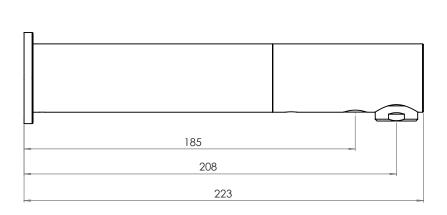









Every effort is made to ensure specifications are correct at the time of printing. Autoflo Pty Ltd reserves the right to make changes without prior notice. All measurements shown are in millimetres.





ENGINEERED TO BE BETTER

BATTERY POWER SENSOR TAP - WALL MOUNTED

TECHNICAL SPECIFICATIONS

- TAP BODY Solid brass chrome plated
- SENSOR RANGE 120mm factory set
- OPERATING SUPPLY 6v Battery Module
- OPERATING PRESSURE 50 to 500kPa
- RUN TIME Continuous 2 minutes max.
- FLOW RATING 3.5 litres per minute
- SOLENOID Latching/soft closing, brass body
- MAX TEMPERATURE 50°C




TYPICAL INSTALLATION

COMPONENTS SUPPLIED

		Item Code	Description
	1	300-5120	S38 Wall - Std body with sensor
	2	300-5122	S38 Wall mounting kit
	3	300-0110	6V Solenoid Valve
	4	300-0202	6V Battery Module
	5	600-0147	M10 to ½"BSP flex 500mm (1)
	6	600-0133	½" BSP M/M nipple C/P (2)
		*Mains version available. Order Code: 100-0194 *Surface finish variations available on special order	

Conditions Apply





Autoflo Pty Ltd www.autoflo.com.au

Autoflo, AutoAqua and their logos are registered trademarks.