

PILLAR-TOUCH

ENGINEERED TO BE BETTER

MAINS POWER TOUCH TAP - DECK MOUNTED

The Australian designed and manufactured, **Autoflo Pillar-Touch** Mains Power Touch Tap is suitable for a range of hand washing applications ranging from public commercial areas such as public facilities to private commercial bathrooms. Any application where a sensor tap is not suitable and when a unique and stylish bathroom feature is as important as water conservation, the **Autoflo Pillar-Touch** is a first choice option.

The robust construction is complemented many features ensuring consistent performance. The "lit-up" push button informs the user of the function and is far easier to control compared to mechanical push-button taps. The **Autoflo Pillar-Touch** Mains Power Touch Tap is an affordable, high performance electronic tap.


FEATURES


- Striking black and chrome contrast
- Meaningful tactile feedback from micro-travel push button
- Green, Orange and Blue colours available for illuminated push button
- Adjustable maximum run time (8 secs per push as standard setting).
- Simple operation
- Dual stage water filters to avoid solenoid blockages



Order Code: 100-0183

TYPICAL DIMENSIONS











Every effort is made to ensure specifications are correct at the time of printing. Autoflo Pty Ltd reserves the right to make changes without prior notice. All measurements shown are in millimetres.



PILLAR-TOUCH

ENGINEERED TO BE BETTER


MAINS POWER TOUCH TAP - DECK MOUNTED

TECHNICAL SPECIFICATIONS

- TAP BODY Solid brass chrome plated
- ACTIVATION Micro travel push button
- OPERATING SUPPLY 9v DC Power Pack
- OPERATING PRESSURE 50 to 500kPa
- RUN TIME 8 15 secs auto set, or on/off
- FLOW RATING 6.5 litres per minute
- SOLENOID Latching/soft closing
- MAX TEMPERATURE 50°C



TYPICAL INSTALLATION

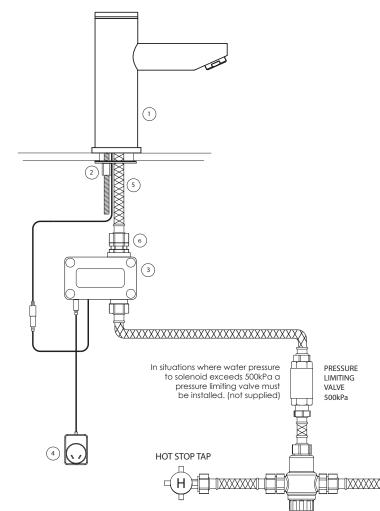

COMPONENTS SUPPLIED

	Item Code	Description
1	300-5104	Pillar Touch body
2	300-0132	Pillar mounting kit
3	300-0210	6V Solenoid Control box
4	600-0105	9V Power Pack
5	600-0145	M10 to ½"BSP flex 500mm (1)
6	600-0133	½" BSP M/M nipple C/P (1)

*Surface finish variations available on special order Conditions Apply



Autoflo Ptv Ltd

TEMPERING VALVE

COLD STOP TAP